



US008081263B2

(12) **United States Patent**
You et al.

(10) **Patent No.:** **US 8,081,263 B2**
(45) **Date of Patent:** **Dec. 20, 2011**

(54) **DISPLAY APPARATUS AND DRIVING METHOD THEREOF**

(75) Inventors: **Hye-ran You**, Yongin-si (KR);
Yoon-sung Um, Yongin-si (KR); **Jae-jin Lyu**, Yongin-si (KR); **Seung-beom Park**, Seoul (KR); **Jin-won Park**, Suwon-si (KR); **Hoon Kim**, Ansan-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.** (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/976,910**

(22) Filed: **Dec. 22, 2010**

(65) **Prior Publication Data**

US 2011/0090447 A1 Apr. 21, 2011

Related U.S. Application Data

(62) Division of application No. 12/077,496, filed on Mar. 18, 2008, now Pat. No. 7,894,008.

(30) **Foreign Application Priority Data**

Jun. 29, 2007 (KR) 10-2007-0065452

(51) **Int. Cl.**
G02F 1/1343 (2006.01)

(52) **U.S. Cl.** **349/38; 349/39**

(58) **Field of Classification Search** **349/38, 349/39**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,686,976 A * 11/1997 Nishikawa 349/38

5,801,673	A *	9/1998	Shimada et al.	345/100
6,850,289	B2 *	2/2005	Lee	349/42
6,888,604	B2 *	5/2005	Rho et al.	349/146
7,294,855	B2 *	11/2007	Baek et al.	257/72
7,453,086	B2 *	11/2008	Kim et al.	257/59
7,518,687	B2 *	4/2009	Chen et al.	349/139
2003/0214472	A1	11/2003	Chen	
2004/0041149	A1 *	3/2004	Baek et al.	257/49
2004/0041153	A1 *	3/2004	Lee	257/72
2004/0169807	A1 *	9/2004	Rho et al.	349/139
2004/0183955	A1 *	9/2004	Souk et al.	349/43
2005/0162600	A1 *	7/2005	Rho et al.	349/139
2005/0179631	A1 *	8/2005	Lyu	345/87
2006/0119756	A1	6/2006	Shin et al.	
2006/0208981	A1 *	9/2006	Rho et al.	345/88
2006/0231838	A1 *	10/2006	Kim	257/59
2006/0262237	A1 *	11/2006	Chen et al.	349/38
2006/0274009	A1 *	12/2006	Lee	345/92
2007/0057887	A1	3/2007	Itakura et al.	
2007/0109238	A1 *	5/2007	Lee et al.	345/87
2007/0109482	A1	5/2007	Kim	
2007/0132695	A1	6/2007	Kim	

(Continued)


Primary Examiner — K. Cyrus Kianni

(74) *Attorney, Agent, or Firm* — Innovation Counsel LLP

(57) **ABSTRACT**

A display apparatus including a plurality of gate lines, a data line intersecting the plurality of gate lines; a first pixel unit connected with a n-th gate line of the plurality of gate lines and the data line. A second pixel unit connected with a (n+1)-th gate line of the plurality of gate lines; and a coupling capacitor disposed between the first pixel unit and the second pixel unit, wherein the first pixel unit comprises a first liquid crystal capacitor and a first thin film transistor (TFT), the second pixel unit comprises a second liquid crystal capacitor and a second thin film transistor (TFT), and a source electrode and a drain electrode of the second TFT are connected with both electrodes of the coupling capacitor, respectively.

9 Claims, 5 Drawing Sheets

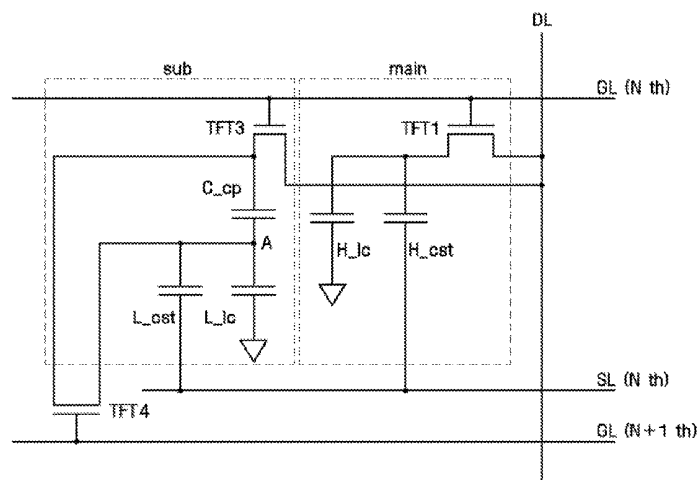

US 8,081,263 B2

Page 2

U.S. PATENT DOCUMENTS

2007/0132899	A1	6/2007	Cheng et al.	2009/0002583	A1 *	1/2009	You et al.	349/38
2007/0188431	A1	8/2007	Sato et al.	2009/0096950	A1 *	4/2009	Kim et al.	349/43
2007/0194331	A1 *	8/2007	Yeh et al.	2009/0315035	A1	12/2009	Yeh et al.	
2008/0007506	A1	1/2008	Chen et al.					

257/88

* cited by examiner

FIG. 1

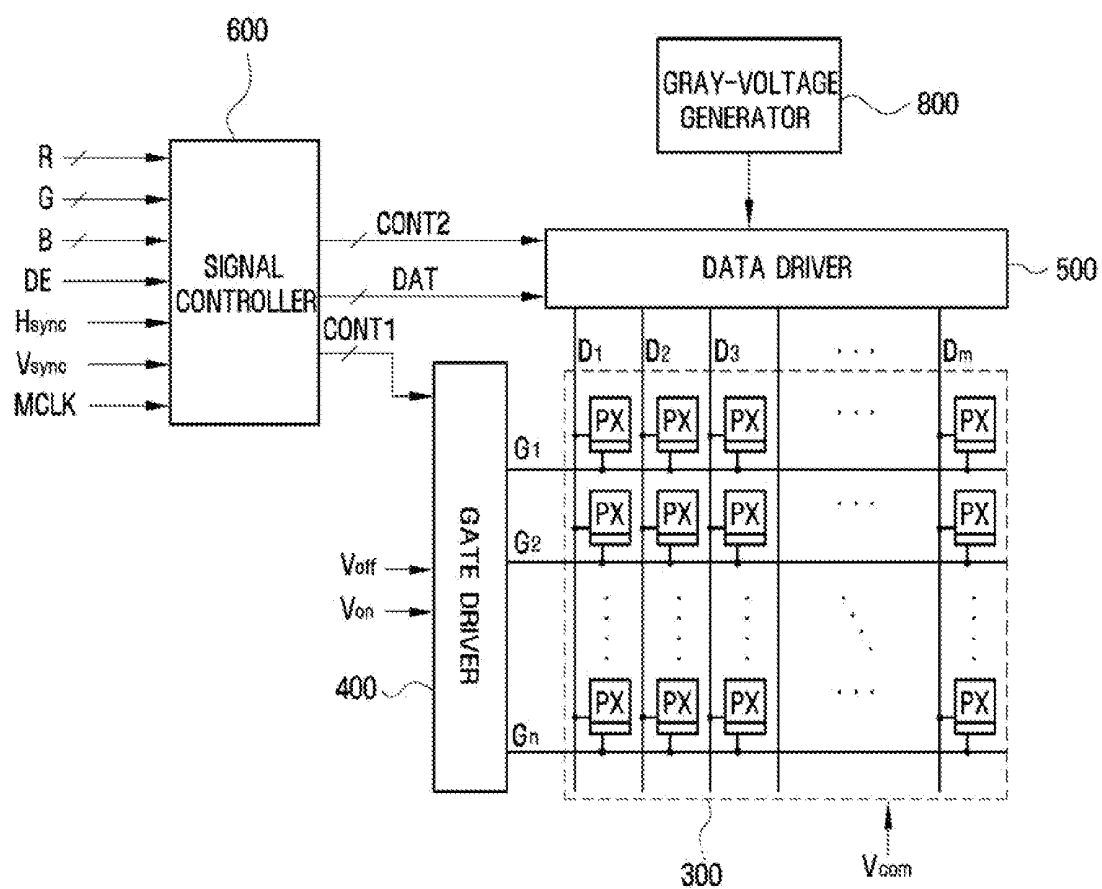


FIG. 2

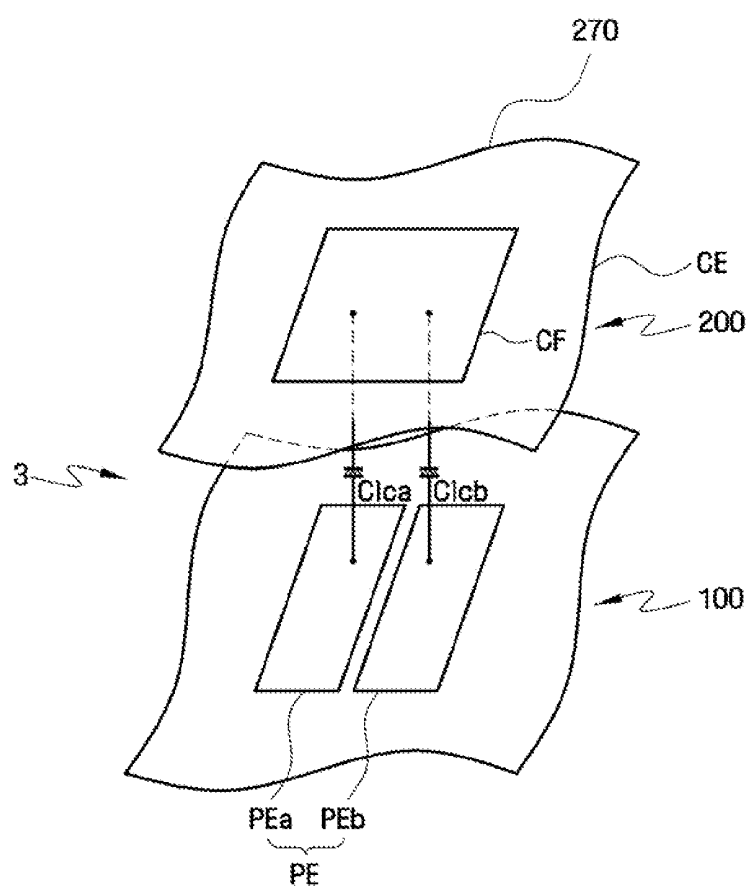


FIG. 3

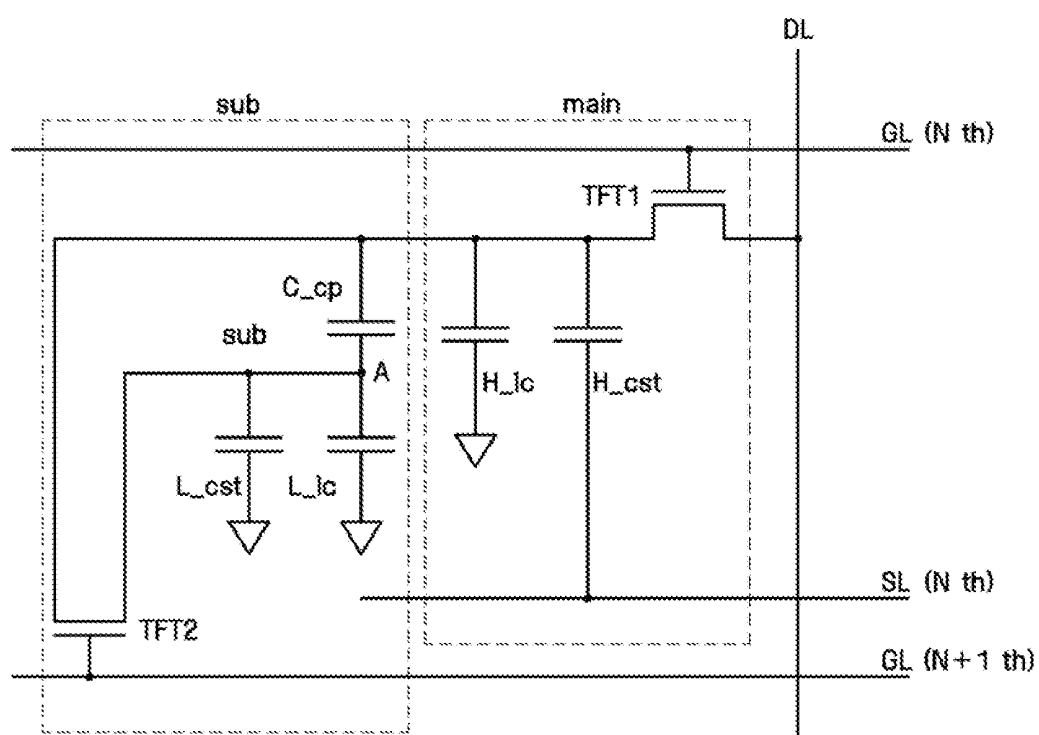


FIG. 4


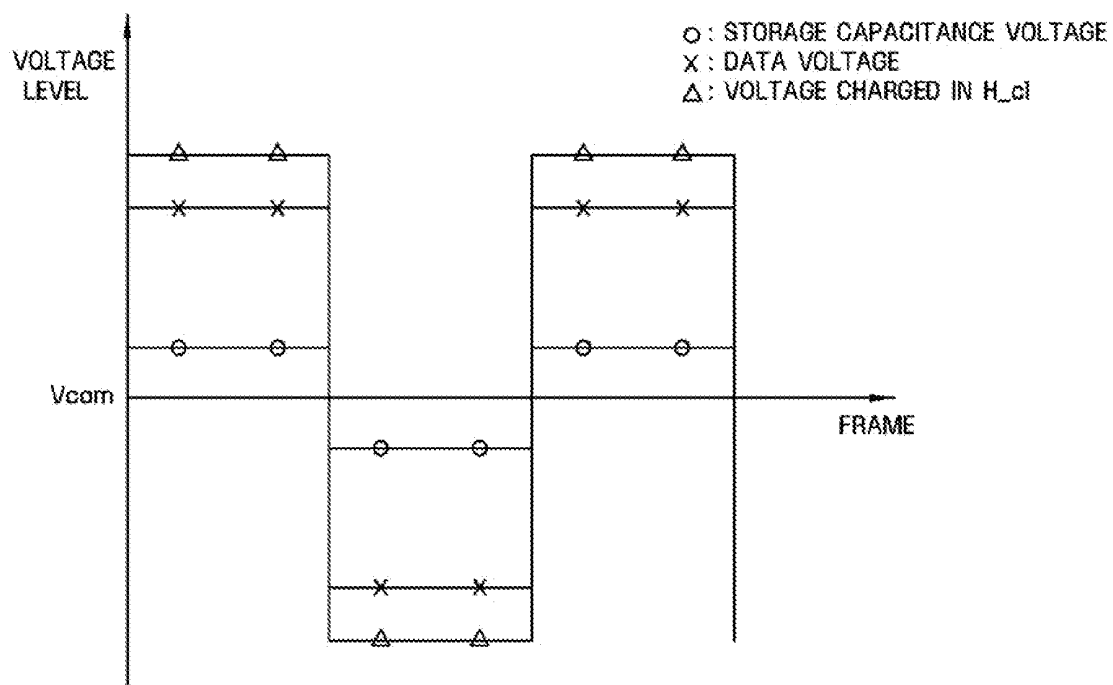


FIG. 5

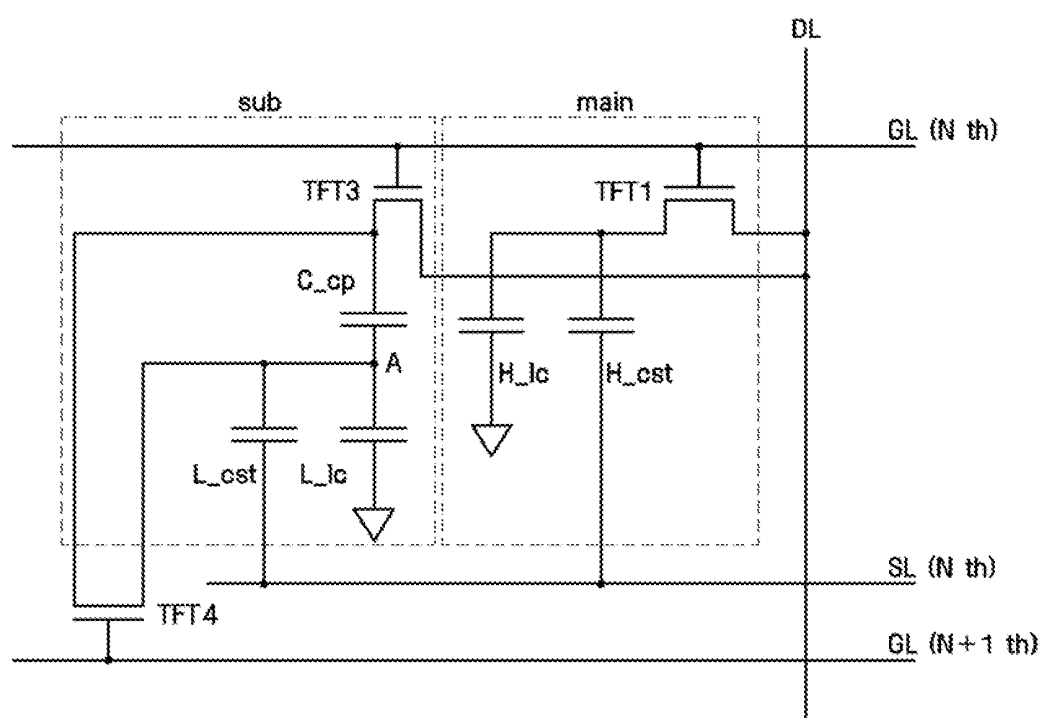

DISPLAY APPARATUS AND DRIVING METHOD THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

This application is a divisional of U.S. patent application Ser. No. 12/077,496 filed on Mar. 18, 2008, which claims priority from Korean Patent Application No. 10-2007-0065452 filed on Jun. 29, 2007, in the Korean Intellectual Property Office, the disclosures of which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a display apparatus and a driving method thereof.

2. Description of the Related Art

Liquid crystal displays (LCD) are one of the most widely used flat panel displays. An LCD typically includes two panels provided with field-generating electrodes such as pixel electrodes and a common electrode, and a liquid crystal (LC) layer interposed therebetween. The LCD displays images by applying voltages to the field-generating electrodes to generate an electric field in the LC layer. The applied electric field determines the orientations of LC molecules in the LC layer to adjust the polarization of incident light.

The LCD comprises a plurality of thin film transistors (TFT) connected with each of the pixel electrodes and a plurality of signal lines connected with the TFTs, such as gate lines and data lines.

Among the LCDs, a vertically aligned (VA) LCD, in which LC molecules are aligned such that the long axes of the LC molecules are perpendicular to the plates in the absence of an electric field, offers a high contrast ratio and a wide reference viewing angle. The reference viewing angle is defined as a viewing angle making the contrast ratio equal to 1:10 or as a limit angle for the inversion in luminance between the grays.

A wide viewing angle of the VA mode LCD can be realized by, for example, cutouts in the field-generating electrodes and protrusions on the field-generating electrodes. The cutouts and the protrusions can determine the tilt directions of the LC molecules. The tilt directions can be distributed in several directions by using the cutouts and the protrusions such that the reference viewing angle can be widened.

However, the cutouts and the protrusions decrease the aperture. Also, the lateral visibility of the VA mode LCD is low. For example, images displayed by a patterned vertically aligned (PVA) LCD equipped with the cutouts become brighter nearer to the lateral sides of the PVA LCD, thereby decreasing lateral visibility.

In order to improve lateral visibility of an LCD, a variety of methods of dividing a pixel electrode into a pair of sub-pixel electrodes, applying voltage to the one sub-pixel electrode using thin film transistor (TFT) and applying voltage to the other sub-pixel electrode using a coupling capacitor so that the sub-pixel electrodes can be supplied with different voltages have been suggested.

SUMMARY OF THE INVENTION

Aspects of the present invention provide a display apparatus having excellent lateral visibility without image sticking.

Aspects of the present invention also provide a driving method of a display apparatus having excellent lateral visibility without image sticking.

However, the aspects of the present invention are not restricted to ones set forth herein. The above and other aspects of the present invention will become apparent to one of ordinary skill in the art to which the present invention pertains by referencing the detailed description of the present invention given below.

According to a first aspect of the present invention, there is provided a display apparatus including: a plurality of gate lines; a data line intersecting the plurality of gate lines; a first pixel unit connected with a n -th gate line of the plurality of gate lines and the data line; a second pixel unit connected with a $(n+1)$ -th gate line of the plurality of gate lines; and a coupling capacitor disposed between the first pixel unit and the second pixel unit, wherein the first pixel unit comprises a first liquid crystal capacitor and a first thin film transistor (TFT), the second pixel unit comprises a second liquid crystal capacitor and a second thin film transistor (TFT), and a source electrode and a drain electrode of the second TFT are connected with both electrodes of the coupling capacitor, respectively. One electrode of the first liquid crystal capacitor and one electrode of the coupling capacitor are formed of a first pixel electrode. Here, the first pixel electrode is formed of transparent metal. One electrode of the second liquid crystal capacitor and the other electrode of the coupling capacitor are formed of a second pixel electrode. Here, the second pixel electrode is formed of transparent metal.

The display apparatus further comprises a plurality of storage electrode lines, wherein the first pixel unit comprises a storage capacitor connected with the n -th storage electrode line of the plurality of storage electrode lines and the first TFT. Here, a storage-capacitance voltage applied to the n -th storage electrode line has a fixed or variable level.

According to a second aspect of the present invention, there is provided a display apparatus including: a plurality of gate lines; a data line intersecting the plurality of gate lines; a first pixel unit connected with a n -th gate line of the plurality of gate lines and the data line, comprising a first liquid crystal capacitor and a first thin film transistor (TFT); a second pixel unit connected with the n -th gate line and the data line, comprising a second liquid crystal capacitor and a second thin film transistor (TFT); and a third thin film transistor (TFT) connected with the $(n+1)$ -th gate line of the plurality of gate lines and second pixel unit, wherein a coupling capacitor is disposed between a drain electrode of the second TFT and one electrode of the second liquid crystal capacitor. A gate electrode of the third TFT is connected with the $(n+1)$ -th gate line, a source electrode of the third TFT is connected with the drain electrode of the second TFT and one electrode of the coupling capacitor, a drain electrode of the third TFT is connected with the one electrode of the second liquid crystal capacitor and the other electrode of the coupling capacitor. Here, the first pixel unit further comprises a first storage capacitor, and one electrode of the first liquid crystal capacitor and one electrode of the first storage capacitor are formed of a first pixel electrode.

The display apparatus further comprises a plurality of storage electrode lines, wherein the other electrode of the first is connected with a n -th storage electrode line of the plurality of storage electrode lines. Here, a storage-capacitance voltage applied to the n -th storage electrode line has a fixed or a variable level. The second pixel unit further comprises a second storage capacitor, and the one electrode of the second liquid crystal capacitor, the one electrode of the second storage capacitor and the other electrode of the coupling capacitor are formed of a second pixel electrode. Here, the second pixel electrode is formed of transparent metal.

According to a third aspect of the present invention, there is provided a driving method of a display apparatus including:

applying a data voltage to a first pixel unit and a second pixel unit connected with the first pixel unit through a coupling capacitor, and discharging the coupling capacitor. Here, the discharging of the coupling capacitor comprises providing electric charge in the coupling capacitor to the second pixel unit. When the first pixel unit and the second pixel unit are connected with a first gate line, the applying of a data voltage is enabled by a first gate signal applied to the first gate line, and the discharging of the coupling capacitor is enabled by a second gate signal applied to a second gate line. The first pixel unit comprises a first liquid crystal capacitor including a first pixel electrode and a common electrode, and a first storage capacitor including the first pixel electrode and a storage-capacitance electrode, and the applying of a data voltage comprises applying a storage-capacitance voltage having a fixed level to the storage-capacitance electrode, or the applying a data voltage comprises applying a storage-capacitance voltage having a variable level to the storage-capacitance electrode.

Details of other embodiments of the invention are included in the detailed description of the invention and the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram illustrating a liquid display apparatus according to an exemplary embodiment of the invention;

FIG. 2 is a pictorial, perspective diagram illustrating a pixel of the type employed in FIG. 1;

FIG. 3 is an equivalent circuit diagram of the a pixel of a liquid display apparatus according to an embodiment of the invention;

FIG. 4 is a signal diagram illustrating signals of the type used in an operation of a pixel of the type illustrated in FIG. 3; and

FIG. 5 is an equivalent circuit diagram of a pixel of a liquid display apparatus according to another exemplary embodiment of the invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Advantages and features of the present invention and methods of accomplishing the same may be understood more readily by reference to the following detailed description of exemplary embodiments and the accompanying drawings. The present invention may, however, be embodied in many different forms and should not be construed as being limited to the exemplary embodiments set forth herein. Rather, these exemplary embodiments are provided so that this disclosure will be thorough and complete and will fully convey the concept of the invention to those of ordinary skill in the art, and the present invention will only be defined by the appended claims.

FIG. 1 is a block diagram of a liquid crystal display apparatus according to an exemplary embodiment of the invention, and FIG. 2 is a diagram illustrating the type of pixel utilized in the FIG. 1 embodiment.

Referring to FIG. 1, the liquid crystal display apparatus according to an exemplary embodiment of the invention includes a liquid crystal panel assembly 300, a gate driver 400, a data driver 500, a gray-voltage generator 800, and a signal controller 600.

In the an electrical equivalent circuit, the liquid crystal panel assembly 300 includes a plurality of display lines G1 through Gn and D1 through Dm, and a plurality of pixels PX connected to the plurality of display lines G1 through Gn and

D1 through Dm and arranged in a matrix. Referring to FIG. 2, the liquid crystal panel 300 includes a first substrate 100 and a second substrate 200 facing each other, and a liquid crystal 3 interposed between the first and second substrates 100 and 200.

Signal lines comprise a plurality of gate lines for transmitting gate signals (also called "scan signals"), and a plurality of data lines D1 through Dm for transmitting data signals. The plurality of gate lines G1 through Gn extend in a row direction and are parallel or essentially parallel to one another, and the plurality of data lines D1 through Dm extend in a column direction and are parallel or essentially parallel to one another.

Each of pixels PX comprises a pair of pixel units, and each of the pixel units comprises liquid crystal capacitors Clca and Clcb, respectively. At least one of the pixel units comprise a gate line, data line, and switching element (not shown) connected with liquid crystal capacitor Clca or Clcb.

The liquid crystal capacitors Clca, Clcb have pixel unit electrodes PEa and PEb formed on the first substrate 100 and a common electrode CE formed on the second substrate 200, respectively, as two electrodes. The liquid crystal layer disposed between the pixel unit electrodes PEa and PEb and the common electrode 270 functions as a dielectric. The pair of pixel unit electrodes PEa and PEb are separated from each other, and make one pixel electrode PE.

The common electrode CE is connected to the common voltage Vcom, and covers the entire surface of the second substrate 200. The liquid crystal layer 3 has negative dielectric anisotropy ($\Delta\epsilon < 0$), i.e., the long axes of the liquid crystal molecule are aligned vertically with respect to a field-generating direction. Alternatively, the common electrode 270 may be disposed on the first substrate 100, and, in this case, at least one of the pixel electrode PE and the common electrode 270 may have shapes resembling bars or stripes.

For a color display, each pixel PX uniquely represents one of three primary colors such as red, green and blue (R, G and B) colors (spatial division) or sequentially represents the three primary colors in time (temporal division), thereby obtaining a desired color. FIG. 2 is an equivalent circuit diagram of a spatial division. A color filter CF may be formed in a portion of a common electrode CE of the second substrate 200.

One or more polarizers (not shown) may be attached to at least one of the first substrate 100 and the second substrate 200 to transform light polarization into light transmittance.

The gamma voltage generator 800 generates two sets of a plurality of gray voltages related to the transmittance of the pixels. The data voltages in one set have a positive polarity with respect to the common voltage Vcom, while those in the other set have a negative polarity with respect to the common voltage Vcom. The positive-polarity data voltages and negative-polarity data voltages are alternately supplied to the liquid crystal panel 100 during inversion driving.

The gate driver 400 is connected to the gate lines G1-Gn of the liquid crystal panel assembly 300, and applies gate signals from an external device to the gate lines G1-Gn, each gate signal being a combination of a gate-on voltage Von and a gate-off voltage Voff.

The data driver 500 is connected to the plurality of data lines D1-Dm of the liquid crystal panel assembly 300. The data driver 500 generates gray voltages based on a plurality of voltages supplied from the gamma voltage generator 800, selects the generated gamma voltages, and applies the gamma voltages to each pixel as data signals.

The signal controller 600 controls the gate driver 400 and the data driver 500.

The gate driver **400**, the data driver **500** or the gamma voltage generator **800** may be directly mounted on the liquid crystal panel assembly **300** in the form of at least one IC chip on the liquid crystal panel assembly **300**. Alternatively, the gate driver **400** or the data driver **500** may be attached to the liquid crystal panel **300** in the form of a tape carrier package ("TCP") on a flexible printed circuit ("FPC") film (not shown) in the liquid crystal panel assembly **300**. Alternatively, the gate driver **400** or the data driver **500** together with the plurality of display lines G1 through Gn and D1 through Dm, and switching devices Q may be integrally formed with the liquid crystal panel assembly **300**.

FIG. 3 is an equivalent circuit diagram of a pixel of a liquid display apparatus according to an embodiment of the invention.

The liquid crystal panel assembly **300** comprises the plurality of gate lines GL, and the data line DL, and pixels PX coupled to associated ones gate line GL and the data lines DL.

The pixel PX comprises the pair of the first pixel unit main, and the second pixel unit sub, and the coupling capacitor C_{cp} connected between the first pixel unit main and the second pixel unit sub.

The first pixel unit main comprises a first TFT T_{FT1} connected with the n-th gate line GL and the data line DL, a first liquid crystal capacitor H_{lc} connected with the first TFT T_{FT1}, and the first storage capacitor H_{cst} connected with the first TFT T_{FT1}. The second pixel unit sub comprises the second TFT T_{FT2} connected with the (n+1)-th gate line GL, the second liquid crystal capacitor L_{lc} connected with the first TFT T_{FT1}, and the second storage capacitor L_{cst} connected with the second TFT T_{FT2}.

The coupling capacitor C_{cp} is disposed between the first pixel unit main and the second pixel unit sub. However, only one of the first storage capacitor H_{cst} and the second storage capacitor L_{cst} may be disposed.

One electrode of first liquid crystal capacitor H_{lc} and one electrode of the first storage capacitor H_{cst} may be formed of a transparent first pixel electrode, and one electrode of the second liquid crystal capacitor L_{lc} and one electrode of the second storage capacitor L_{cst} may be formed of a transparent second pixel electrode. Also, one electrode of the coupling capacitor C_{cp} may be formed of the first pixel electrode, and the other electrode of the coupling capacitor C_{cp} may be formed of the second pixel electrode.

Explaining the operation of the pixel, first, the first TFT T_{FT1} provides a data voltage with the first pixel electrode responding to the gate signal applied to the n-th gate line. The first pixel unit voltage, that is, the voltage applied to the first liquid crystal capacitor H_{lc} is provided with the second pixel unit sub by the coupling capacitor C_{cp}. When the voltage of the first liquid crystal capacitor H_{lc} is Va, and the voltage of the second liquid crystal capacitor L_{lc} is Vb, then Vb is given by Equation 1 below.

$$Vb = Va \times (C_{cp} / (C_{cp} + L_{lc} + L_{cst})) \quad (1)$$

Because the value of C_{cp}/(C_{cp}+L_{lc}+L_{cst}) is less than 1, the voltage Vb of the second liquid crystal capacitor L_{lc} is less than Va of the first liquid crystal capacitor H_{lc}.

The voltages Va and Vb are controlled by varying the capacitance of the coupling capacitor C_{cp}. The transmittance of the liquid crystal is determined by the voltage Vb of the second liquid crystal capacitor L_{lc} and then the voltage Va of the first liquid crystal capacitor H_{lc}, and then an image is displayed according to the transmittance.

Next, the second TFT T_{FT2} is turned on by a gate signal applied to the (n+1)-th gate line GL. When the second TFT T_{FT2} is turned on, the coupling capacitor C_{cp} is discharged.

That is, the charge of the coupling capacitor C_{cp} may be provided with the second liquid crystal capacitor L_{lc}. For example, if the positive data voltage is provided with the first liquid crystal capacitor H_{lc} and the second liquid crystal capacitor L_{lc}, the charge of the coupling capacitor C_{cp} may be provided with the second liquid crystal capacitor L_{lc}, and then the level of the voltage of the second liquid crystal capacitor L_{lc} is increased.

Here, the level of the voltage of the second liquid crystal capacitor L_{lc} by discharging of the coupling capacitor C_{cp} when the data voltage having high gray is provided is higher than that when the data voltage having low gray is provided. That is, the difference between the voltage Va and the voltage Vb when the data voltage having high gray is provided is higher than that when the data voltage having low gray is provided. Therefore, the lateral visibility of the display apparatus is improved.

Also, if the second TFT T_{FT2} is turned on, a path is formed through which charges produced at node A move. Thus, charge is not accumulated at node A, and image sticking can be reduced.

Here, if the ratio of channel width to channel length W/L of the second TFT T_{FT2} is very large, the voltage difference between both nodes of the coupling capacitor C_{cp} will be zero, and then the voltage Va of the first liquid crystal capacitor H_{lc} and voltage Vb of the second liquid crystal capacitor L_{lc} will be the same, so the lateral visibility of the display apparatus will not be improved. Thus, it is preferable that the ratio of channel width to channel length W/L of the second TFT T_{FT2} should not be very large.

The other electrode of the first storage capacitor H_{cst} is connected with the n-th storage electrode line SL, and a storage-capacitance voltage applied to the n-th storage electrode line SL may have a fixed level. The storage-capacitance voltage may be the common voltage V_{com} applied to the common electrode CE.

Also, the storage-capacitance voltage may have a variable level, for example, the level of the storage-capacitance voltage may vary periodically. The storage-capacitance voltage will now be described in detail with reference to FIG. 4.

The data voltage applied to the data line DL, the storage-capacitance voltage applied to the storage electrode line SL, and the voltage of the first liquid crystal capacitor H_{lc} are shown in FIG. 4. For explanatory convenience, it is assumed that the polarity of the data voltage varies with respect to the common voltage V_{com} frame by frame.

Referring to FIG. 4, when the polarity of the data voltage varies with respect to the common voltage V_{com}, the polarity of the storage-capacitance voltage varies identically with the polarity of the data voltage. For example, when the data voltage is positive with respect to the common voltage V_{com}, the storage-capacitance voltage is positive with respect to the common voltage V_{com}, and when the data voltage is negative with respect to the common voltage V_{com}, the storage-capacitance voltage is negative with respect to the common voltage V_{com}.

When the storage-capacitance voltage varies, the voltage of the first liquid crystal capacitor H_{lc} connected with the first storage capacitor H_{cst} varies as shown FIG. 4. For example, the voltage of the first liquid crystal capacitor H_{lc} may be equal to the sum of the data voltage and the storage-capacitance voltage.

As described above, if the storage-capacitance voltage varies, the voltage of first liquid crystal capacitor H_{lc} may be the predetermined voltage that is higher than the data voltage applied to the data line DL. Also, if the voltage of the first liquid crystal capacitor H_{lc} increases, the voltage of the

second liquid crystal capacitor L_{lc} increases. In this case, the transmittance of the pixel units main and sub may be improved.

A display apparatus according to a second embodiment of the present invention is illustrated in FIG. 5 which is an equivalent circuit diagram of a pixel of a liquid display apparatus according to the second embodiment of the invention.

The display apparatus according to the second embodiment of the present invention further comprises a third TFT T3 for controlling the operation of the second liquid crystal capacitor L_{lc} . In contrast to the prior embodiment, the coupling capacitor C_{cp} is not directly connected with the first liquid crystal capacitor H_{lc} , but rather is connected with the third TFT T3.

More specifically, each pixel PX comprises a main pixel unit and a sub-pixel unit. The main pixel unit and sub-pixel unit are connected with the n -th gate line GL of the plurality of gate lines and to data line DL. The main pixel unit comprises a first liquid crystal capacitor H_{lc} , first storage capacitor H_{cst} and a first TFT T1 connected with the n -th gate line GL. The sub-pixel unit comprises a second liquid crystal capacitor L_{lc} , a second storage capacitor L_{cst} , the third TFT T3 connected with the n -th gate line GL, and a coupling capacitor C_{cp} .

The gate electrode of fourth TFT T4 is connected with the $(n+1)$ -th gate line GL, the source electrode of fourth TFT T4 is connected with the drain electrode of third TFT T3 and to one electrode of the coupling capacitor C_{cp} , and the drain electrode of a fourth TFT T4 is connected with the one electrode of the second liquid crystal capacitor L_{lc} and the other electrode of the coupling capacitor C_{cp} . One electrode of the first liquid crystal capacitor H_{lc} and one electrode of the first storage capacitor H_{cst} may be formed of a transparent first pixel electrode. One electrode of the second liquid crystal capacitor L_{lc} and one electrode of the second storage capacitor L_{cst} may be formed of a transparent second pixel electrode.

The operation of the pixel illustrated in FIG. 5 is as follows. When a gate signal is applied to the n -th gate line GL, the first TFT T1 and the third TFT T3 are turned on. Therefore, the first liquid crystal capacitor H_{lc} is charged to the data voltage. Also, the data voltage is divided by the coupling capacitor C_{cp} and the second liquid crystal capacitor L_{lc} , and then the voltage on second liquid crystal capacitor L_{lc} becomes a predetermined value.

Next, when a gate signal is applied to the $(n+1)$ -th gate line, the fourth TFT T4 is turned on. Thus the coupling capacitor C_{cp} is discharged. Therefore, the charges of the coupling capacitor C_{cp} can be provided to the second liquid crystal capacitor L_{lc} , and the lateral visibility of the display apparatus is improved.

Also, when the third TFT T3 is turned on, a path is formed through which charges at node A move. Thus, charge is not accumulated at node A, and image sticking is reduced.

In the present exemplary embodiment of the present invention, though the fourth TFT T4 is turned on, the data voltage of the first liquid crystal capacitor H_{lc} may not vary, because the coupling capacitor C_{cp} is not connected with the first liquid crystal capacitor H_{lc} .

The other electrode of the first storage capacitor H_{cst} and the second storage capacitor L_{cst} are connected to the n -th storage electrode line SL, as a storage-capacitance electrode. Here, a storage-capacitance voltage applied to the storage-capacitance electrode may have a fixed level. The storage-capacitance voltage may be the common voltage V_{com} applied to the common electrode CE.

Also, the storage-capacitance voltage may have a variable level, for example, the level of the storage-capacitance volt-

age may vary periodically, as described above. In this case, the transmittance of the pixel units main and sub may be improved.

To sum up, the display apparatus and the driving method thereof according to the exemplary embodiments of the present invention provide excellent lateral visibility without incurring the image sticking phenomenon.

While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the present invention which is defined by the following claims. The exemplary embodiments are descriptive only and not limiting.

What is claimed is:

1. A display apparatus comprising:

a plurality of gate lines;

a data line intersecting the plurality of gate lines;

a first pixel unit associated with an n -th gate line of the plurality of gate lines and the data line, comprising a first liquid crystal capacitor and a first thin film transistor;

a second pixel unit associated with the n -th gate line and the data line, comprising a second liquid crystal capacitor and a second thin film transistor;

a third thin film transistor connected with an $(n+1)$ -th gate line of the plurality of gate lines and second pixel unit; wherein the first pixel unit and the second pixel unit are parts of a pixel; and

a coupling capacitor having a first electrode connected to a drain electrode of the second thin film transistor and a second electrode connected to an electrode of the second liquid crystal capacitor.

2. The display apparatus of claim 1, wherein

a gate electrode of the third thin film transistor is connected with the $(n+1)$ -th gate line,

a source electrode of the third thin film transistor is connected to the drain electrode of the second thin film transistor and the first electrode of the coupling capacitor,

a drain electrode of the third thin film transistor is connected with the one electrode of the second liquid crystal capacitor and the second electrode of the coupling capacitor.

3. The display apparatus of claim 2, wherein the first pixel unit further comprises a first storage capacitor, and one electrode of the first liquid crystal capacitor and one electrode of the first storage capacitor are formed of a first pixel electrode.

4. The display apparatus of claim 3, wherein the first pixel electrode is formed of transparent metal.

5. The display apparatus of claim 3, further comprising a storage electrode line, wherein the first storage capacitor is coupled to the storage electrode line.

6. The display apparatus of claim 5, wherein a storage-capacitance voltage applied to the storage electrode line has a fixed level.

7. The display apparatus of claim 5, wherein a storage-capacitance voltage applied to the storage electrode line has a variable level.

8. The display apparatus of claim 2, wherein the second pixel unit further comprises a second storage capacitor, and one electrode of the second liquid crystal capacitor, the electrode of the second storage capacitor and the second electrode of the coupling capacitor are formed of a second pixel electrode.

9. The display apparatus of claim 8, wherein the second pixel electrode is formed of transparent metal.

* * * * *

专利名称(译)	显示装置及其驱动方法		
公开(公告)号	US8081263	公开(公告)日	2011-12-20
申请号	US12/976910	申请日	2010-12-22
[标]申请(专利权)人(译)	你HYE RAN UM尹成 LYU JAE金 朴升BEOM 朴真WON 金勋		
申请(专利权)人(译)	YOU HYE-RAN UM YOON-SUNG LYU JAE-JIN 朴升BEOM 朴真WON 金勋		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	YOU HYE RAN UM YOON SUNG LYU JAE JIN PARK SEUNG BEOM PARK JIN WON KIM HOON		
发明人	YOU, HYE-RAN UM, YOON-SUNG LYU, JAE-JIN PARK, SEUNG-BEOM PARK, JIN-WON KIM, HOON		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/13624 G02F1/136213 G02F2001/134345		
优先权	1020070065452 2007-06-29 KR		
其他公开文献	US20110090447A1		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括多条栅极线，与所述多条栅极线交叉的数据线;第一像素单元，与多条栅极线的第n栅极线和数据线连接。第二像素单元，与多条栅极线的第 (n + 1) 栅极线连接;耦合电容器，设置在第一像素单元和第二像素单元之间，其中第一像素单元包括第一液晶电容器和第一薄膜晶体管 (TFT) ，第二像素单元包括第二液晶电容器和第二像素单元薄膜晶体管 (TFT) 和第二TFT的源电极和漏电极分别与耦合电容器的两个电极连接。

