



US 20130126837A1

(19) **United States**(12) **Patent Application Publication**
KIM et al.(10) **Pub. No.: US 2013/0126837 A1**(43) **Pub. Date: May 23, 2013**(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE****Publication Classification**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventors: **Jong Sung KIM**, Gyeonggi-do (KR);
Ho Jin KIM, Gyeonggi-do (KR)(73) Assignee: **LG DISPLAY CO., LTD.**, Seoul (KR)(21) Appl. No.: **13/681,645**(22) Filed: **Nov. 20, 2012**(30) **Foreign Application Priority Data**

Nov. 21, 2011 (KR) 10-2011-0121860

(51) **Int. Cl.****H01L 51/50** (2006.01)**H01L 51/00** (2006.01)(52) **U.S. Cl.**CPC **H01L 51/50** (2013.01); **H01L 51/0032**
(2013.01)USPC **257/40**; 257/88

(57)

ABSTRACT

An organic light emitting display device is disclosed which includes: a substrate defined into a display area and a non-display area; a light emission diode layer formed on the substrate and configured to emit light; a TFE layer formed on the light emission diode layer and configured to protect the light emission diode layer; an intrusive moisture guide layer configured to prevent moisture intrusion into the light emission diode layer; and a getter configured to absorb moisture which is guided by the intrusive moisture guide layer.

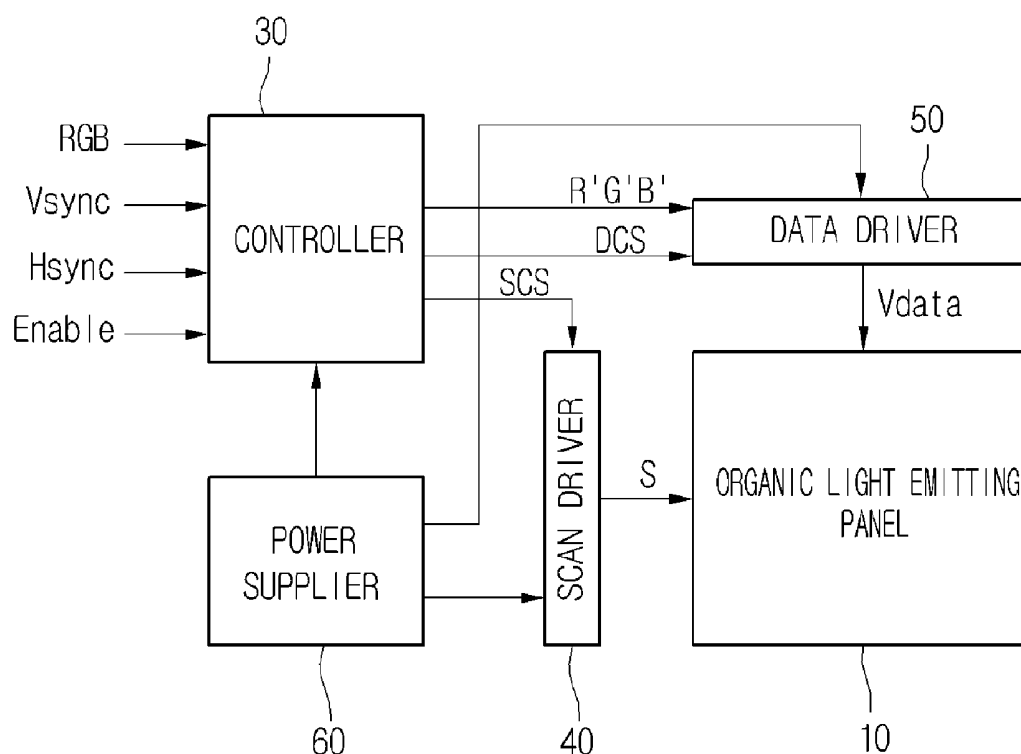


FIG. 1

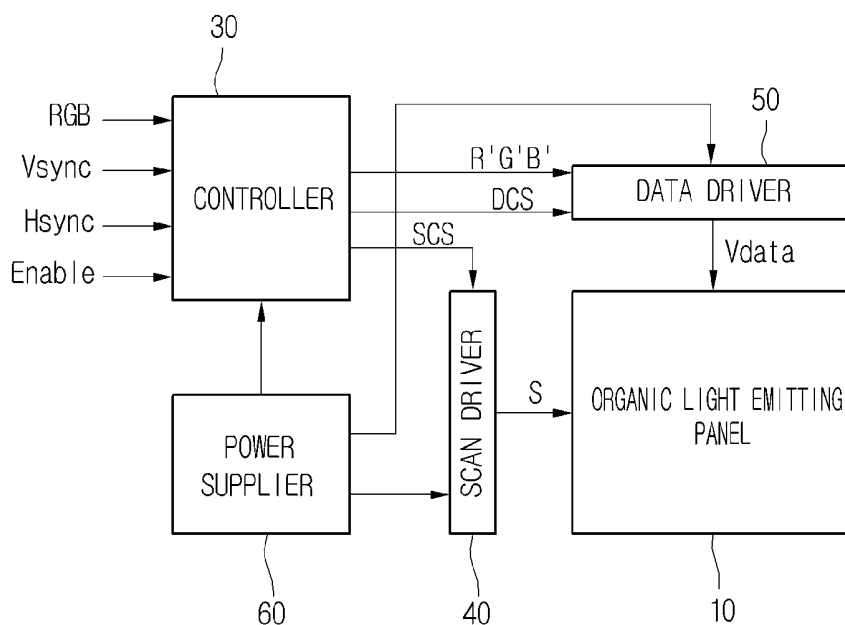


FIG. 2

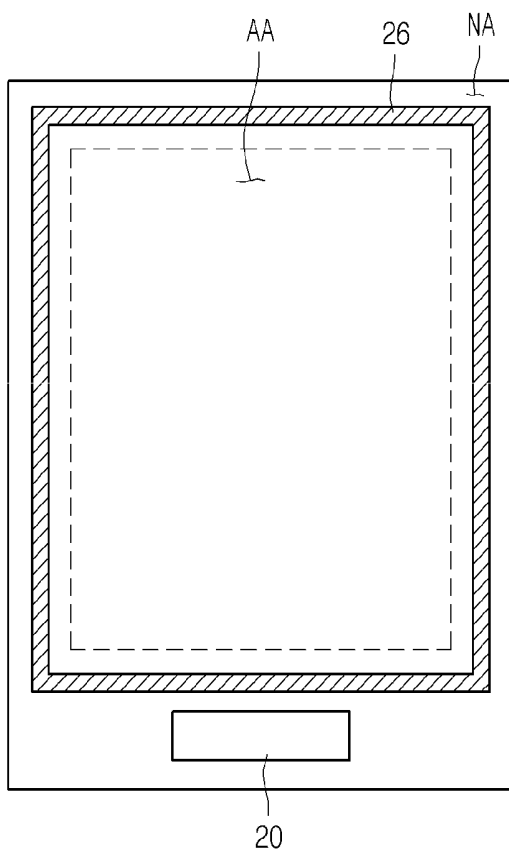


FIG.3


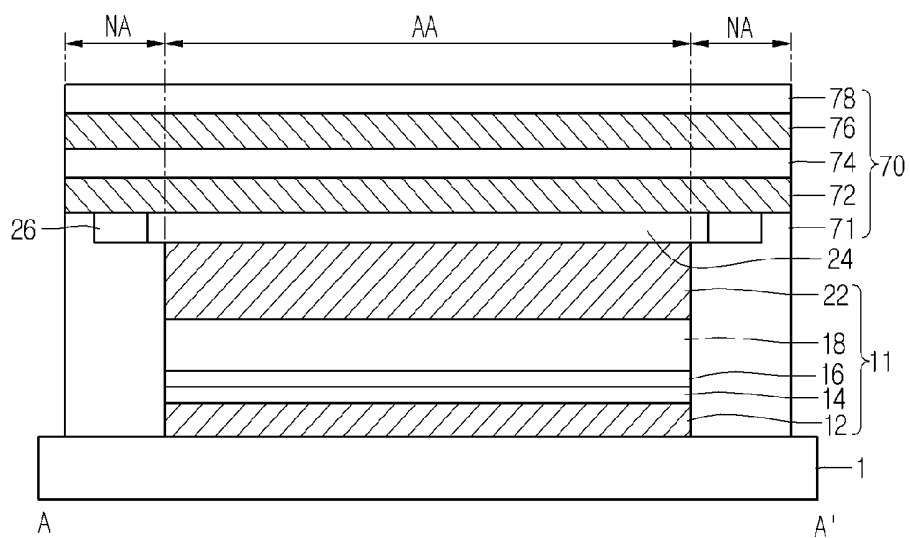


FIG.4

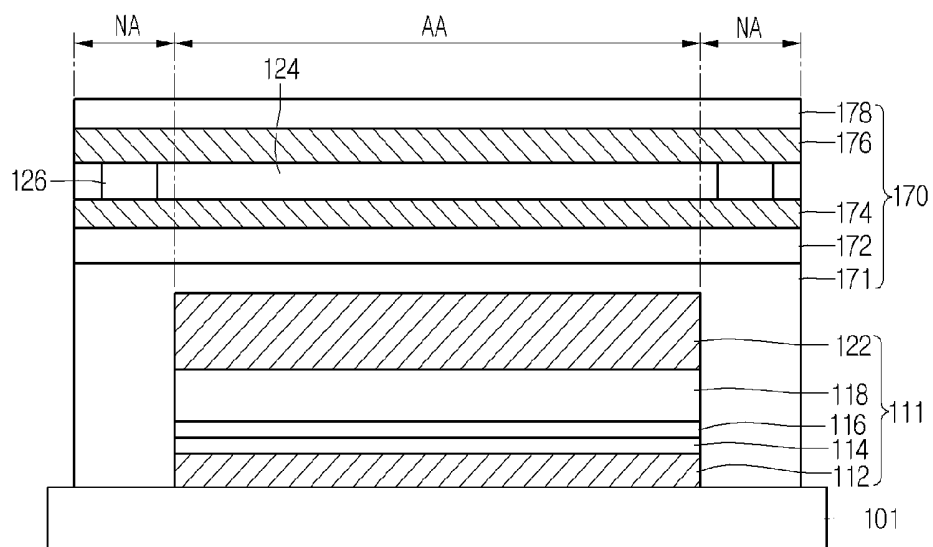

ORGANIC LIGHT EMITTING DISPLAY DEVICE

[0001] The present application claims priority under 35 U.S.C. §119(a) of Korean Patent Application No. 10-2011-0121860 filed on Nov. 21, 2011, which is hereby incorporated by reference in its entirety.

BACKGROUND

[0002] 1. Field of the Disclosure

[0003] The present application relates to an organic light emitting display device.

[0004] 2. Description of the Related Art

[0005] Devices for displaying information are being widely developed. The display devices include liquid crystal display (LCD) devices, organic light-emitting display (OLED) devices, electrophoresis display devices, field emission display (FED) devices, and plasma display devices.

[0006] Among these display devices, OLED devices have the features of lower power consumption, wider viewing angle, lighter weight and higher brightness compared to LCD devices. As such, the OLED device is considered to be next generation display devices.

[0007] The OLED device includes a light emission layer of a light emission element from an organic material or a highly polymerized compound. The light emission layer can gradually deteriorate by reacting with peripheral oxygen, moisture, or other environmental factors. As such, the life span of the light emission element can be reduced. Particularly, electrodes, such as a cathode and an anode, of the light emission element can be easily oxidized when they are exposed to oxygen or moisture. Due to this, the characteristics of the light emission element can vary considerably.

[0008] In attempts to overcome the above-mentioned disadvantages and secure stability of the OLED device, a variety of technology research and development are being executed. In order to prevent the intrusion of oxygen and moisture and restrict deterioration, an OLED device encapsulated with a metal cap to which an absorption agent is attached is being used in the display device field up to the present under consideration of the manufacturing process.

[0009] The encapsulation using the metal cap makes it difficult for the OLED device to be lighter weight and thinner. Particularly, the metal cap is impossible to apply to a next generation flexible light-emitting display device.

[0010] In view of this point, alternative methods capable of substituting the encapsulation which uses the metal cap are recently being developed.

BRIEF SUMMARY

[0011] Accordingly, embodiments of the present application are directed to an OLED device that substantially obviates one or more of problems due to the limitations and disadvantages of the related art.

[0012] The embodiments are to provide an OLED device that is adapted to enhance picture quality.

[0013] Additional features and advantages of the embodiments will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the embodiments. The advantages of the embodiments will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0014] According to a first general aspect of the present embodiment, an OLED device includes: a substrate defined into a display area and a non-display area; a light emission diode layer formed on the substrate and configured to emit light; a TFE layer formed on the light emission diode layer and configured to protect the light emission diode layer; an intrusive moisture guide layer configured to prevent moisture intrusion into the light emission diode layer; and a getter configured to absorb moisture which is guided by the intrusive moisture guide layer.

[0015] Other systems, methods, features and advantages will be, or will become, apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the present disclosure, and be protected by the following claims. Nothing in this section should be taken as a limitation on those claims. Further aspects and advantages are discussed below in conjunction with the embodiments. It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are exemplary and explanatory and are intended to provide further explanation of the disclosure as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The accompanying drawings, which are included to provide a further understanding of the embodiments and are incorporated herein and constitute a part of this application, illustrate embodiment(s) of the present disclosure and together with the description serve to explain the disclosure. In the drawings:

[0017] FIG. 1 is a block diagram showing an organic light emitting display device according to an embodiment of the present disclosure;

[0018] FIG. 2 is a planar view showing an OLED device according to a first embodiment of the present disclosure;

[0019] FIG. 3 is a cross-sectional view showing the OLED device taken along a line A-A' in FIG. 2; and

[0020] FIG. 4 is a cross-sectional view showing an organic light emitting display device according to a second embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0021] In the present disclosure, it will be understood that when an element, such as a substrate, a layer, a region, a film, or an electrode, is referred to as being formed "on" or "under" another element in the embodiments, it may be directly on or under the other element, or intervening elements (indirectly) may be present. The term "on" or "under" of an element will be determined based on the drawings.

[0022] Reference will now be made in detail to the present embodiments, examples of which are illustrated in the accompanying drawings. In the drawings, the sizes and thicknesses of elements can be exaggerated, omitted or simplified for clarity and convenience of explanation, but they do not mean the practical sizes of elements.

[0023] FIG. 1 is a block diagram showing an organic light emitting display device according to an embodiment of the present disclosure.

[0024] Referring to FIG. 1, the organic light emitting display device according to an embodiment of the present dis-

closure can include an organic light emitting panel 10, a controller 30, a scan driver 40, a data driver 50 and a power supplier 60.

[0025] The scan driver 40 can apply scan signals S to the organic light emitting panel 10.

[0026] The data driver 50 can apply data voltages Vdata to the organic light emitting panel 10.

[0027] The power supplier 60 can apply a plurality of drive voltages to the controller 30, the scan driver 40 and the data driver 50.

[0028] Although it is not shown in the drawing, the organic light emitting panel 10 can include a plurality of scan lines, a plurality of data lines and a plurality of power lines. The scan lines and the data lines crossing each other can define a plurality of pixel regions. Each pixel region can electrically connected to one of the scan lines, one of the data lines and one of the power lines.

[0029] For example, each scan line can be electrically connected with the plurality of pixel regions arranged in a horizontal direction. Each data line can be electrically connected with the plurality of pixel regions arranged in a vertical direction.

[0030] As such, the scan signal S, the data voltage Vdata and a supply voltage can be applied to each of the pixel regions. In detail, the scan signal S can be applied to the pixel region through one of the scan lines. The data voltage Vdata can be applied to the pixel region through one of the data lines. The supply voltage can be applied to the pixel region through one of the power lines.

[0031] FIG. 2 is a planar view showing an OLED device according to a first embodiment of the disclosure.

[0032] Referring to FIG. 2, the OLED device according to a first embodiment of the present disclosure can include a substrate 1 defined a display area AA, which is used to display an image, and a non-display area NA in which any image is not displayed.

[0033] The display area AA can be formed in the central area of the OLED device. The non-display area NA can be positioned in the peripheral area around the display area AA.

[0034] The OLED device can further include a driver chip 20 and a getter 26 which are formed in the non-display area NA.

[0035] The driver chip 20 can include at least one of the scan driver, the data driver and the controller. Also, the driver chip 20 can apply drive signals to pixel regions (not shown) within the display area through a plurality of lines.

[0036] The getter 26 can be formed in such a manner as to surround edges of the display area AA. In other words, the getter 26 can be formed in such a manner as to separate the display area AA and the non-display area NA from each other by a fixed distance. Consequently, the getter 26 can be formed in the boundary between the display area AA and the non-display area NA.

[0037] FIG. 3 is a cross-sectional view showing the OLED device taken along a line A-A' in FIG. 2.

[0038] Referring to FIG. 3, the OLED device according to a first embodiment of the present disclosure includes a light emission diode layer 11, an intrusive moisture guide layer 24 and a TFE layer 70 which are sequentially stacked on a substrate 1.

[0039] The light emission diode layer 11 can be formed to include a transparent electrode 12, a hole transport layer 14, a light emission layer 16, an electron transport layer 18 and a metal electrode 22 which are sequentially stacked on the

substrate 1. However, the light emission diode layer 11 is not limited to the above-mentioned structure.

[0040] The intrusive moisture guide layer can be formed on the light emission diode layer 11. A getter 26 can be formed on the side surfaces of the intrusive moisture guide layer 24. In detail, the getter 26 can be formed in the non-display area NA around the intrusive moisture guide layer 24. In other words, the getter 26 can be formed in such a manner as to come into contact with the intrusive moisture guide layer 24.

[0041] The intrusive moisture guide layer 24 can be formed from a transparent material and in a plate shape. The intrusive moisture guide layer formed in the plate shape guides intrusive moisture to flow laterally. The getter 26 absorbs the intrusive moisture flowing laterally along the intrusive guide layer 24. In accordance therewith, the moisture intrusion into the light emission diode layer 11 can be prevented.

[0042] The getter 26 can be from a material removing oxygen and moisture. For example, the getter 26 can be formed from one material selected from a material group which includes barium oxide, calcium oxide, magnesium oxide, lithium oxide, sodium oxide, potassium oxide, lithium sulfate, sodium sulfate, calcium sulfate, magnesium sulfate, potassium sulfate, calcium chlorate, magnesium chloride, calcium bromide, cesium bromide, vanadium bromide and calcium nitride.

[0043] In this manner, moisture passing through the TFE layer 70 can be dispersed laterally along the intrusive moisture guide layer within the display area AA and absorbed by the getter within the non-display area NA. As such, the moisture intrusion into the light emission diode layer 11 within the display area AA can be prevented. In accordance therewith, a stained image and a pixel defect can be prevented. As a result, picture quality can be enhanced.

[0044] The TFE layer 70 can be formed in a stacked layer structure of organic and inorganic films. For example, the TFE layer 70 can include a first organic film 71, a first inorganic film 72, a second organic film 74, a second inorganic film 76 and a third organic film 78 which are sequentially stacked.

[0045] The first through third organic films 71, 74 and 78 can be formed from at least one material selected from a material group which includes an olefin based polyethylene, polypropylene, an amide based material, polystyrene, polyethylene terephthalate, polybutyl terephthalate, polyvinylidene chloride, polycarbonate, cellulose acetate, and poly(meth)acrylate. The olefin based polyethylene can include low density polyethylene, very low density polyethylene (VLDPE) and high density polyethylene. The amide based material can include nylon6, nylon 66, nylon 6/9, nylon 6/10, nylon 6/12, nylon 11 and nylon 12. In other words, each of the first through third organic films 71, 74 and 78 can be formed to include at least one material selected from the above-mentioned material group under consideration of thermal and mechanical characteristics.

[0046] The first and second inorganic films 72 and 76 can be formed from an alloy which includes at least one of aluminum Al, tin Sn, and zinc Zn.

[0047] Although it is not shown in the drawings, the TFE layer can further include adhesive layers used to adhere the organic and inorganic films to each other. Each of the adhesive layers can be formed from one of an epoxy based resin and an acrylate based resin.

[0048] The organic films 71, 74 and 78 are used to protect the light emission diode layer 11 from external impacts. The

inorganic films **72** and **76** have the function of protecting the light emission diode layer **11** from external oxygen and moisture.

[0049] Although the intrusion of oxygen and moisture is prevented by the inorganic films **72** and **76**, moisture can flow toward the light emission diode layer along gaps in the inorganic films **72** and **76**.

[0050] However, moisture intruded through the gaps of the inorganic films **72** and **76** is dispersed laterally along the intrusive moisture guide layer **24** and then absorbed by the getter **26**. As such, the moisture intrusion into the light emission diode layer **11** can be prevented. In accordance therewith, picture quality can be enhanced.

[0051] The intrusive moisture guide layer **24** can be formed from a material with a refractive index between those of the light emission diode layer **11** and the TFE layer **70**. The intrusive moisture guide layer **24** having the refractive index between those of the light emission diode layer **11** and the TFE layer **70** can prevent light loss.

[0052] FIG. 4 is a cross-sectional view showing an OLED device according to a second embodiment of the present disclosure.

[0053] The OLED device of the second embodiment has the same configuration as that of the first embodiment except that the intrusive moisture guide layer and the getter are positioned within the TFE layer. As such, the description of the first embodiment to be repeated in the second embodiment of the present disclosure will be omitted.

[0054] Referring to FIG. 4, the OLED device according to a second embodiment of the present disclosure includes a light emission diode layer **111** formed on a substrate **101**, and a TFE layer **170** formed on the light emission diode layer **111**.

[0055] The light emission diode layer **111** can be formed to include a transparent electrode **112**, a hole transport layer **114**, a light emission layer **116**, an electron transport layer **118** and a metal electrode **122** which are sequentially stacked on the substrate **101**. However, the light emission diode layer **111** is not limited to the above-mentioned structure.

[0056] The TFE layer **170** can be formed in a stacked layer structure of organic and inorganic films. For example, the TFE layer **170** can include a first organic film **171**, a first inorganic film **172**, a second organic film **174**, a second inorganic film **176** and a third organic film **178** which are sequentially stacked.

[0057] The OLED device can further include an intrusive moisture guide layer **124** and a getter **126** which are formed between the second organic film **174** and the second inorganic film **176**.

[0058] The getter **126** can be formed along the side surfaces of the intrusive moisture guide layer **124**. In detail, the getter **126** can be formed in the non-display area NA around the intrusive moisture guide layer **124**. In other words, the getter **126** can be formed in such a manner as to come into contact with the intrusive moisture guide layer **124**.

[0059] The intrusive moisture guide layer **124** can be formed from a transparent material and in a plate shape. The intrusive moisture guide layer **124** formed in the plate shape guides intrusive moisture to flow laterally. The getter **126** absorbs the intrusive moisture flowing laterally along the intrusive guide layer **124**. In accordance therewith, the moisture intrusion into the light emission diode layer **111** can be prevented.

[0060] In this manner, moisture passing through the TFE layer **170** can be dispersed laterally along the intrusive mois-

ture guide layer **124** within the display area AA and absorbed by the getter **126** within the non-display area NA. As such, the moisture intrusion into the light emission diode layer **111** within the display area AA can be prevented. In accordance therewith, a stained image and a pixel defect can be prevented. As a result, picture quality can be enhanced.

[0061] Although the intrusive moisture guide layer **124** and the getter **126** are formed between the second organic and inorganic films **174** and **176**, but the second embodiment is not limited to this. In other words, the intrusive moisture guide layer **124** and the getter **126** can be formed on any one of the organic and inorganic films.

[0062] As described above, the OLED devices of the present embodiments provide the intrusive moisture guide layer and the getter and prevent the moisture intrusion into the light emission diode layer. As such, a stained image and a pixel defect can be prevented. Therefore, the OLED devices can enhance picture quality.

[0063] It should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. In other words, although embodiments have been described with reference to a number of illustrative embodiments thereof, this disclosure is not limited to those. Accordingly, the scope of the present disclosure shall be determined only by the appended claims and their equivalents. In addition, variations and modifications in the component parts and/or arrangements, alternative uses must be regarded as included in the appended claims.

What is claimed is:

1. An organic light emitting display device comprising:
 - a substrate defined into a display area and a non-display area;
 - a light emission diode layer formed on the substrate and configured to emit light;
 - a TFE layer formed on the light emission diode layer and configured to protect the light emission diode layer;
 - an intrusive moisture guide layer configured to prevent moisture intrusion into the light emission diode layer; and
 - a getter configured to absorb moisture which is guided by the intrusive moisture guide layer.
2. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer and the getter are formed in the same layer.
3. The organic light emitting display device of claim 1, wherein the getter is formed in such a manner as to come in contact with the intrusive moisture guide layer.
4. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer is formed in the display area.
5. The organic light emitting display device of claim 1, wherein the getter is formed in the non-display area.
6. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer and the getter are formed between the light emission diode layer and the TFE layer.
7. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer and the getter are formed in a middle portion of the TFE layer.
8. The organic light emitting display device of claim 1, wherein the light emission diode layer includes a transparent electrode, a hole transport layer, an light emission layer, an electron transport layer and a metal electrode.

9. The organic light emitting display device of claim 1, wherein the TFE layer includes a stacked layer structure of at least one organic film and at least one inorganic film.

10. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer is formed in a plate shape.

11. The organic light emitting display device of claim 1, wherein the intrusive moisture guide layer has a refractive index between those of the light emission diode layer and the TFE layer.

12. The organic light emitting display device of claim 9, wherein the intrusive moisture guide layer and the getter are formed on the inorganic film.

* * * * *

专利名称(译)	有机发光显示装置		
公开(公告)号	US20130126837A1	公开(公告)日	2013-05-23
申请号	US13/681645	申请日	2012-11-20
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD. ,		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM JONG SUNG KIM HO JIN		
发明人	KIM, JONG SUNG KIM, HO JIN		
IPC分类号	H01L51/50 H01L51/00		
CPC分类号	H01L51/5256 H01L51/5259 H01L51/50 H01L51/0032		
优先权	1020110121860 2011-11-21 KR		
其他公开文献	US9054327		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种有机发光显示装置，包括：限定在显示区域和非显示区域中的基板；发光二极管层，形成在基板上并配置为发光；TFE层，形成在发光二极管层上，用于保护发光二极管层；侵入湿气引导层，用于防止水分侵入发光二极管层；吸气剂，其构造成吸收由侵入湿气引导层引导的水分。

