




US 20160242780A1

(19) **United States**(12) **Patent Application Publication**
Shelton, IV et al.(10) **Pub. No.: US 2016/0242780 A1**(43) **Pub. Date: Aug. 25, 2016**(54) **ROBOTICALLY-DRIVEN SURGICAL
INSTRUMENT WITH E-BEAM DRIVER**continuation of application No. 13/118,246, filed on
May 27, 2011, now Pat. No. 9,060,770.(71) Applicant: **Ethicon Endo-Surgery, LLC,**
Guaynabo, PR (US)**Publication Classification**(72) Inventors: **Frederick E. Shelton, IV,** Hillsboro,
OH (US); **Michael E. Setser,**
Burlington, KY (US); **William B.**
Weisenburgh, II, Maineville, OH (US)(51) **Int. Cl.****A61B 17/10** (2006.01)**A61B 17/068** (2006.01)(52) **U.S. Cl.**CPC **A61B 17/105** (2013.01); **A61B 17/068**
(2013.01); **A61B 2034/302** (2016.02)(21) Appl. No.: **15/141,439**(22) Filed: **Apr. 28, 2016**

(57)

ABSTRACT

A surgical severing and stapling instrument, suitable for laparoscopic and endoscopic clinical procedures, clamps tissue within an end effector of an elongate channel pivotally opposed by an anvil. Various embodiments are configured to be operably attached to a robotic system to receive actuation/control motions therefrom.

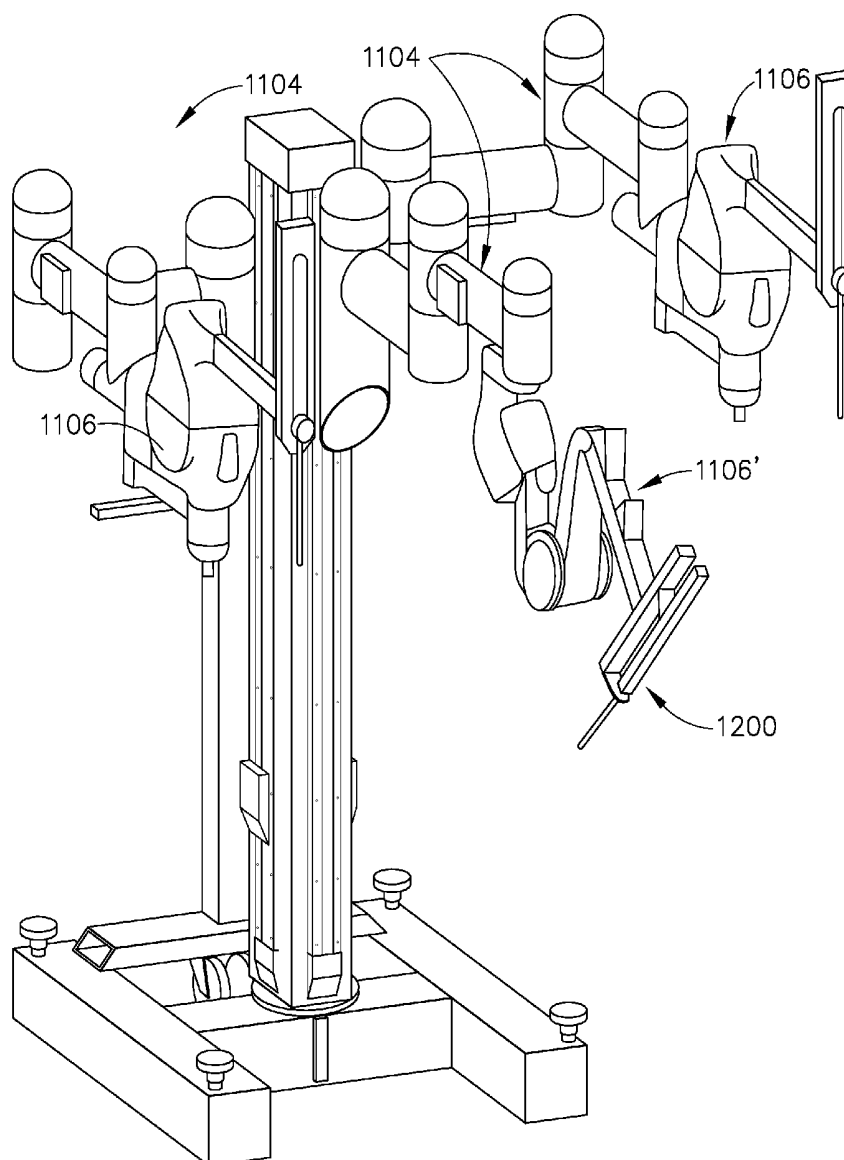Related U.S. Application Data(63) Continuation of application No. 14/867,362, filed on
Sep. 28, 2015, which is a continuation of application
No. 14/745,858, filed on Jun. 22, 2015, which is a

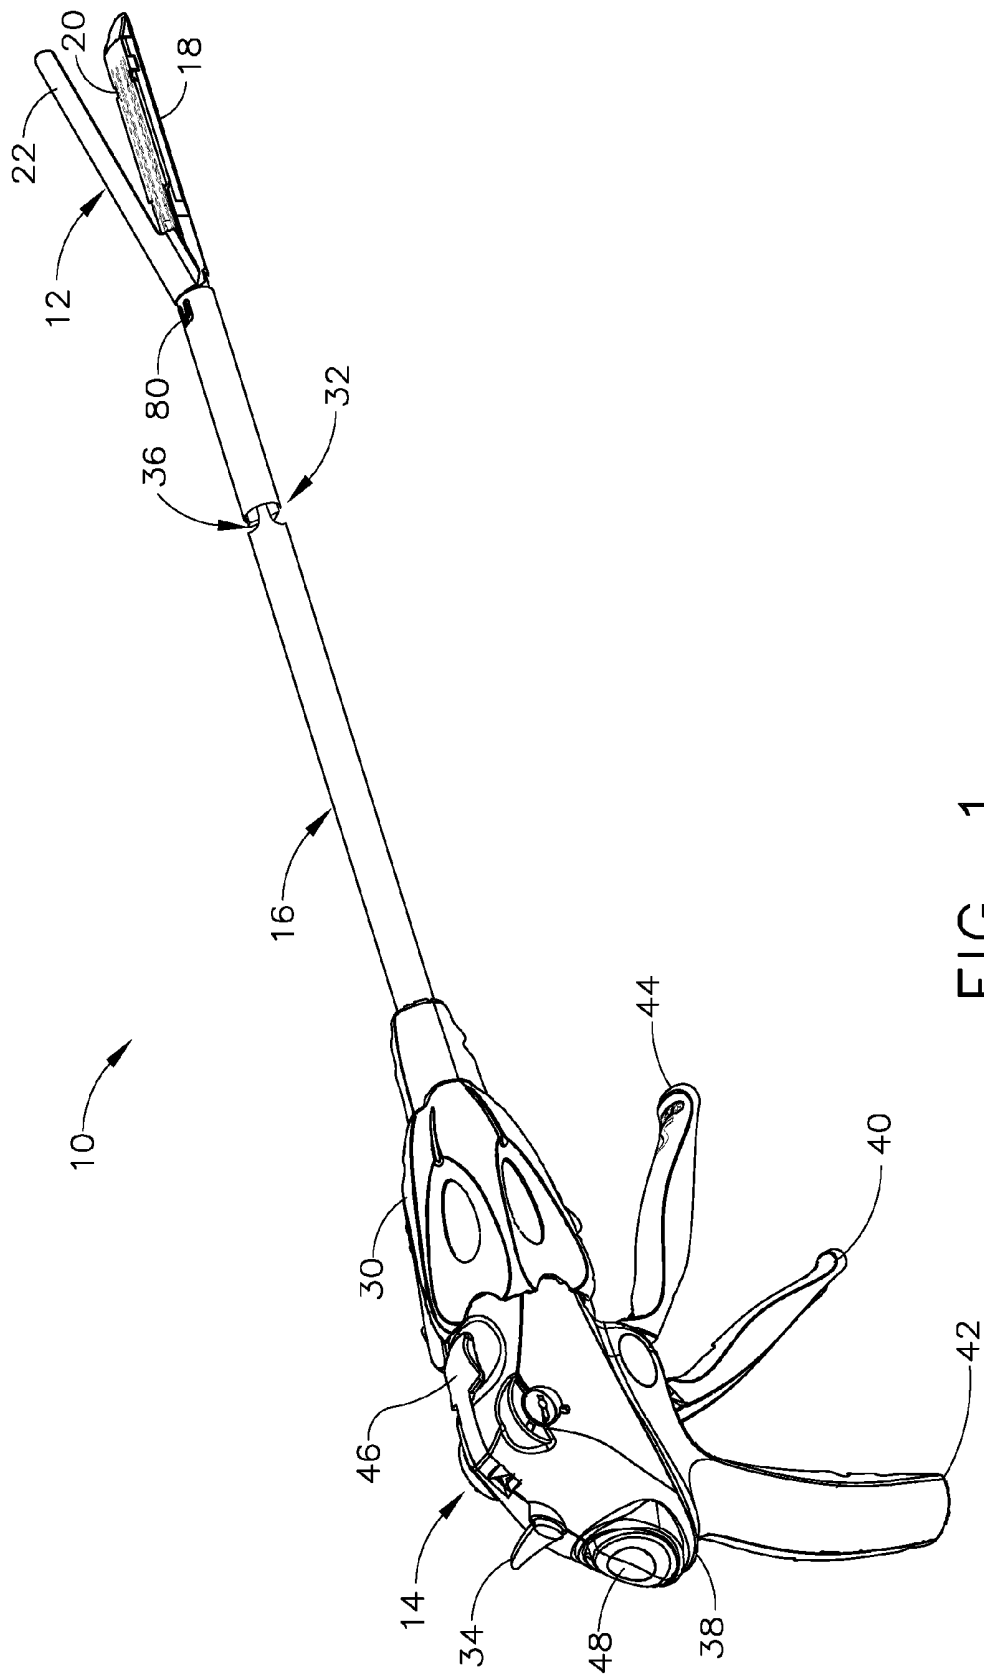


FIG. 1

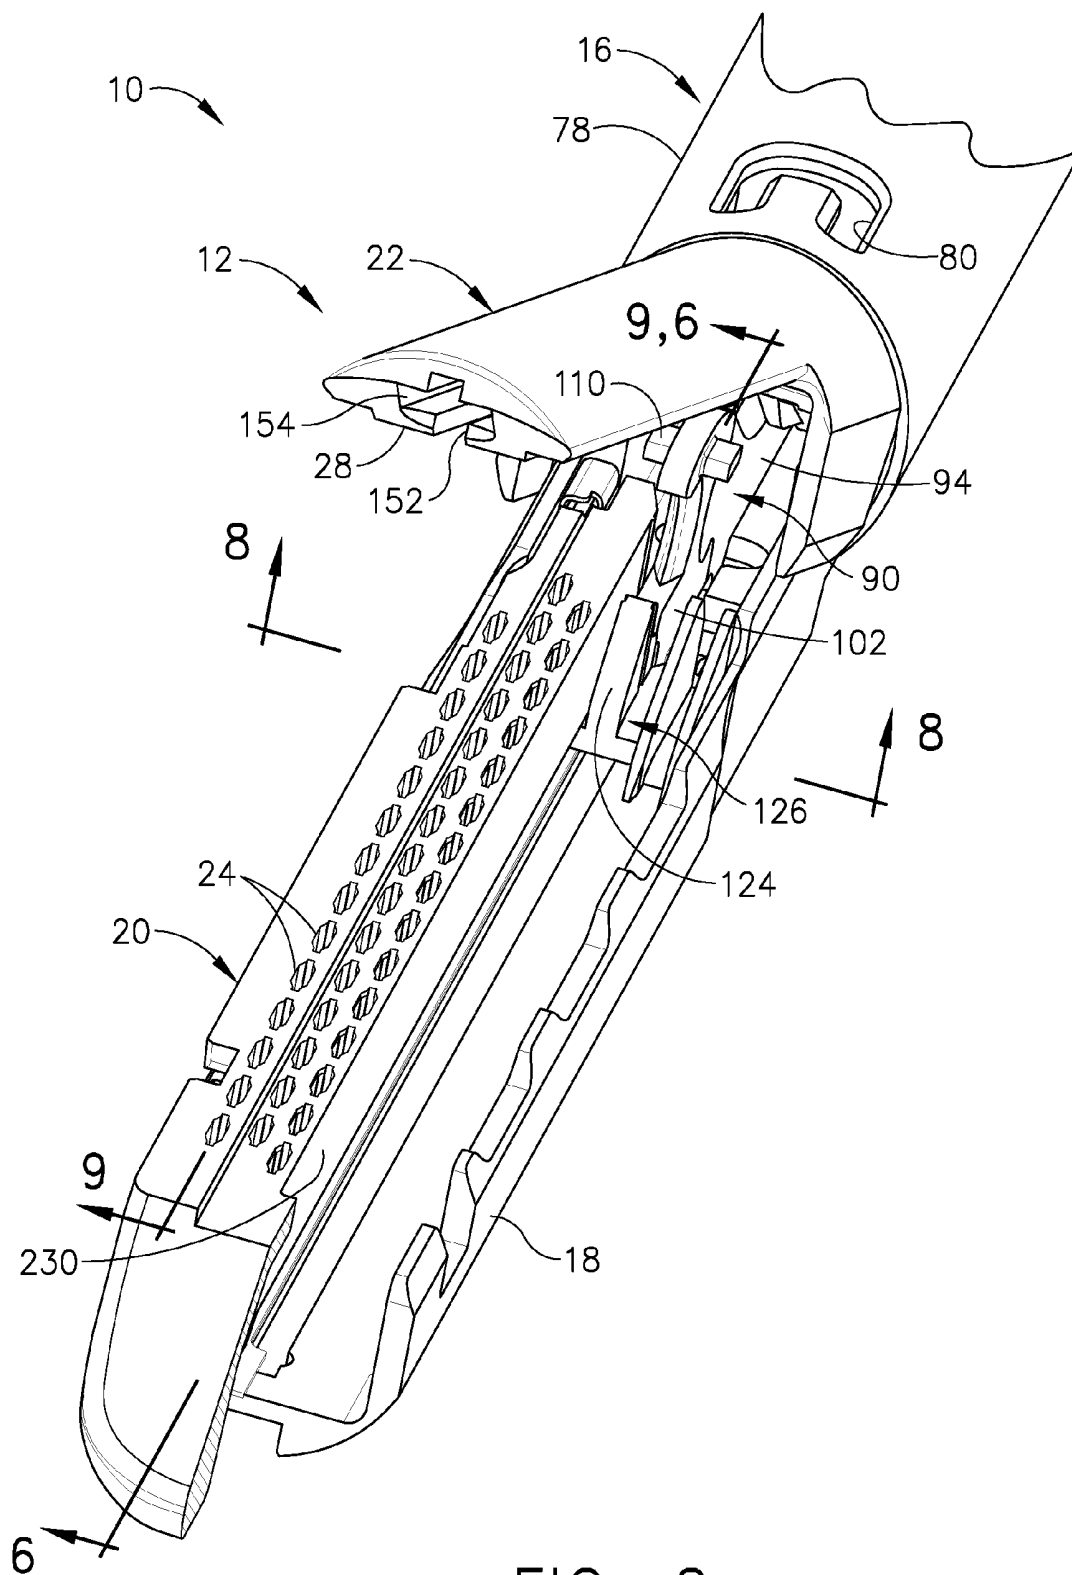
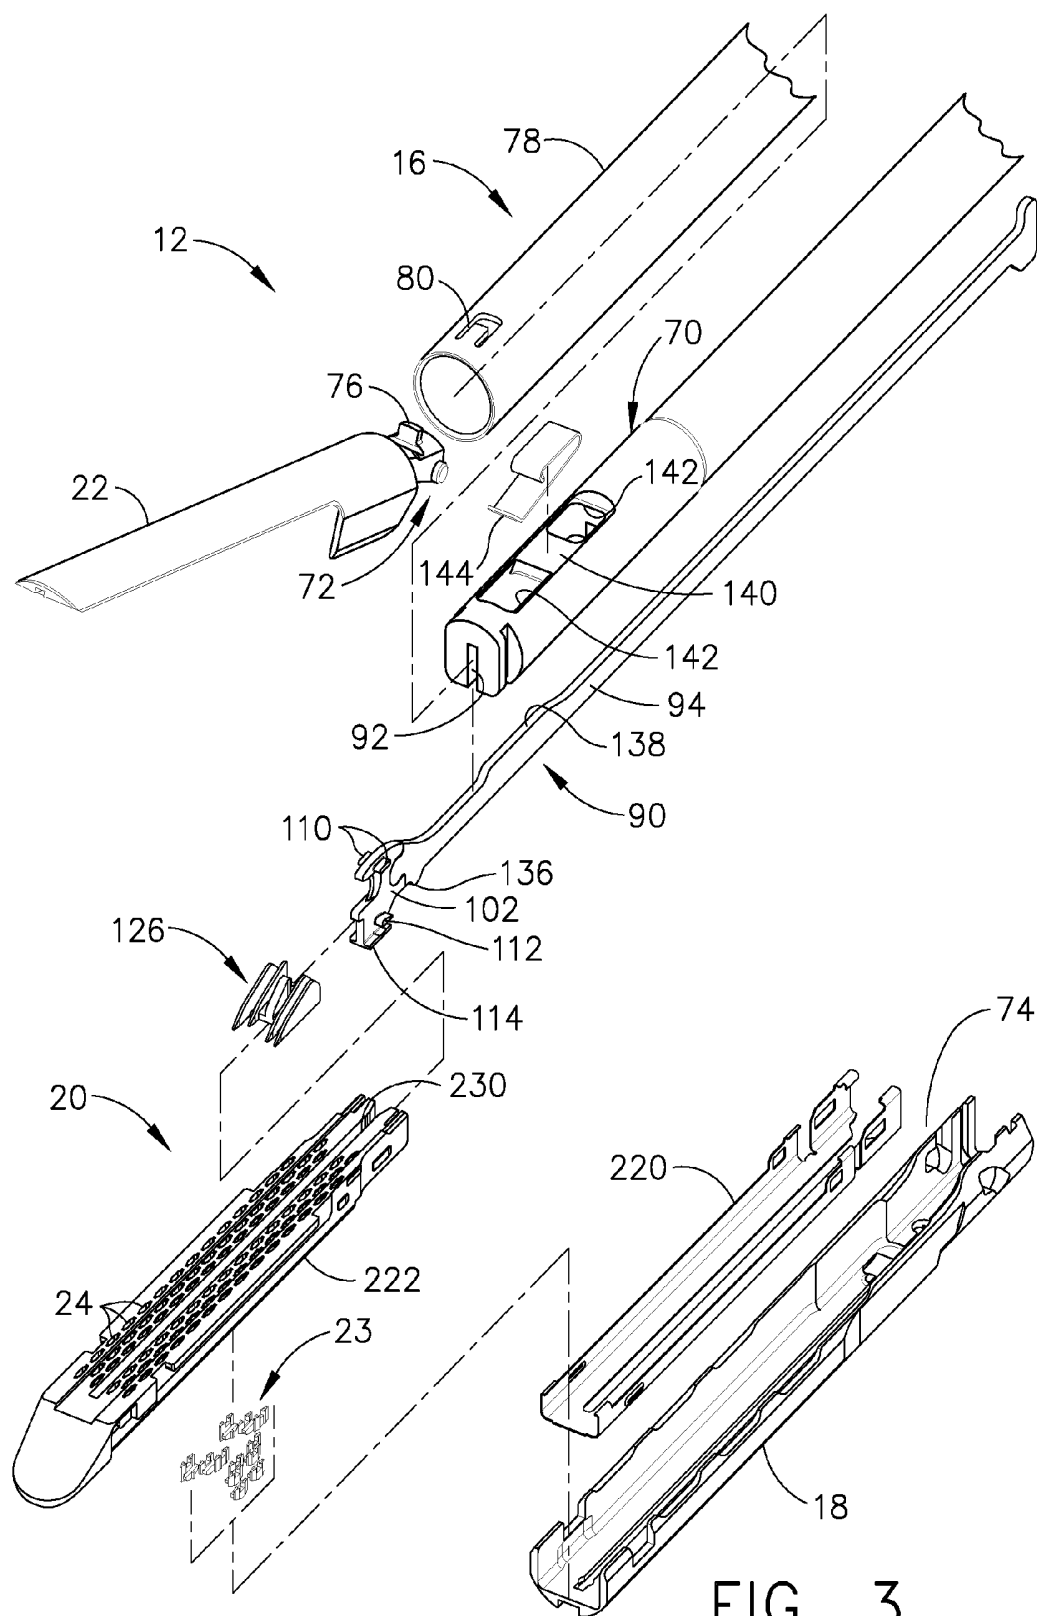
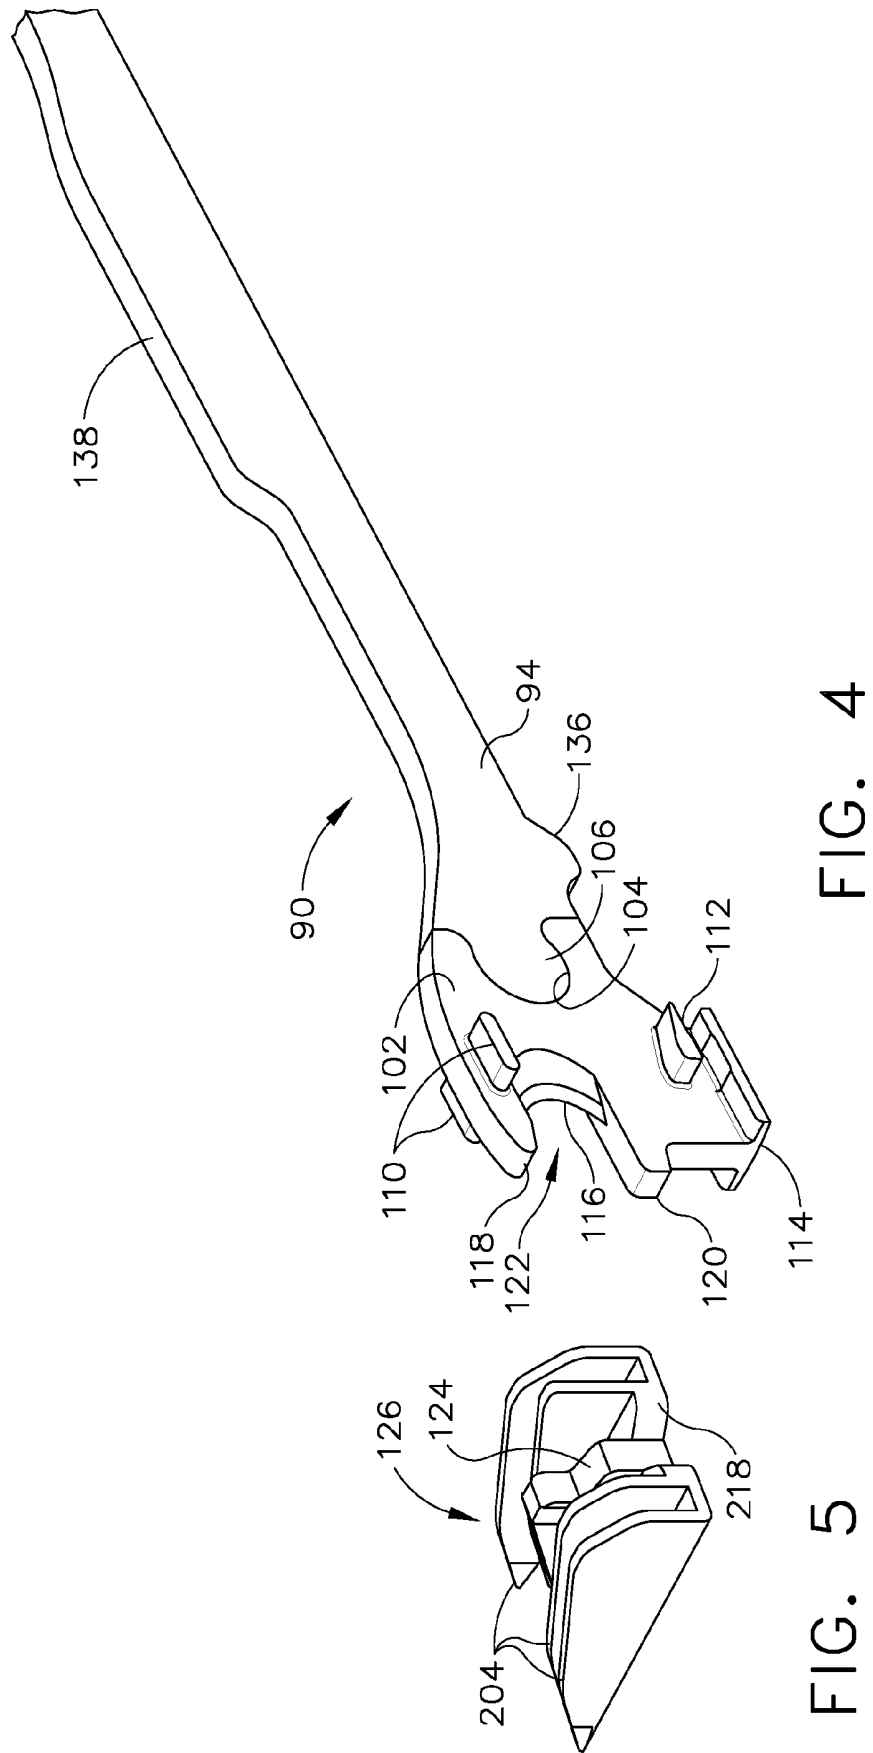


FIG. 2





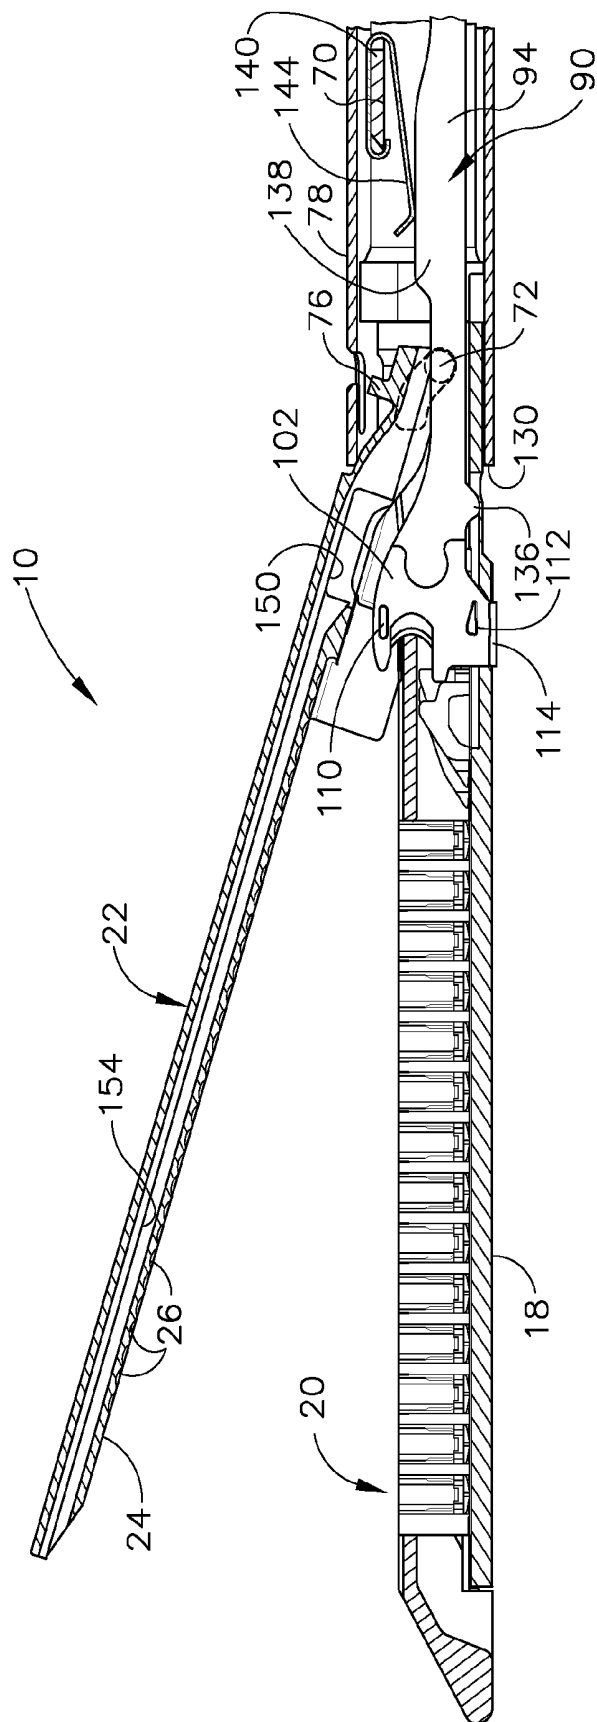


FIG. 6

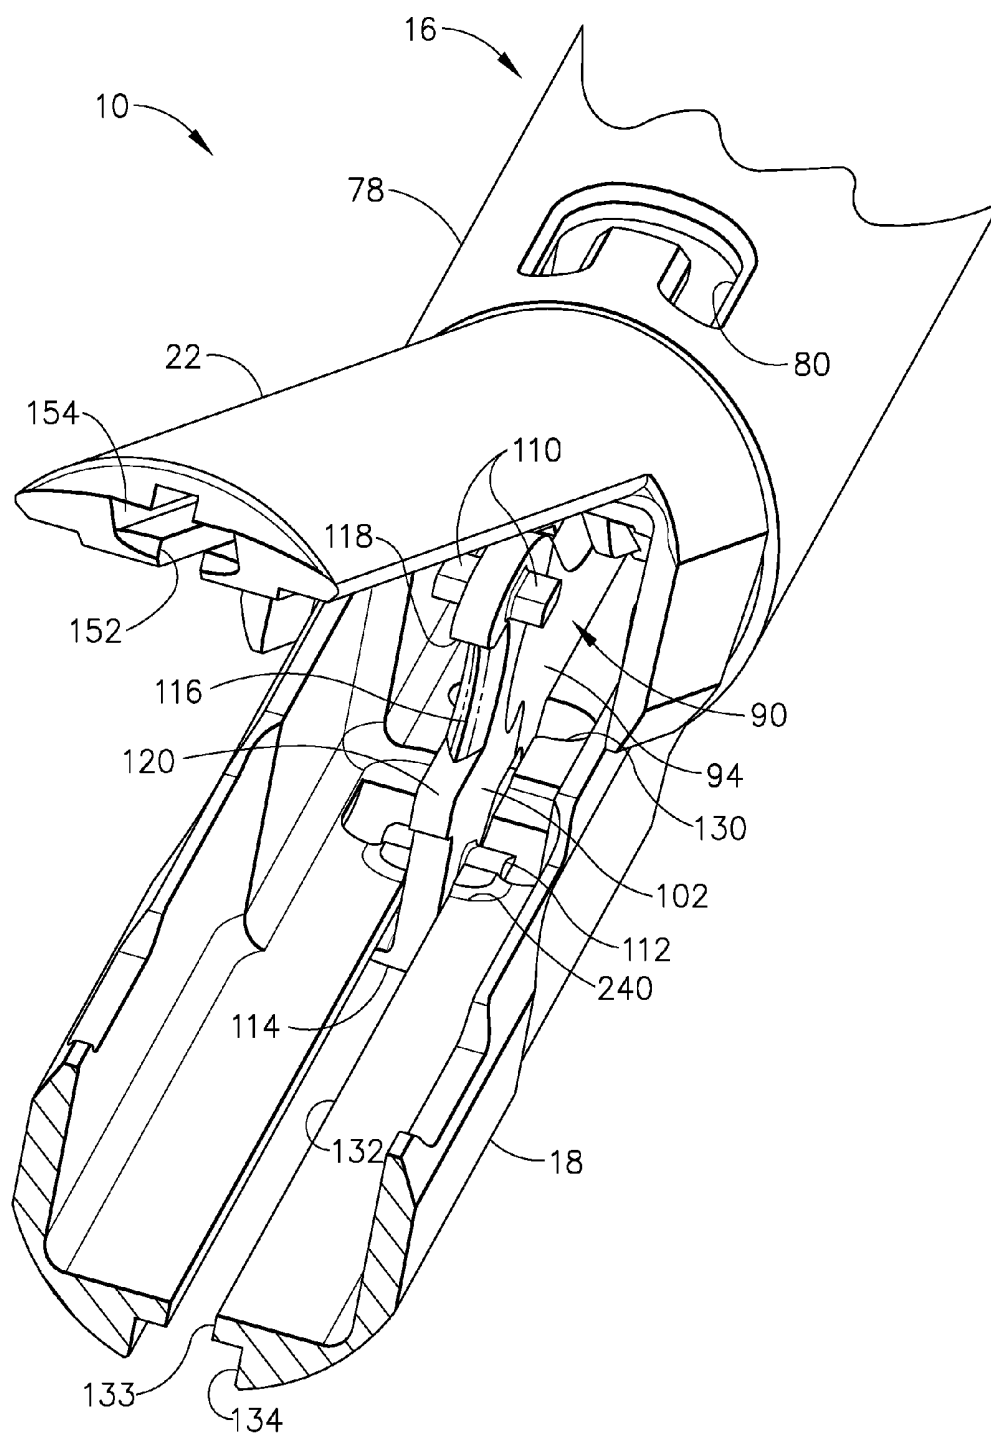


FIG. 7

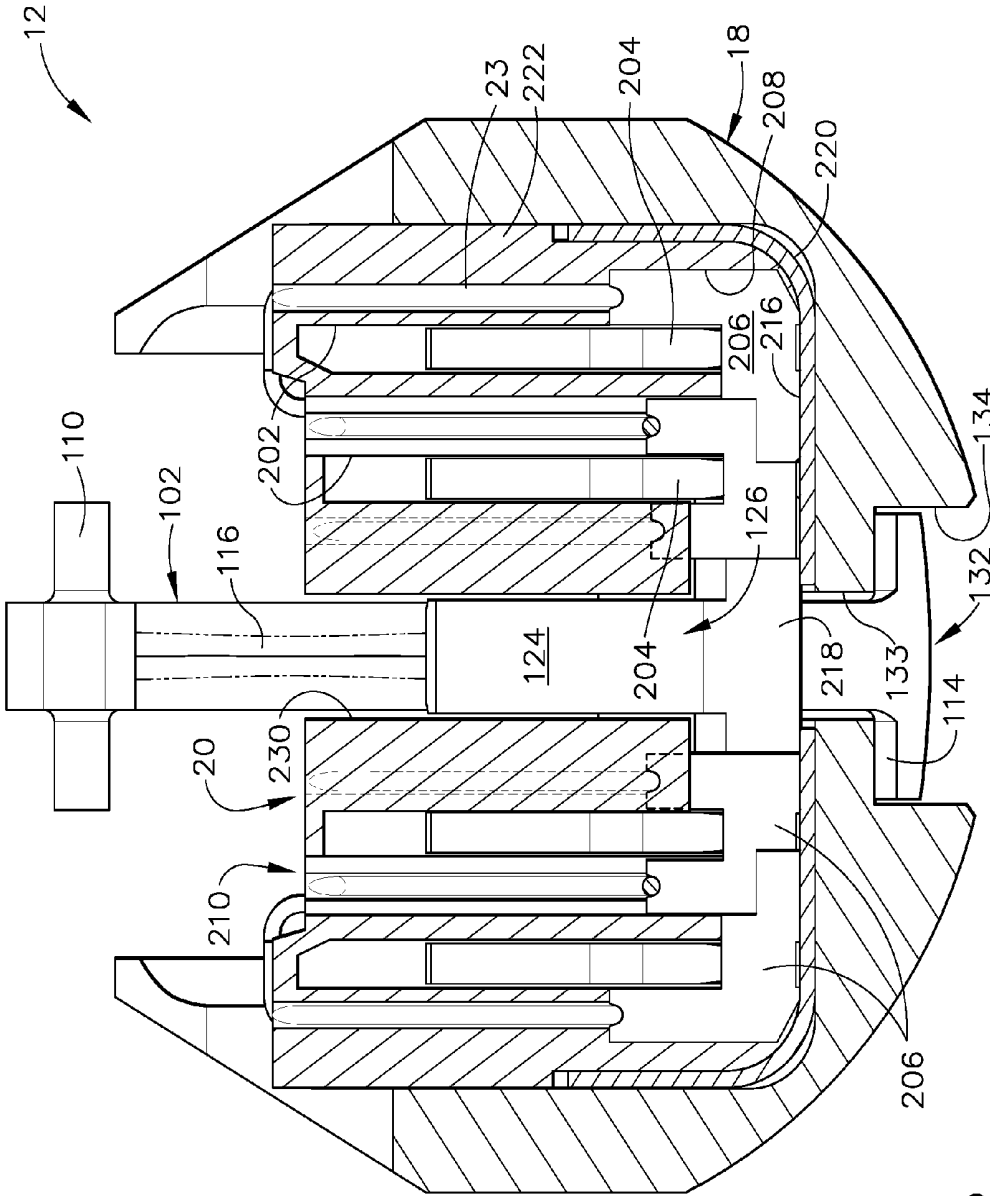


FIG. 8

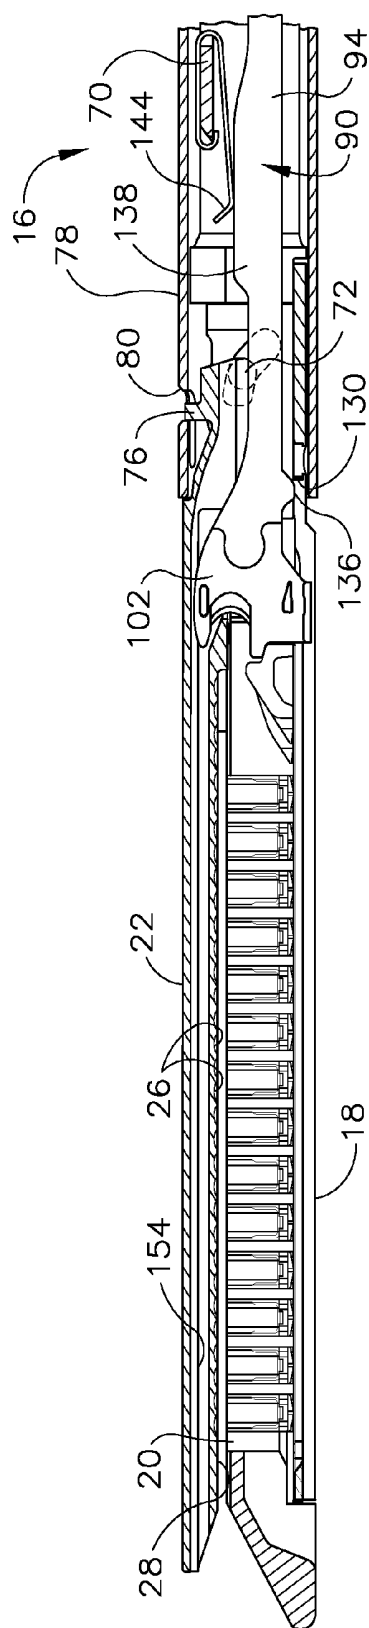


Fig. 9

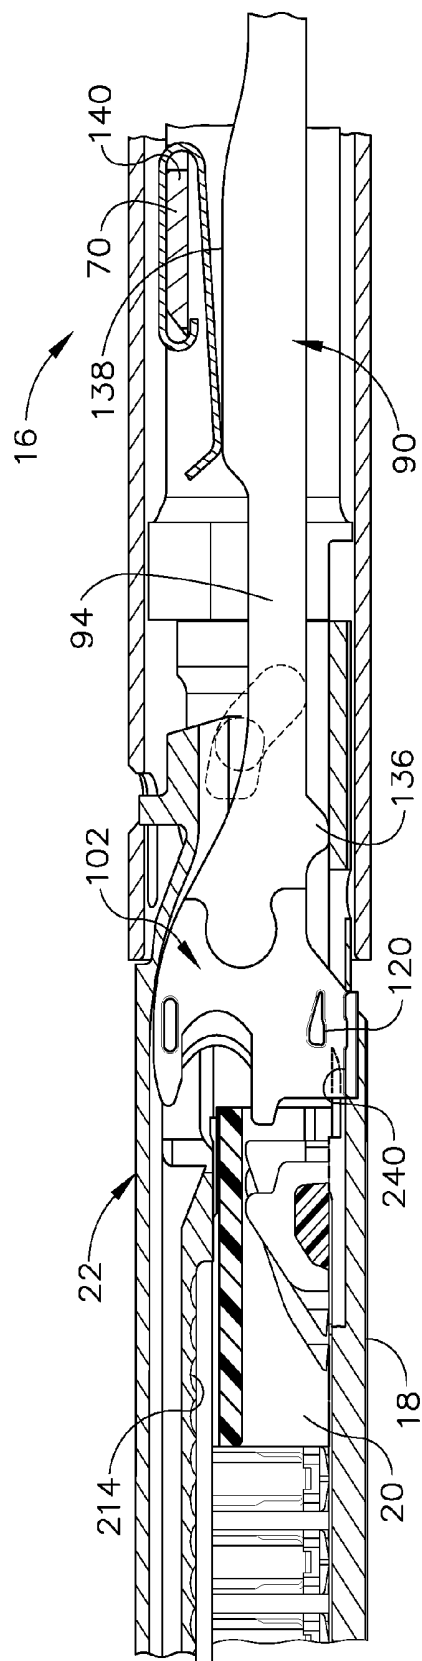


FIG. 10

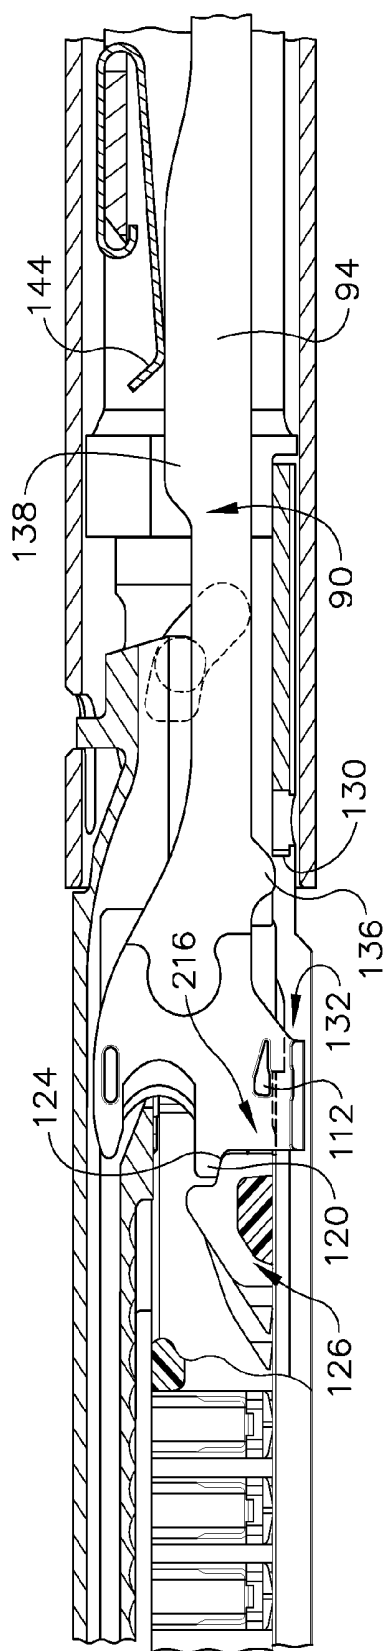


FIG. 11

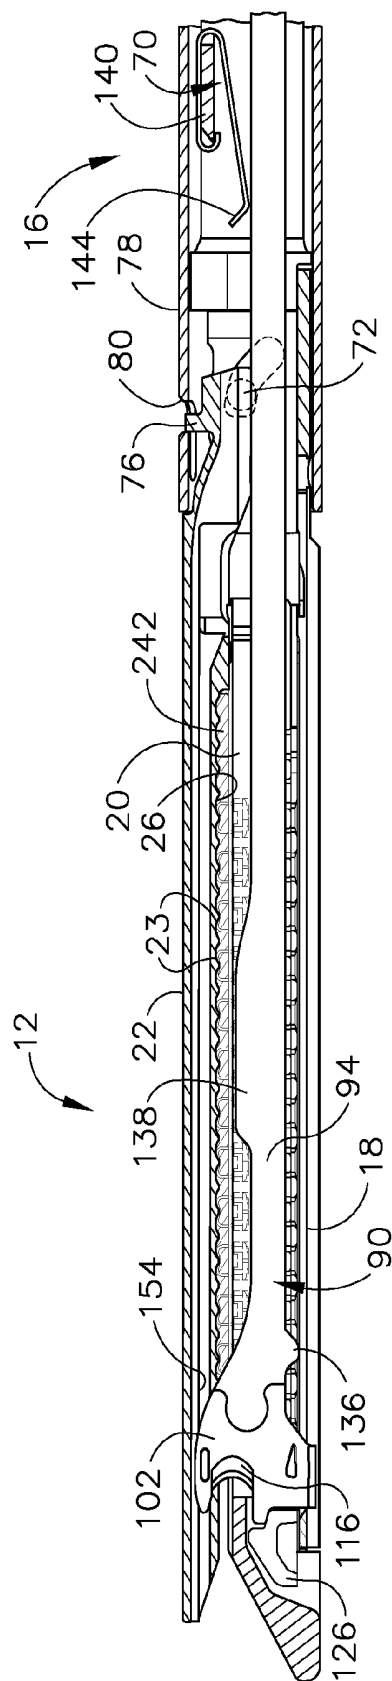
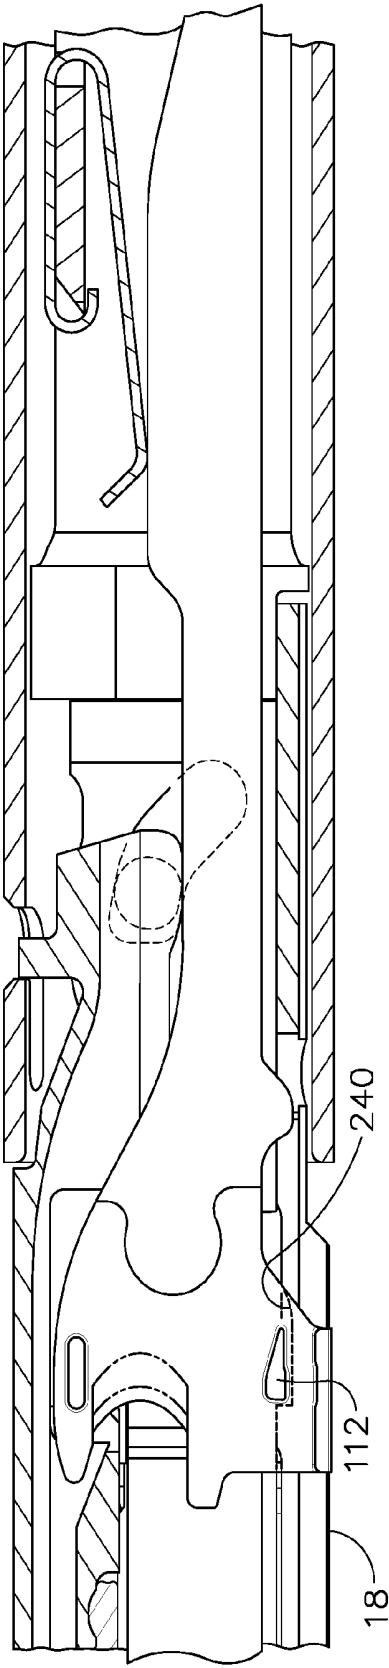
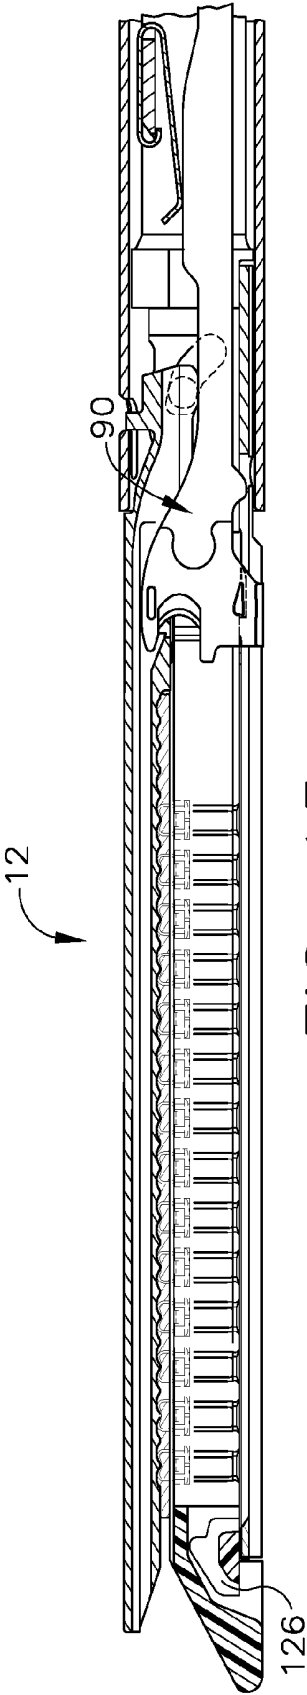


FIG. 12



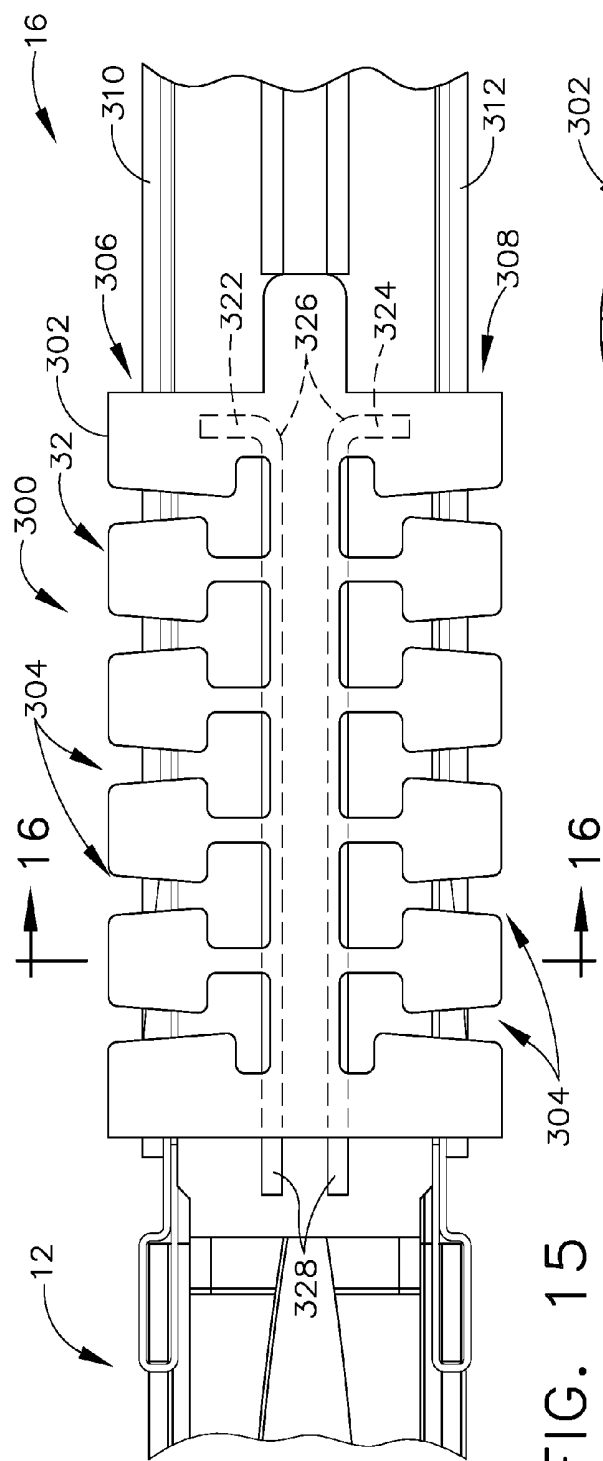


FIG. 15

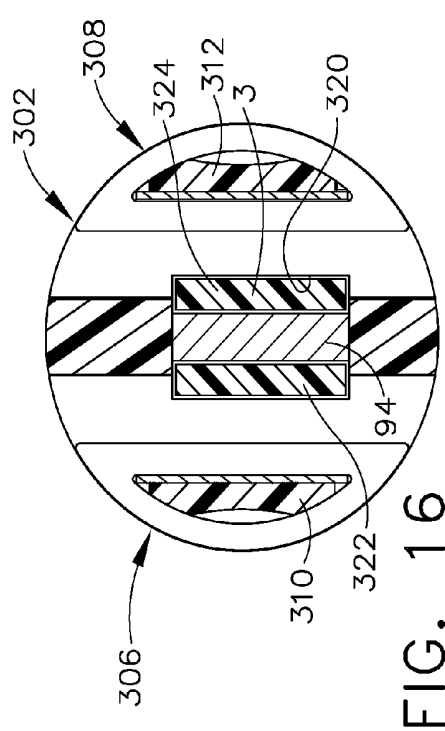


FIG. 16

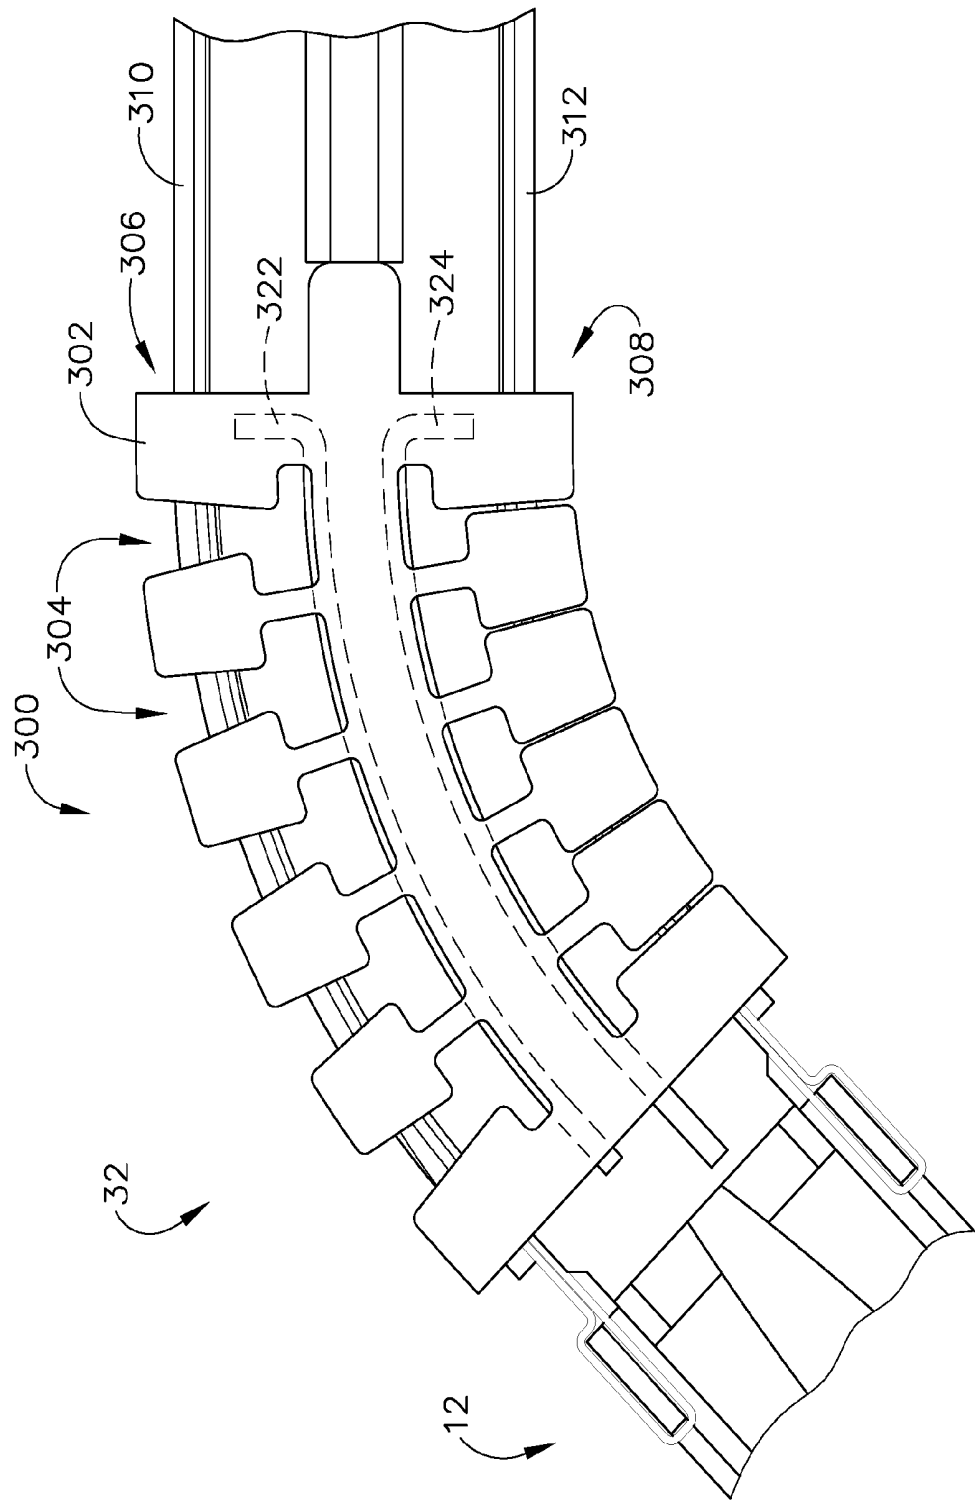


FIG. 17

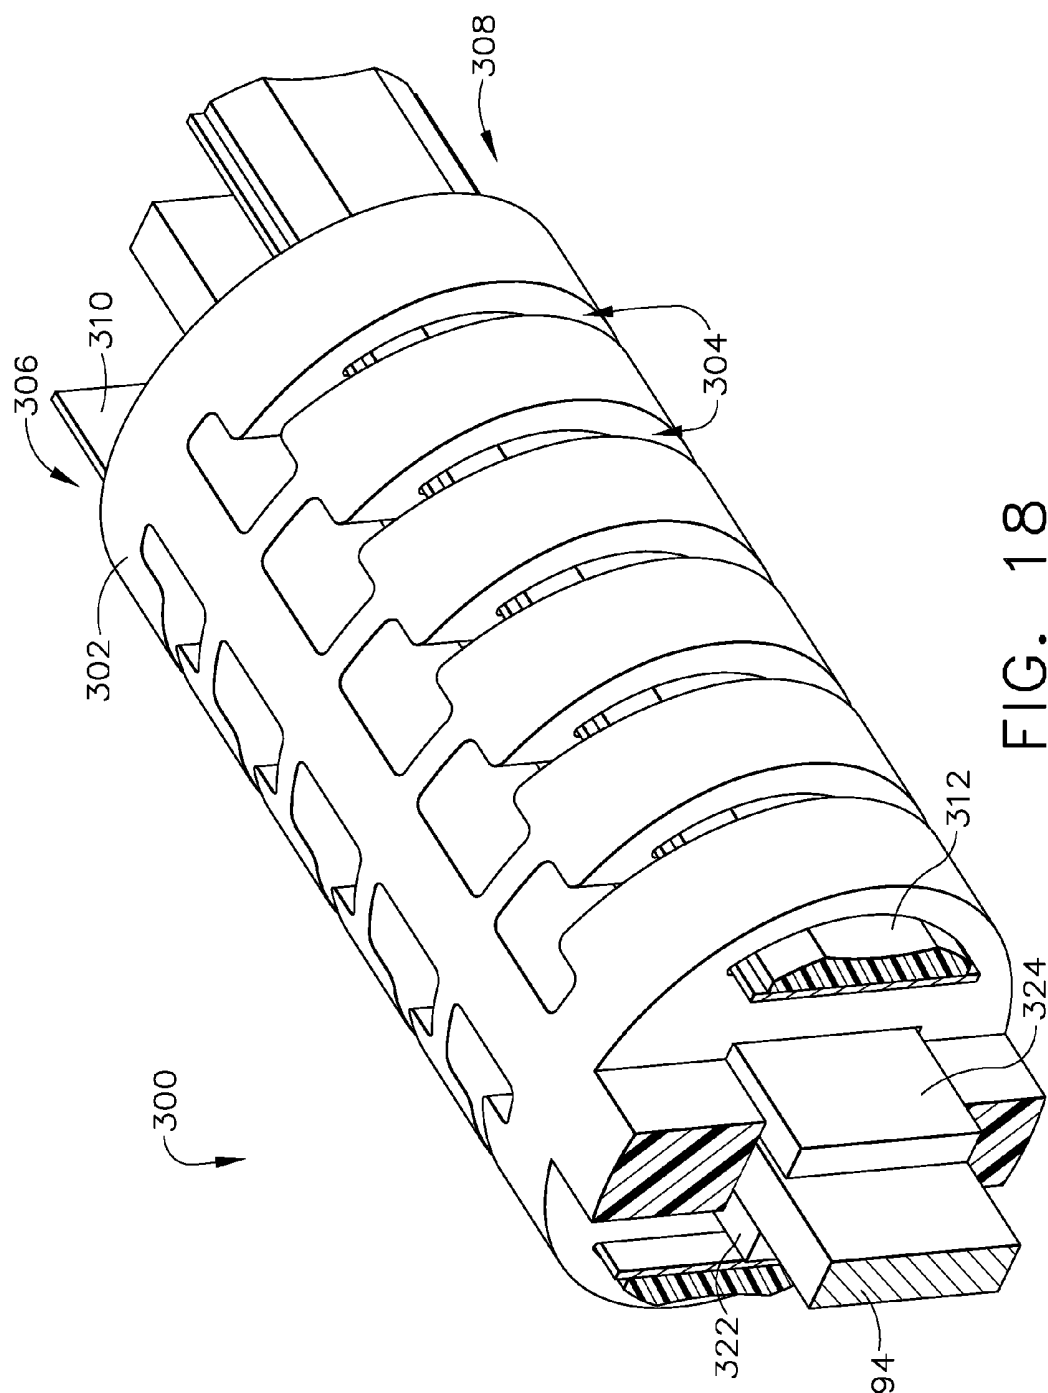


FIG. 18

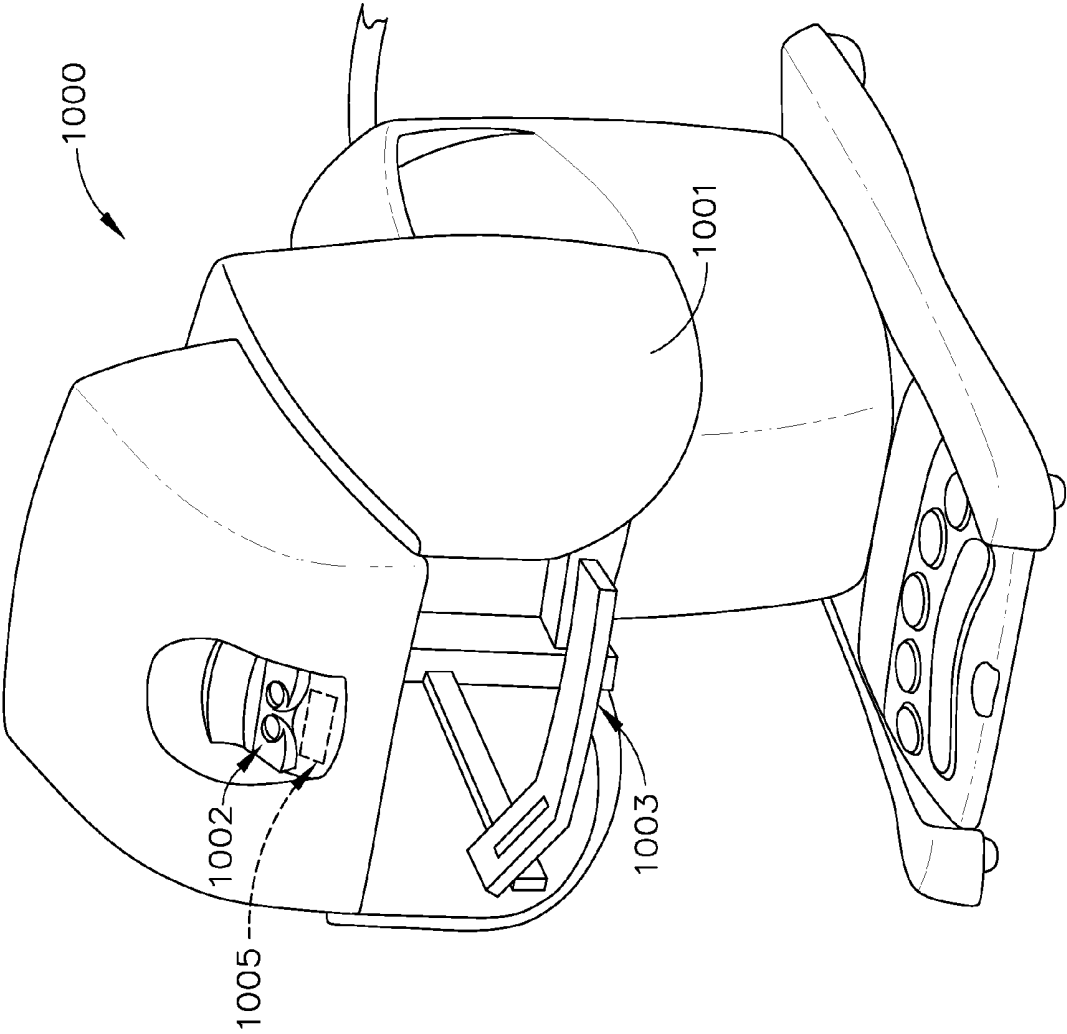


FIG. 19

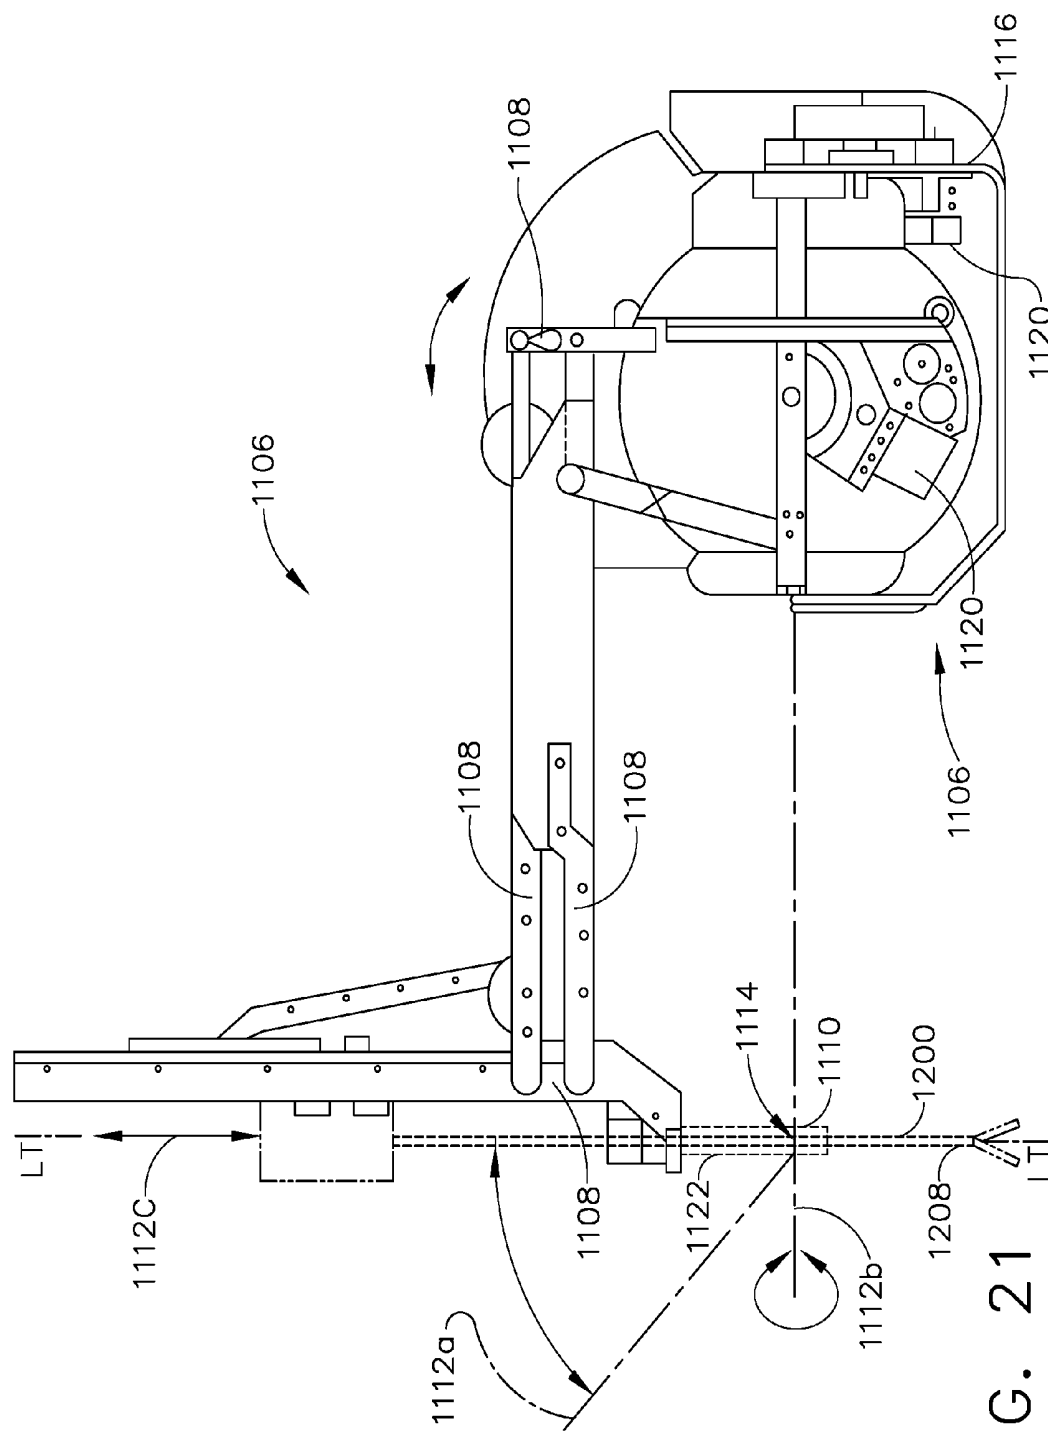


FIG. 21

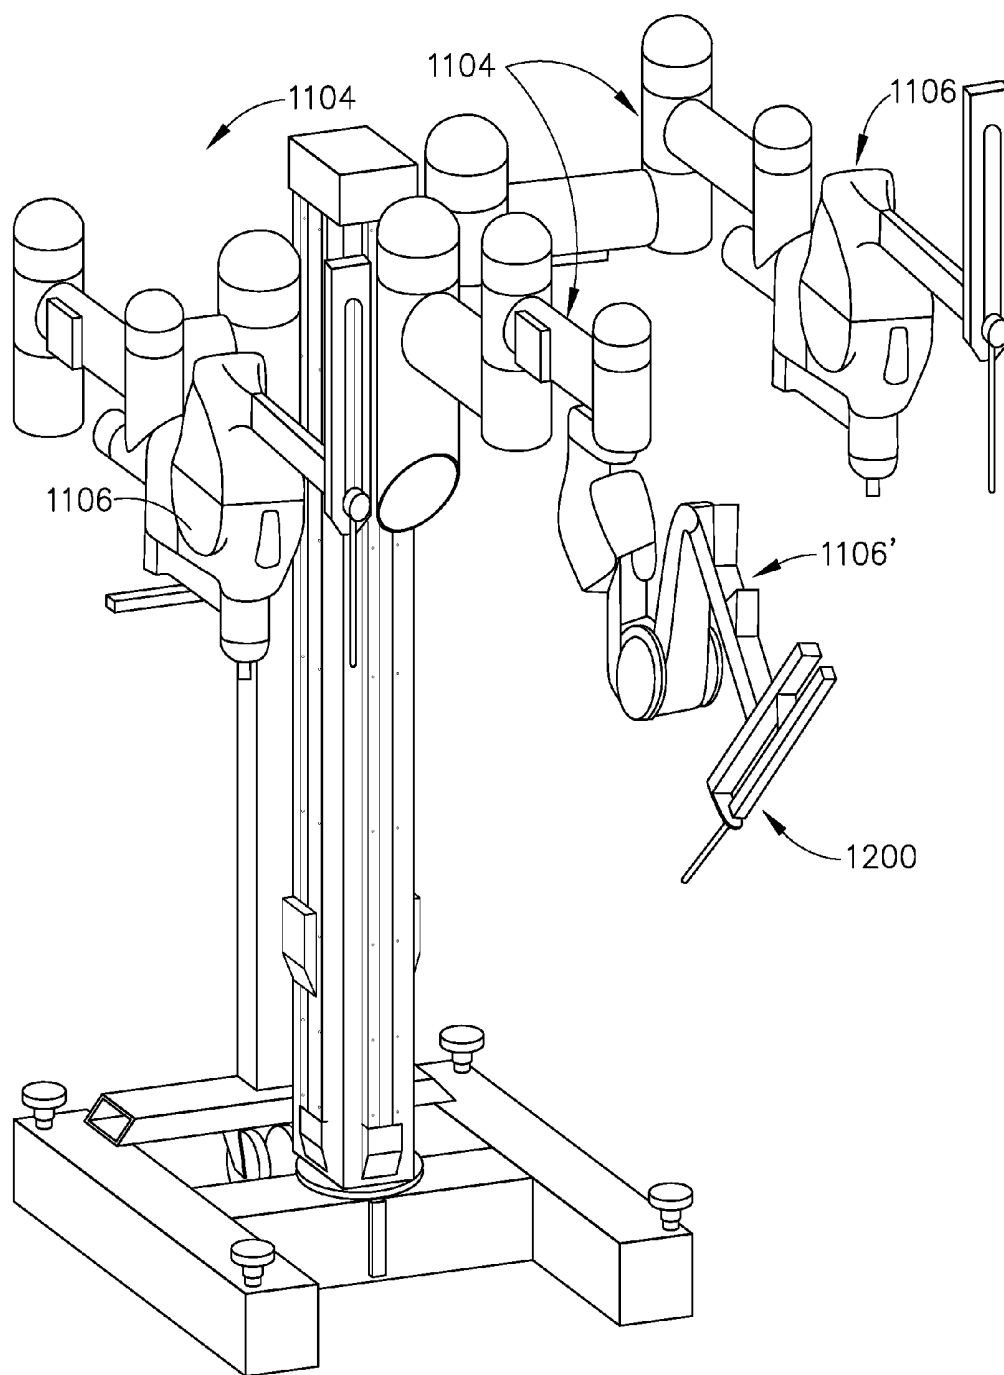


FIG. 22

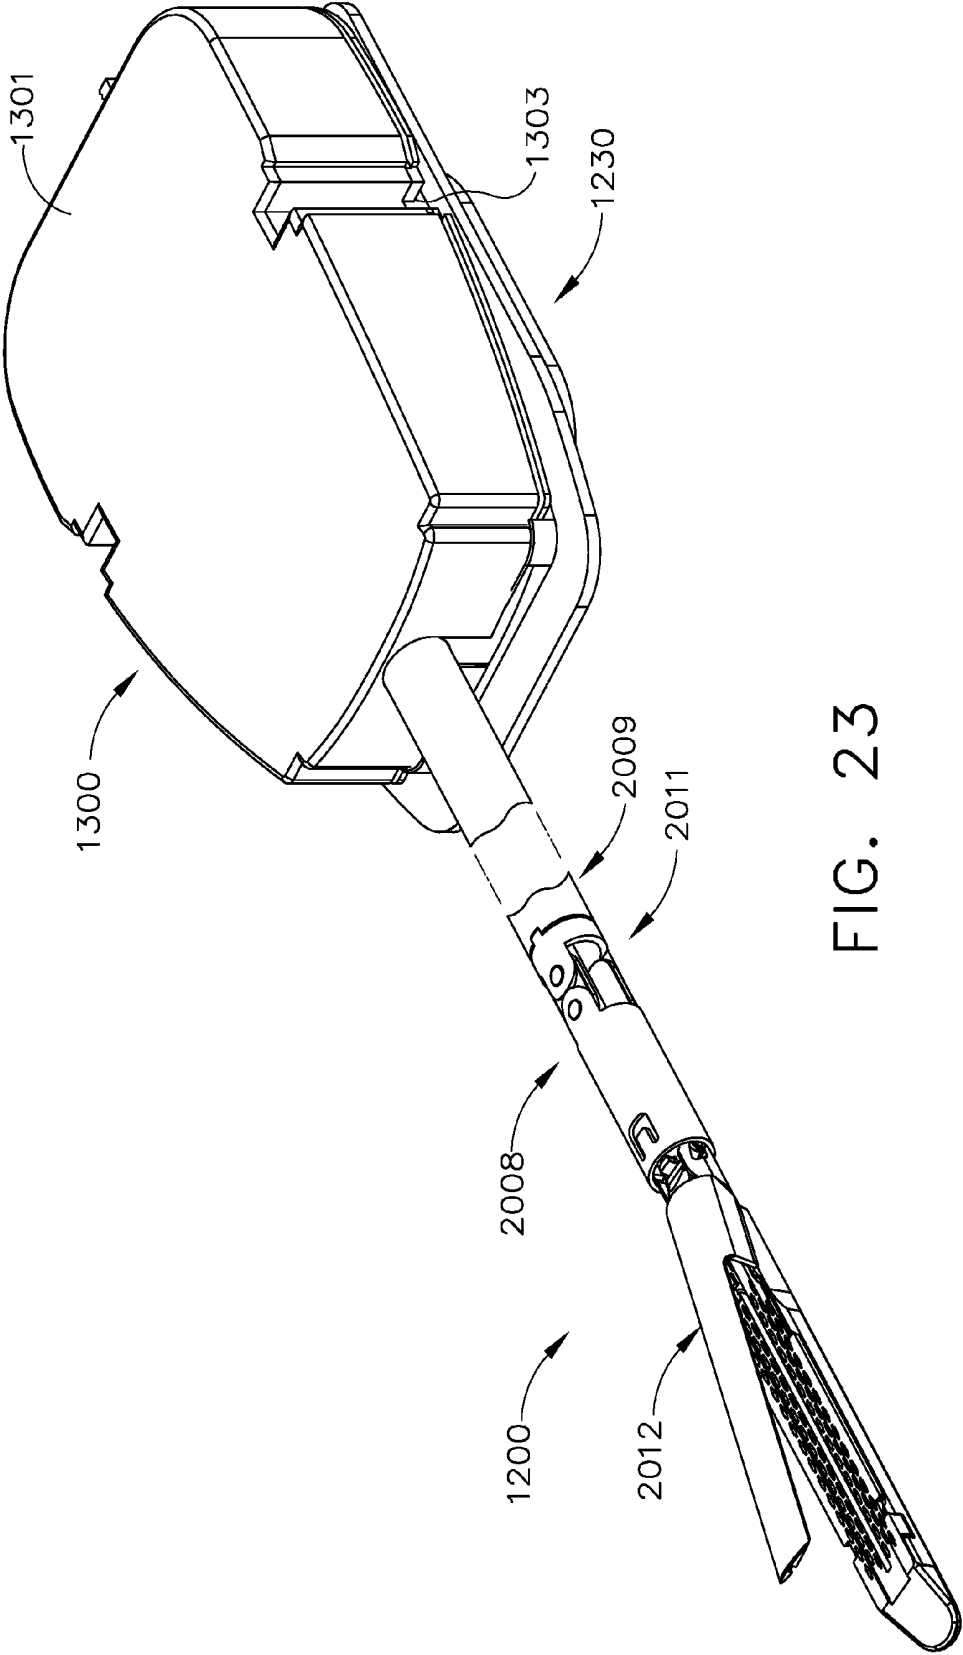


FIG. 23

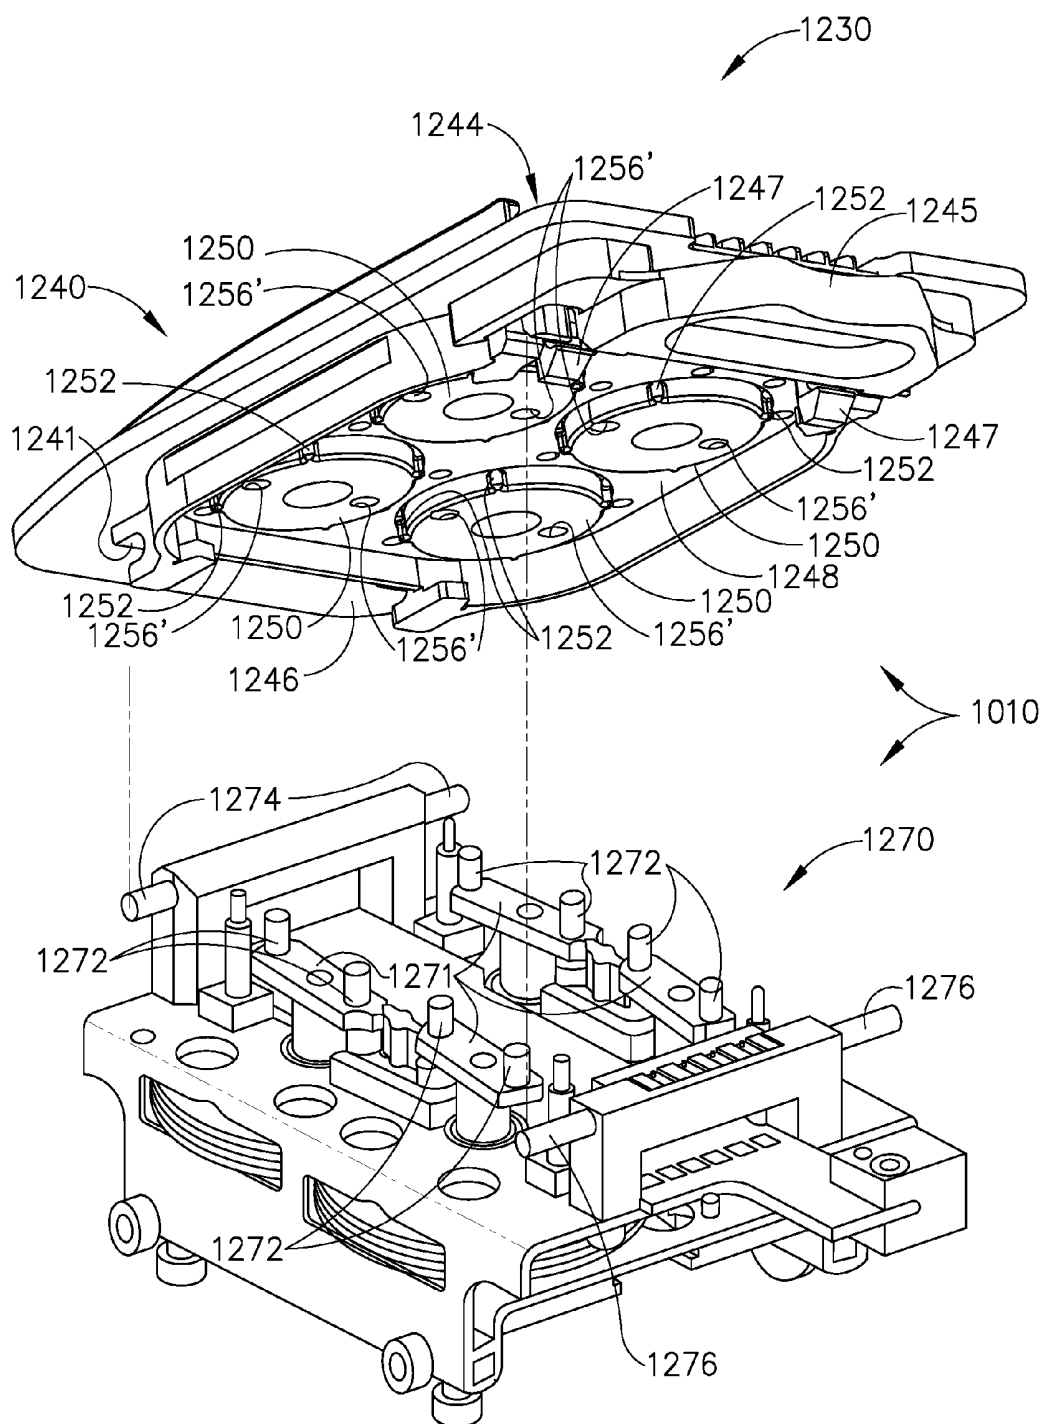


FIG. 24

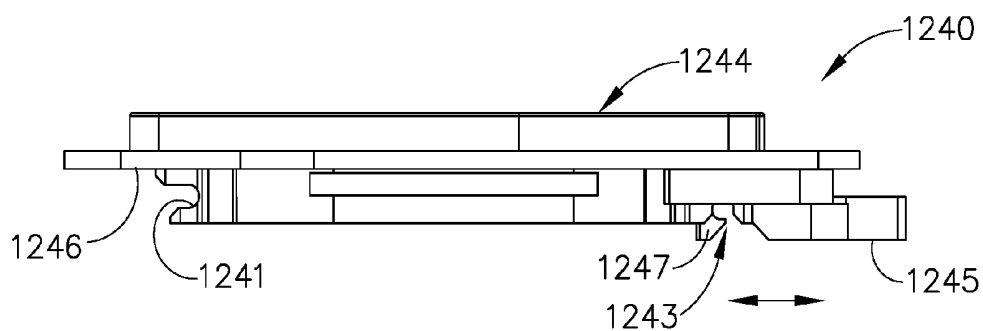


FIG. 25

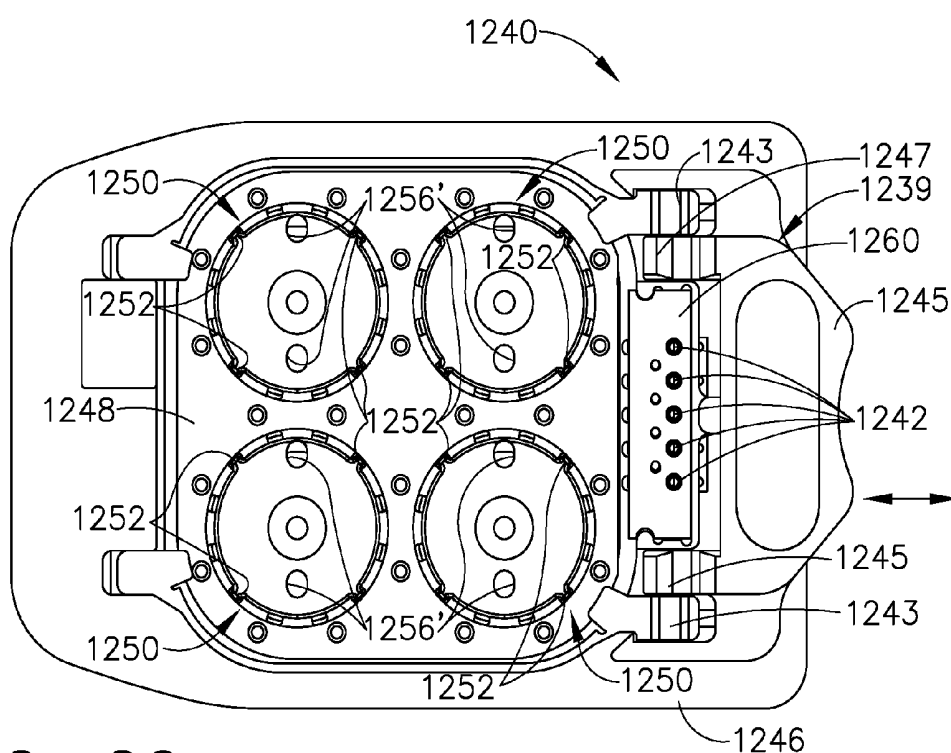


FIG. 26

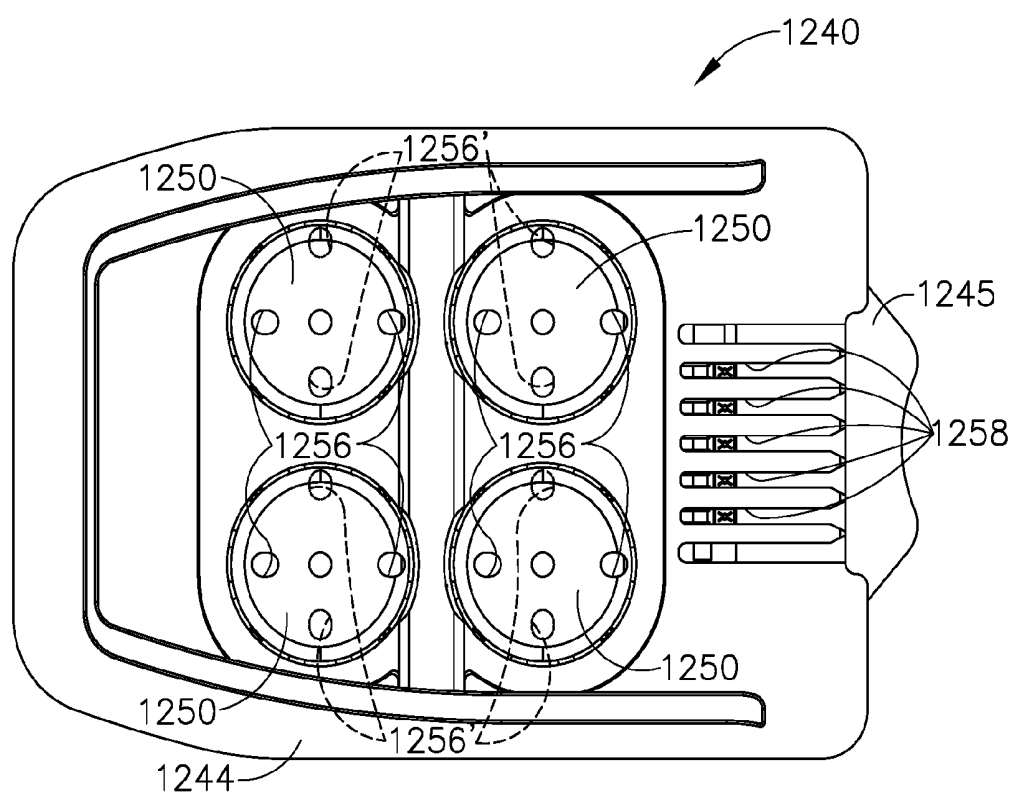


FIG. 27

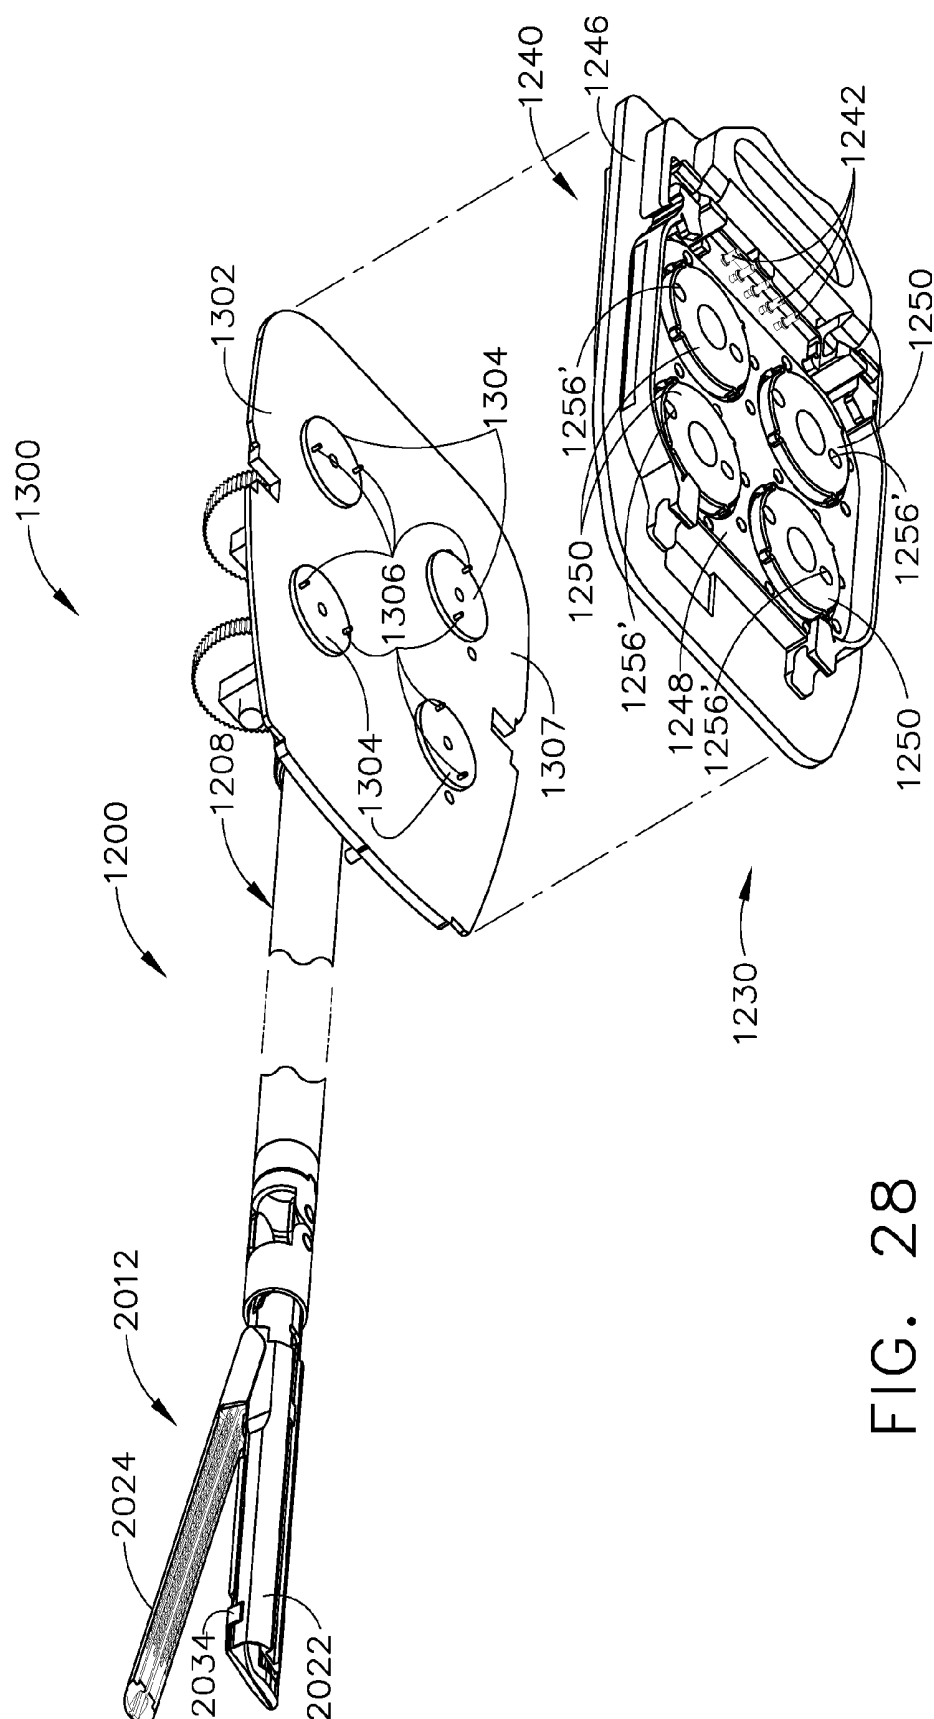


FIG. 28

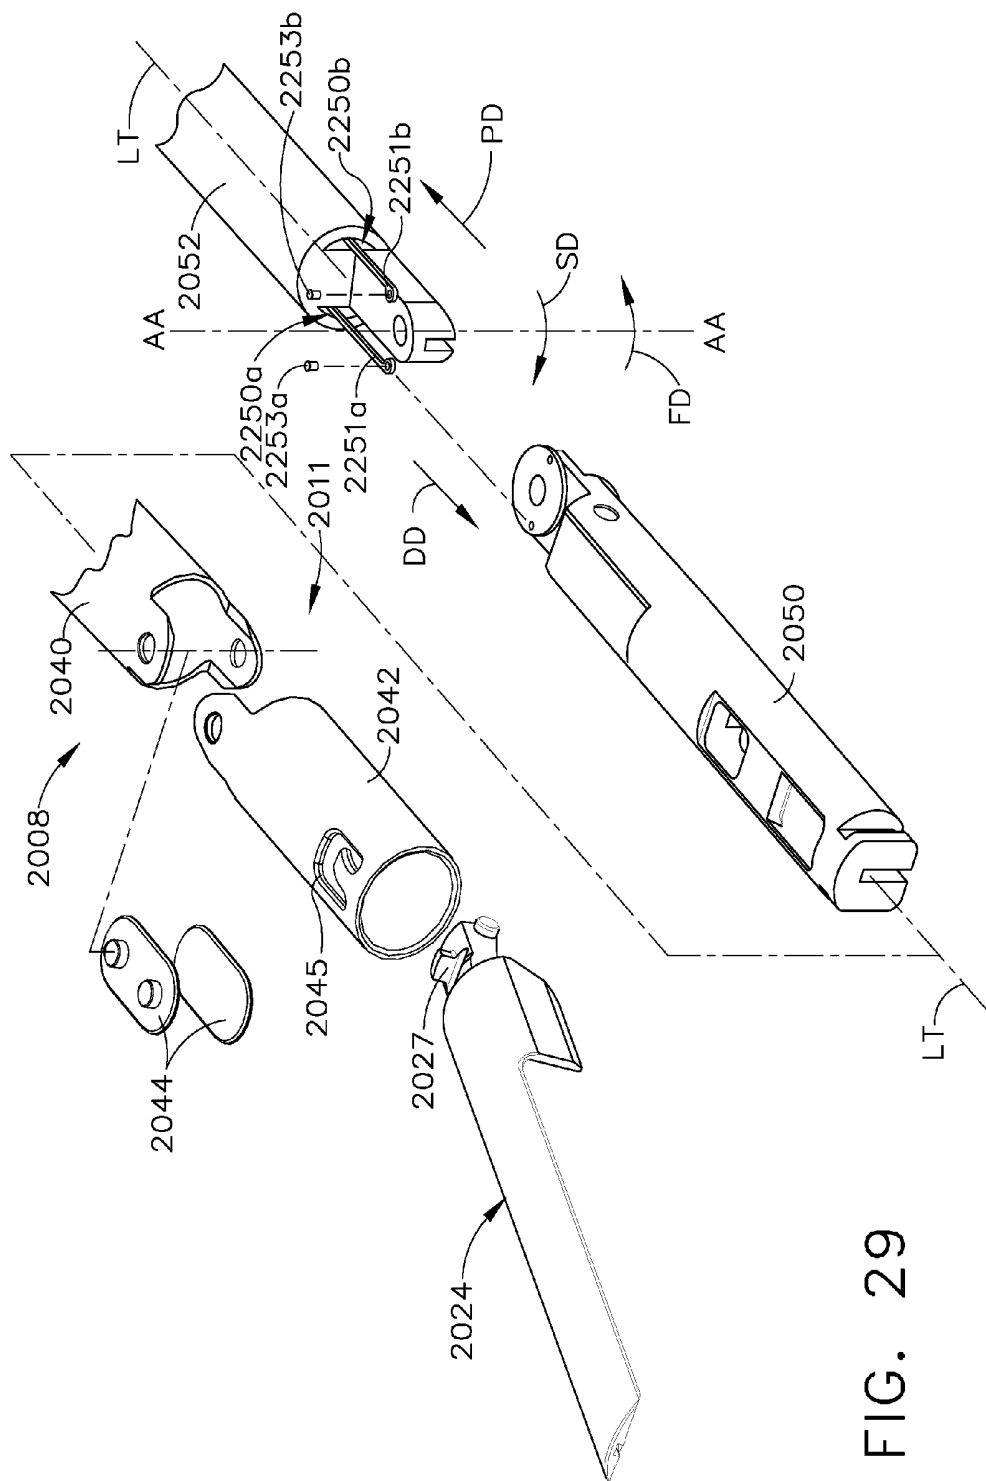


FIG. 29

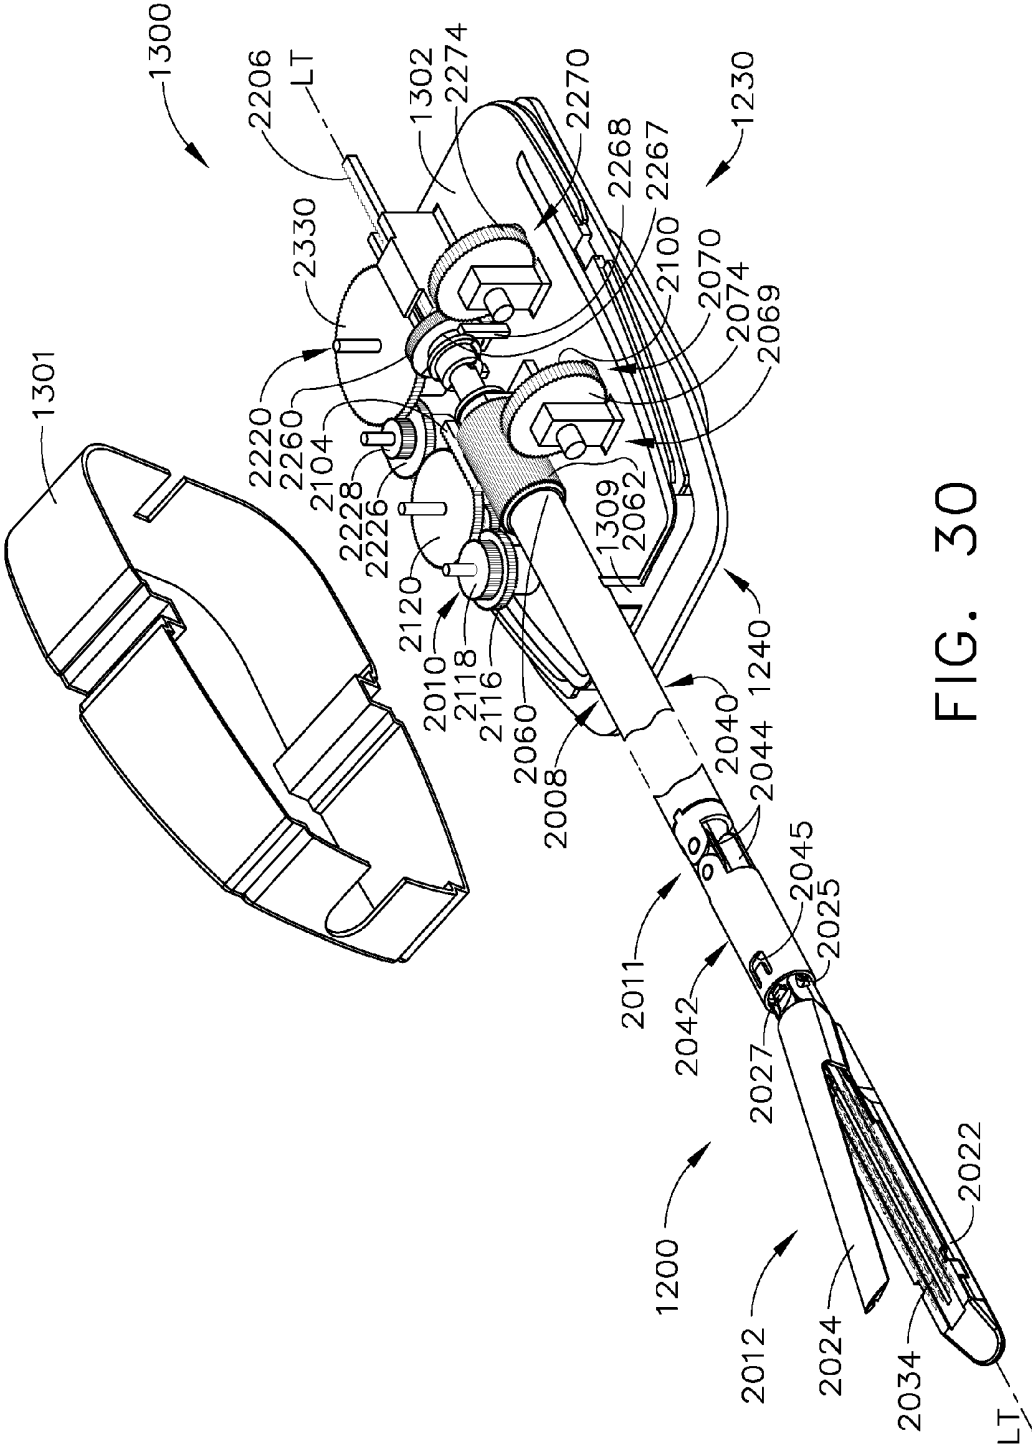


FIG. 30

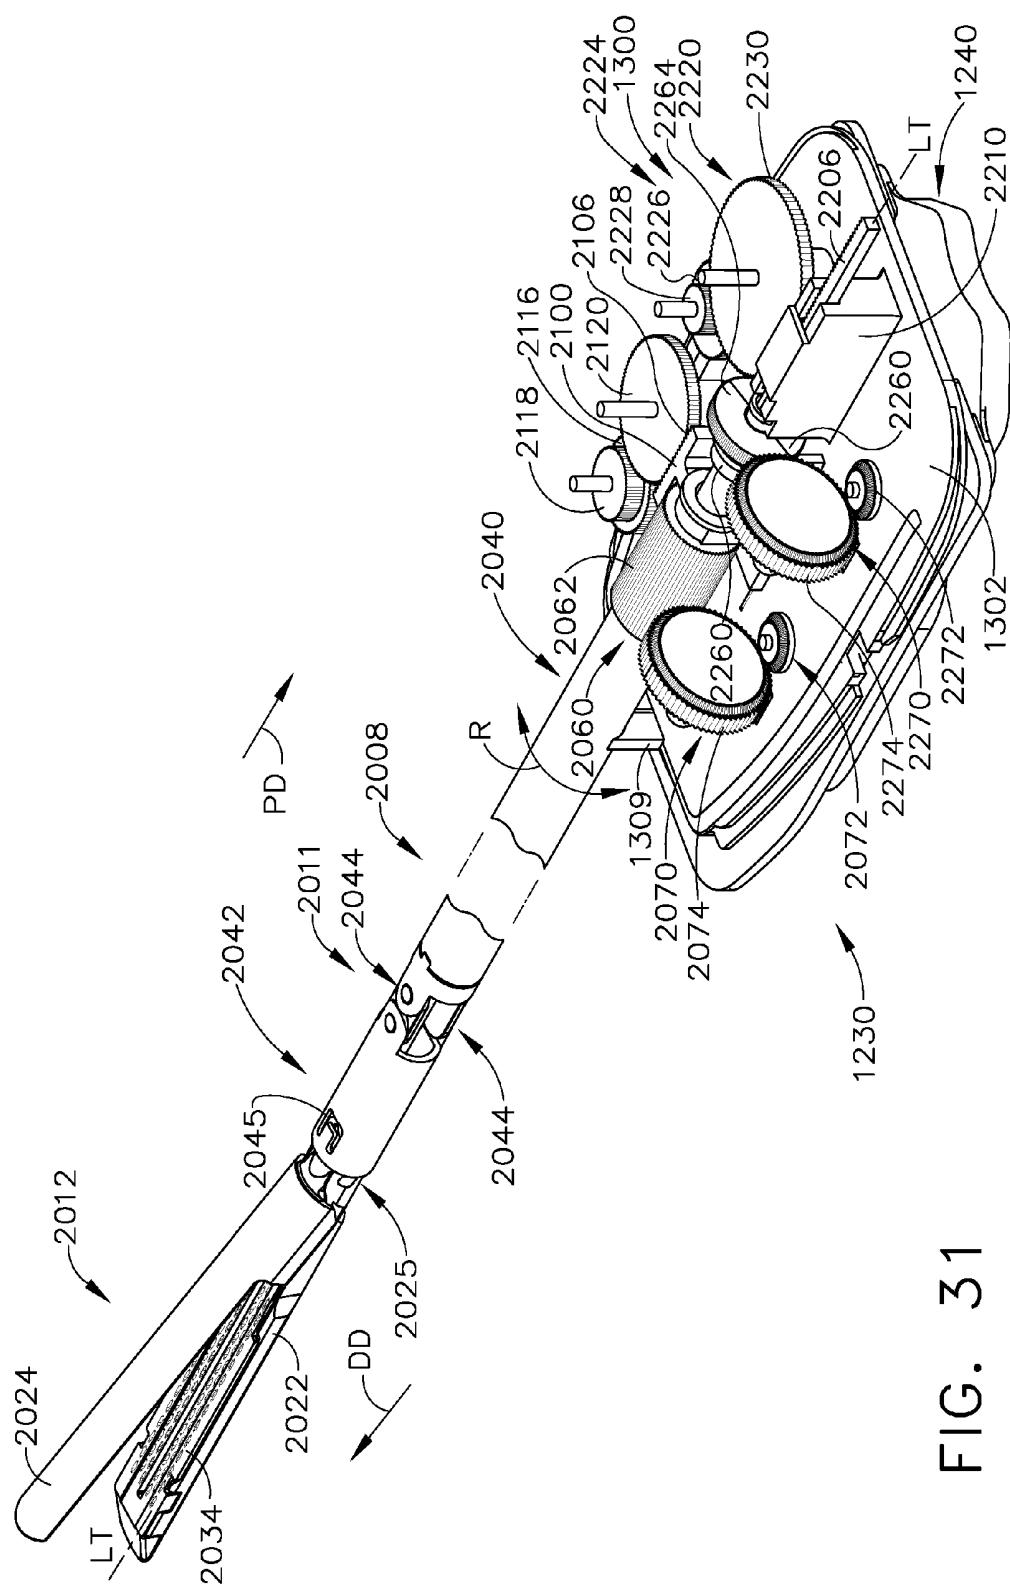


FIG. 31

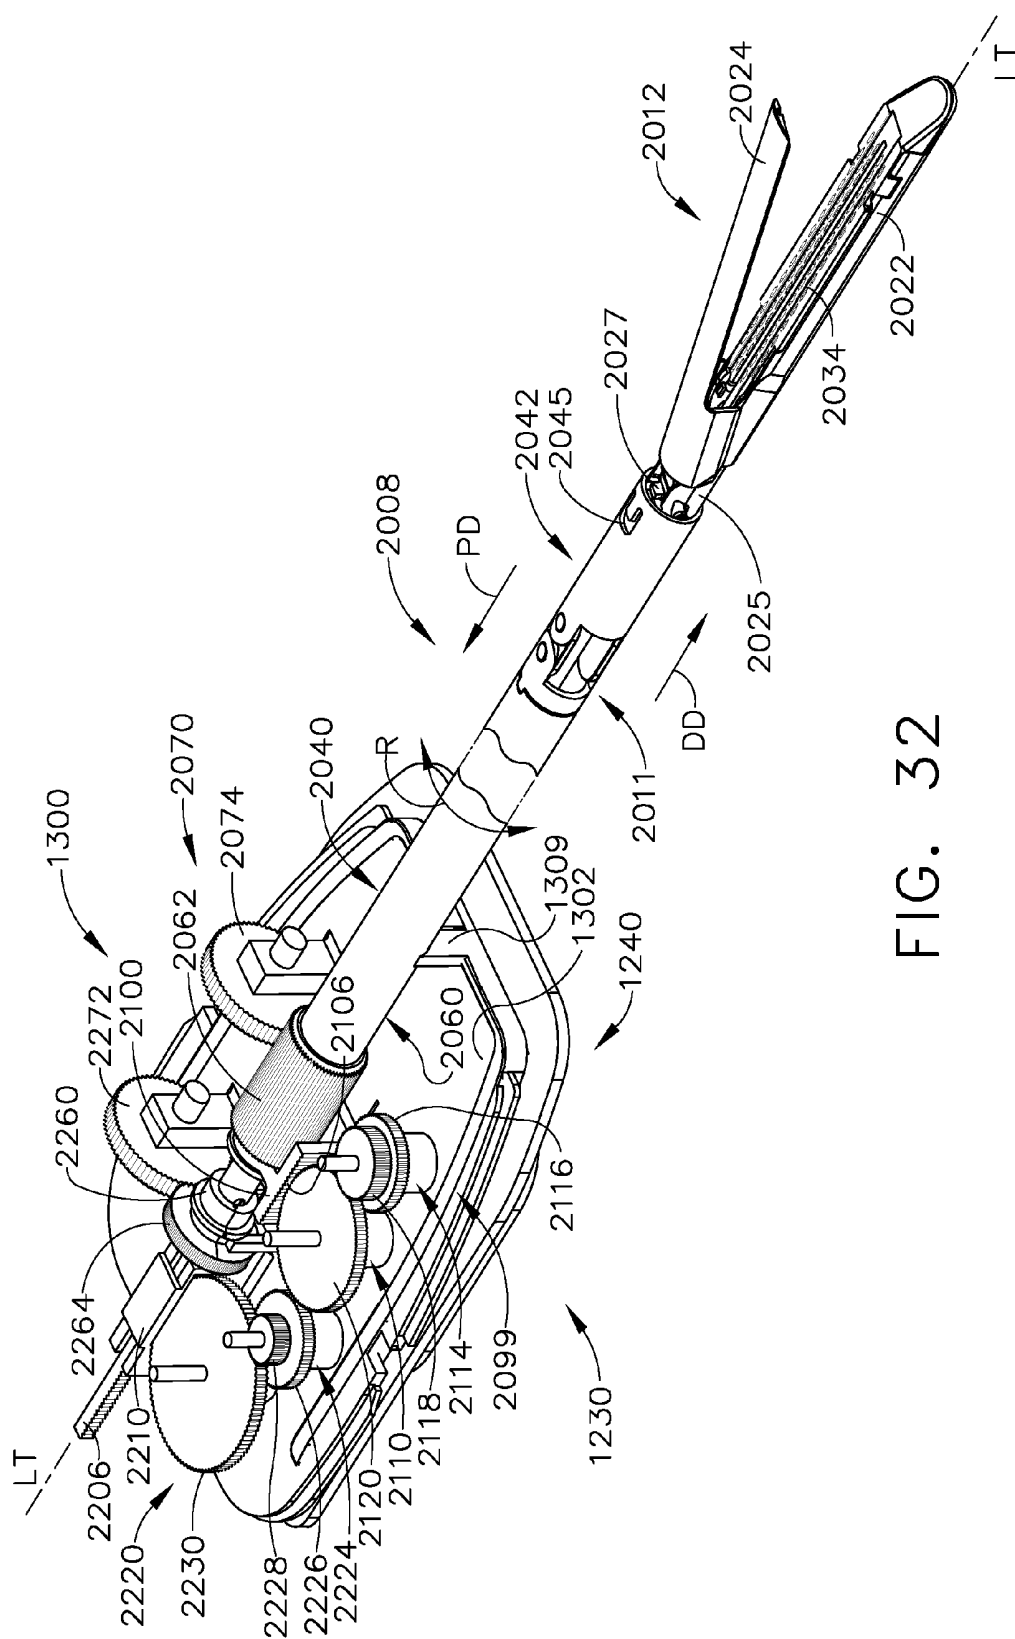


FIG. 32

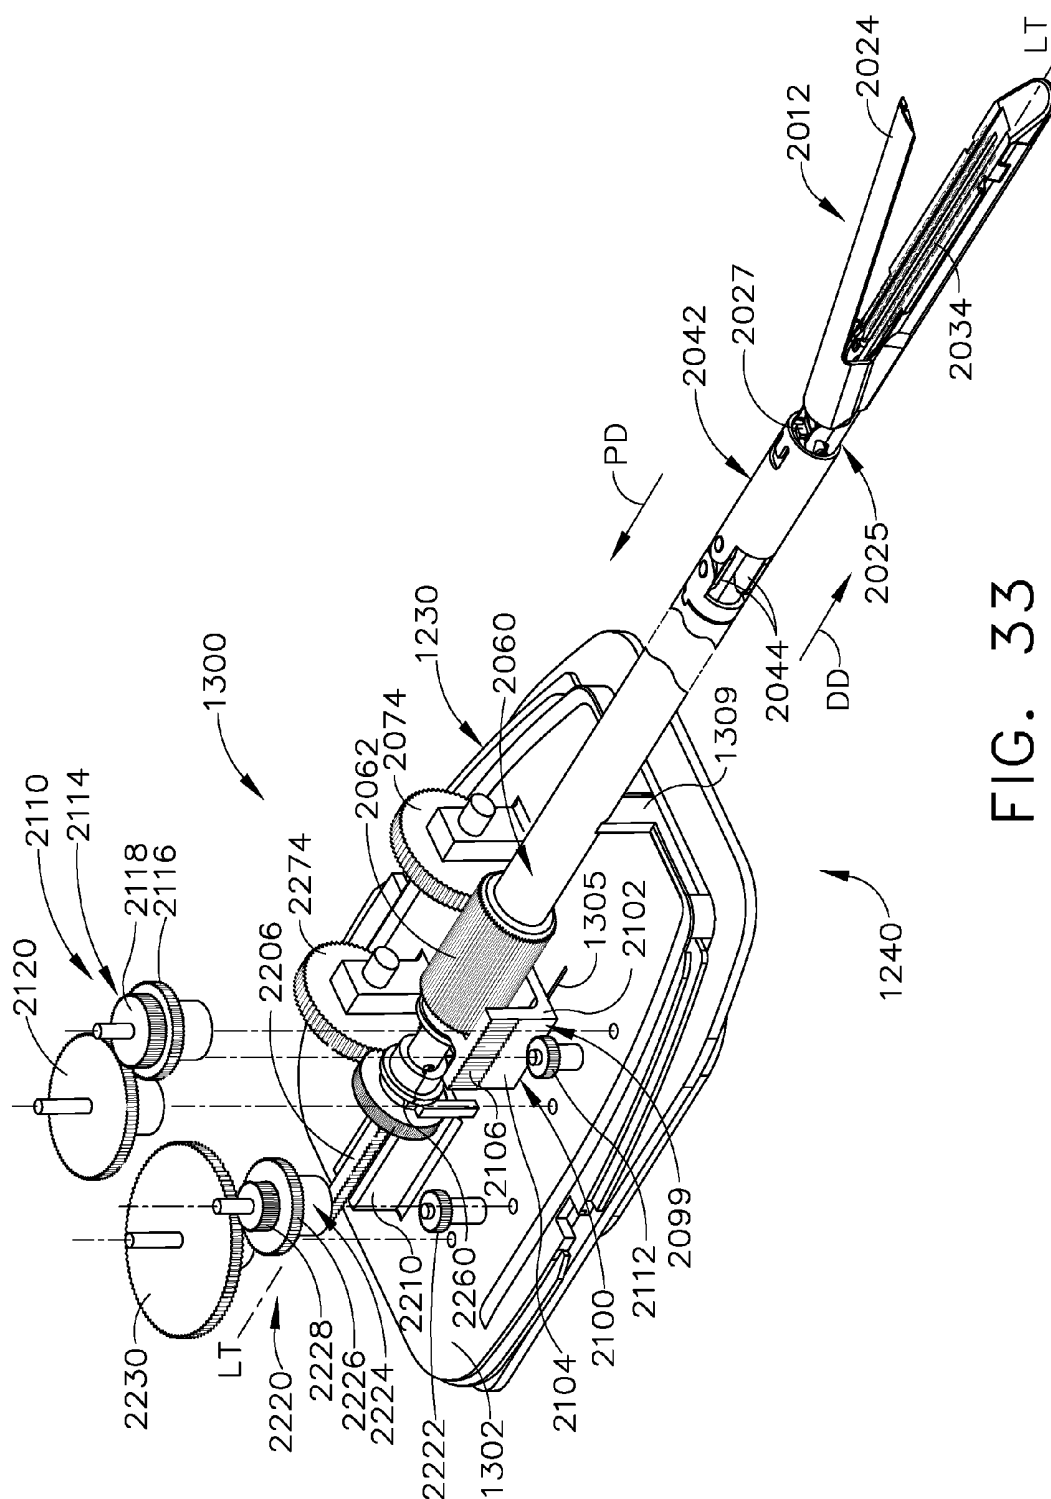


FIG. 33

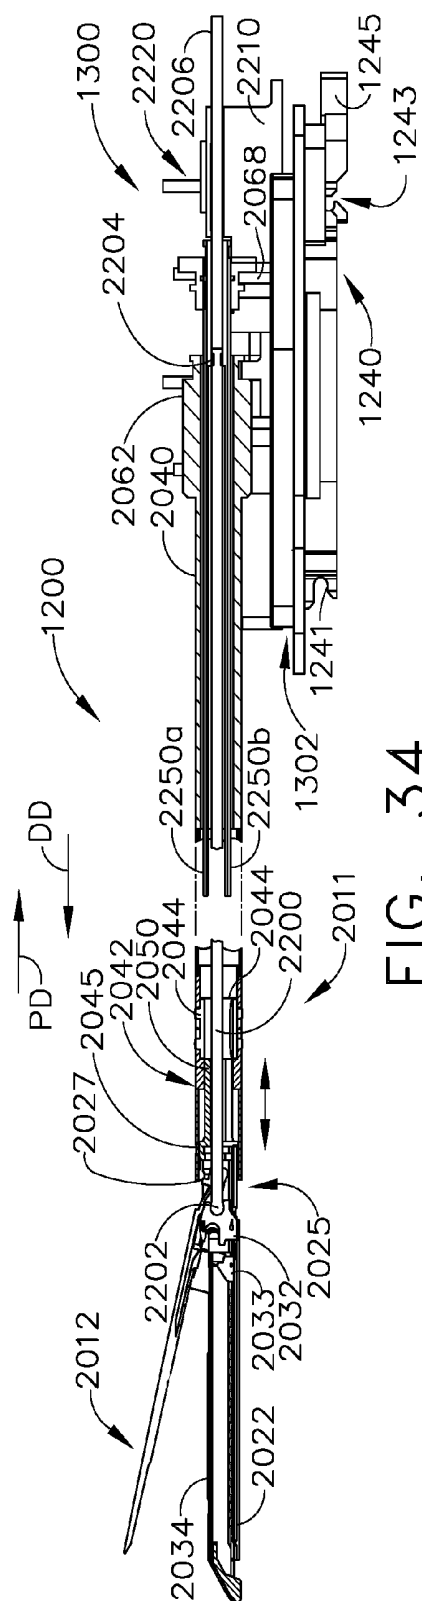


FIG. 34

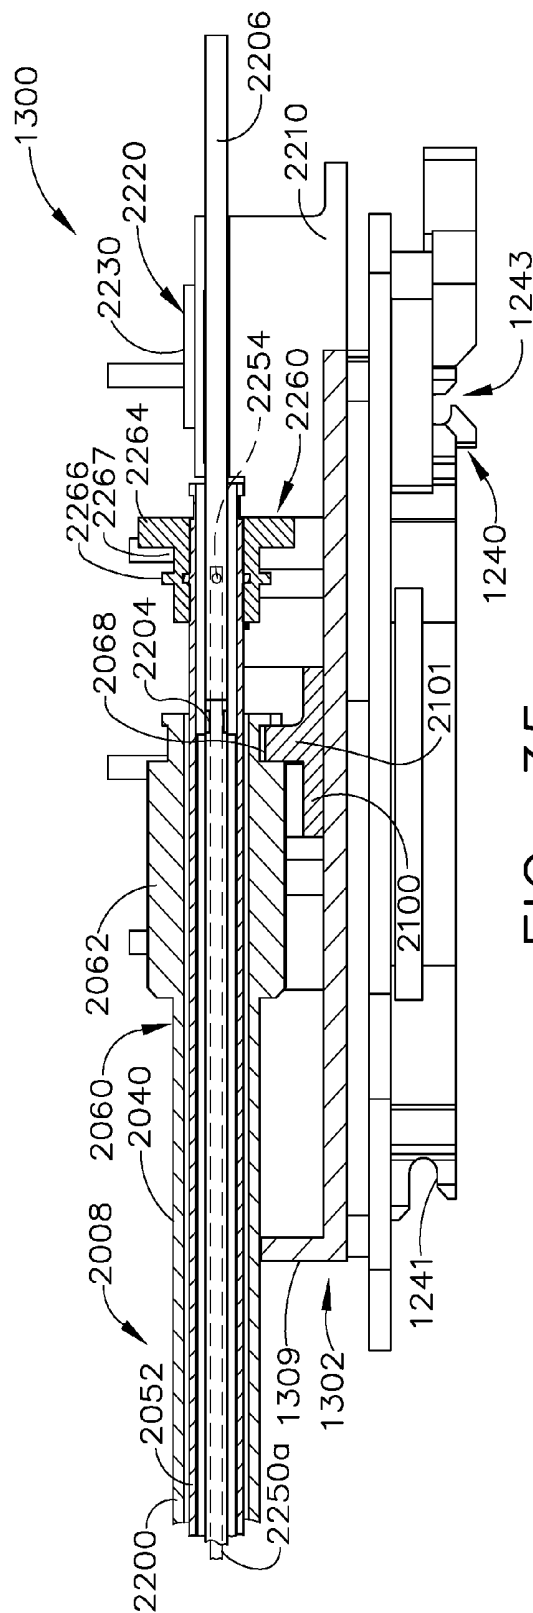


FIG. 35

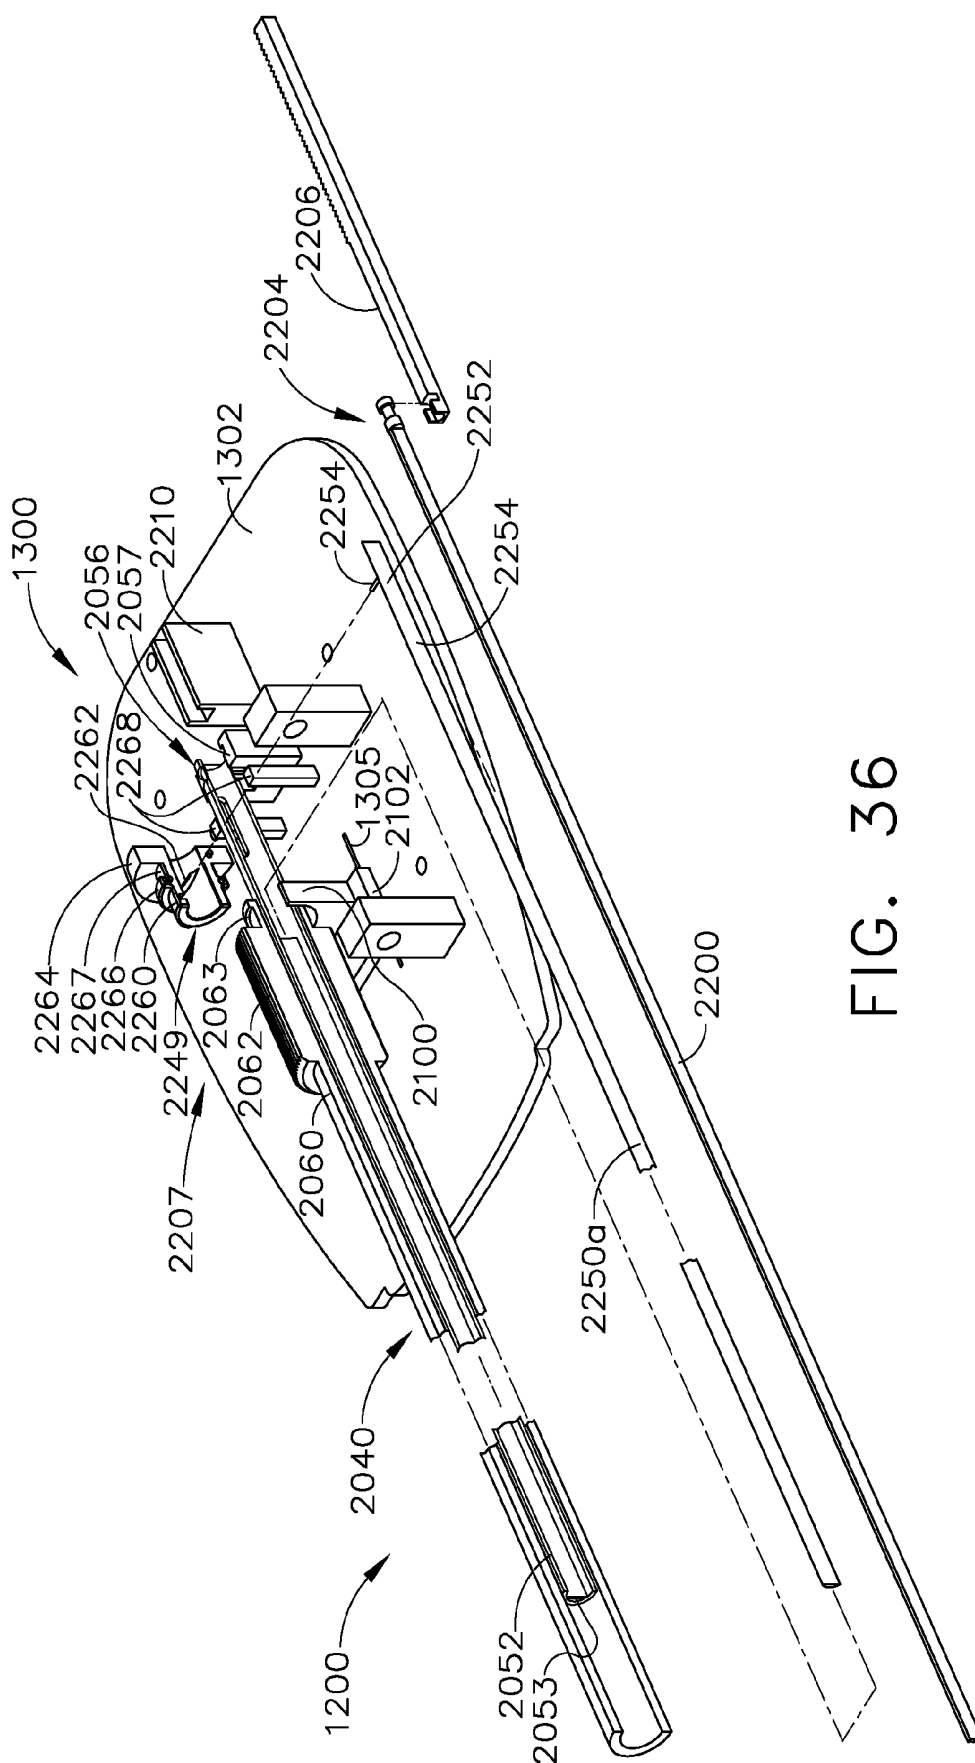
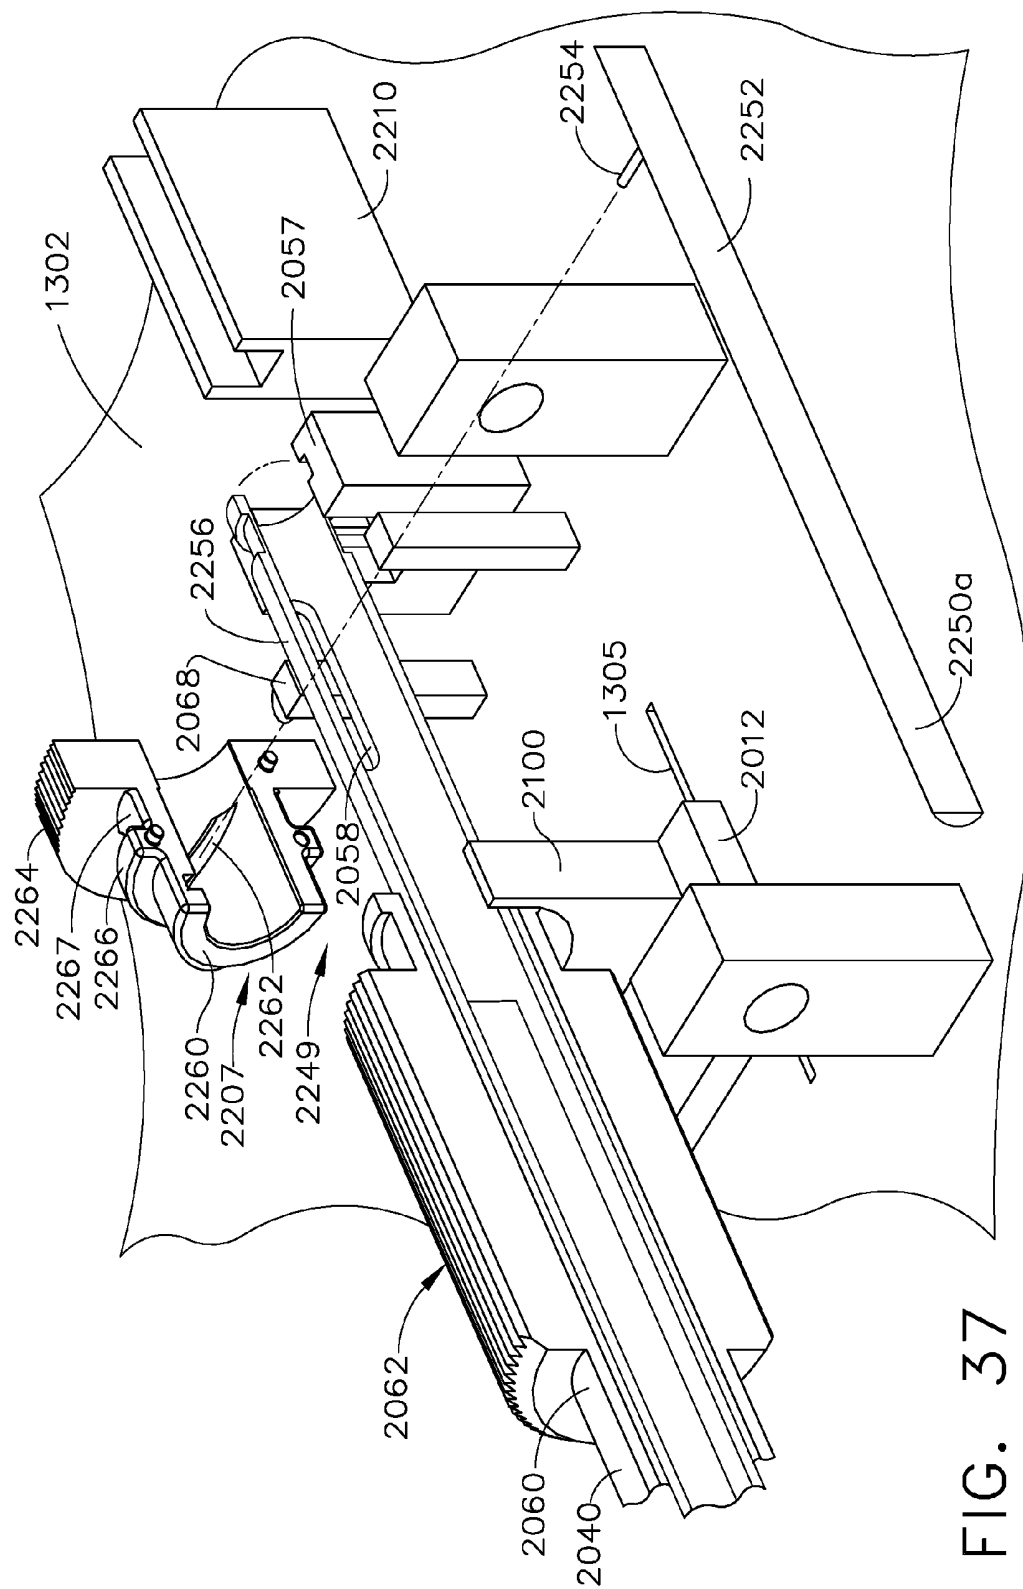


FIG. 36



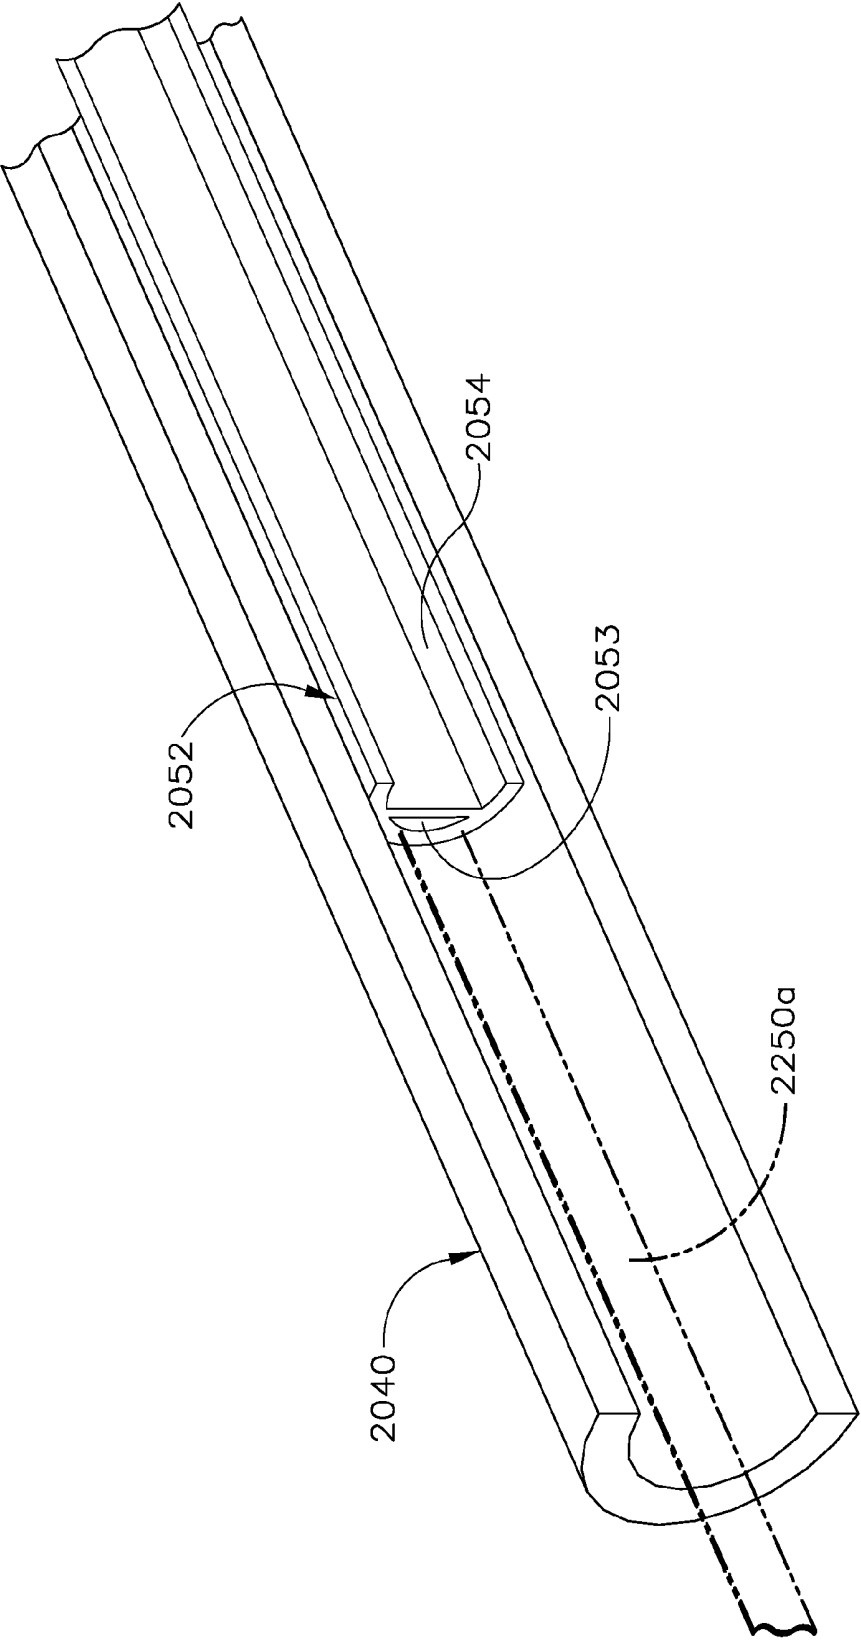


FIG. 38

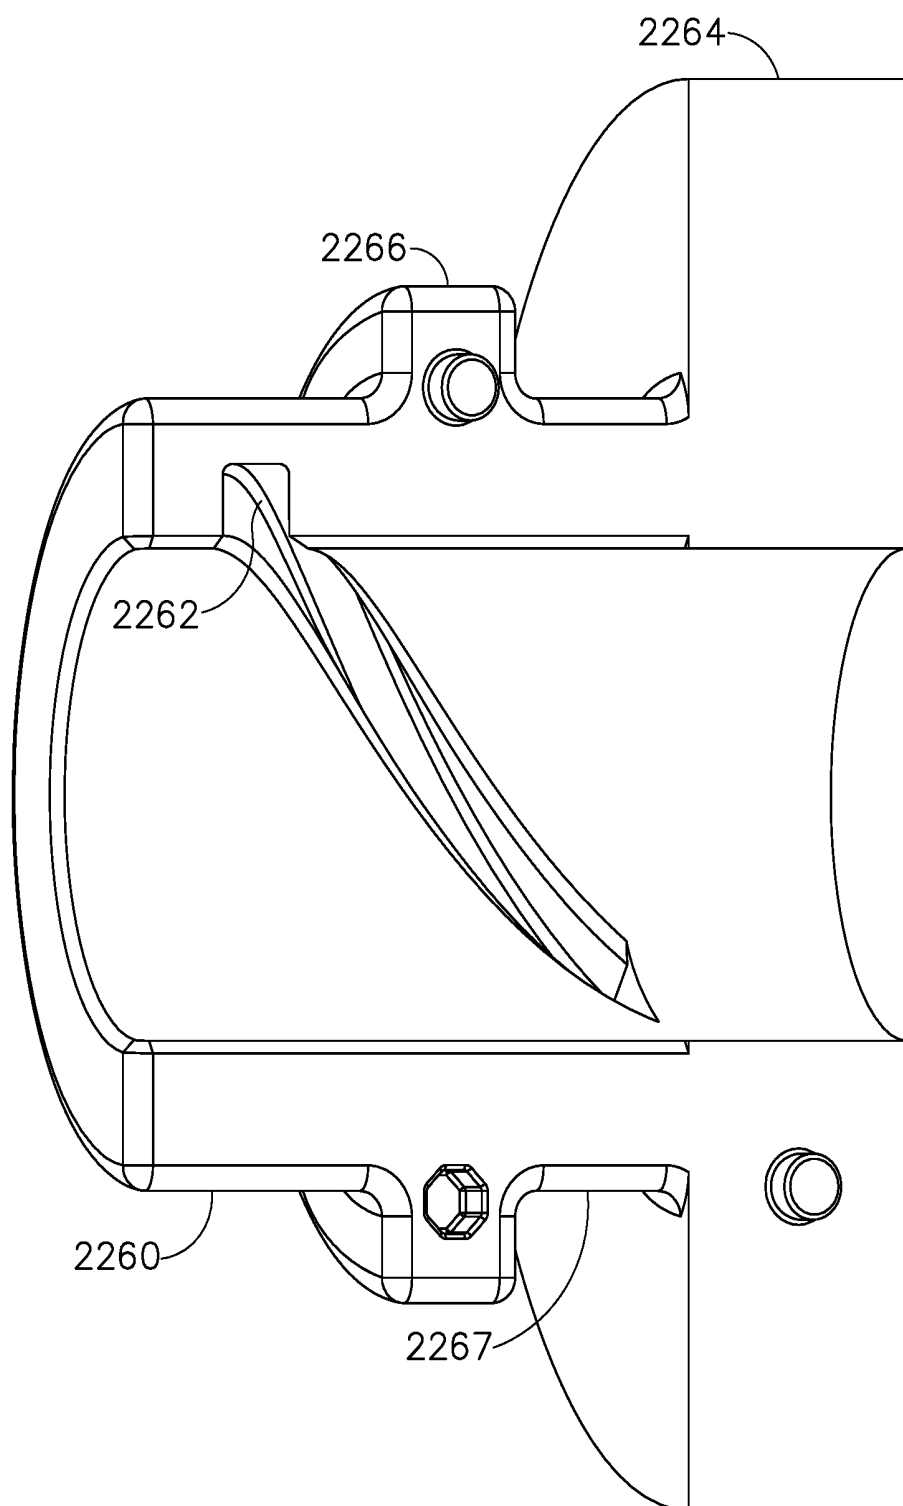


FIG. 39

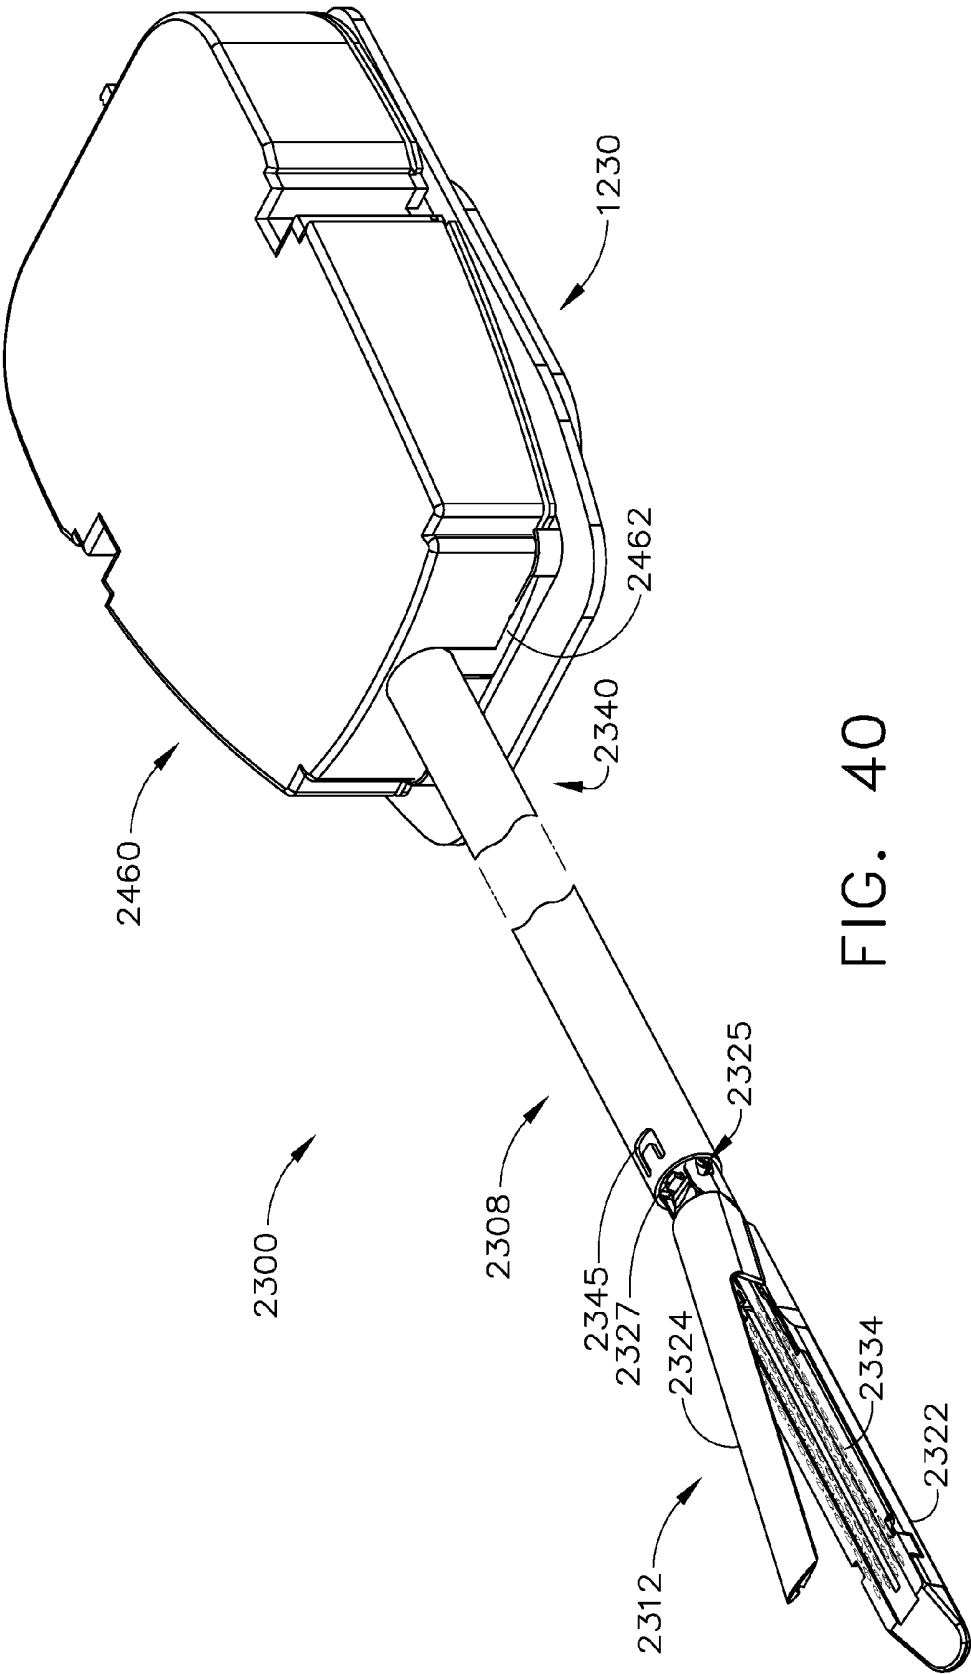


FIG. 40

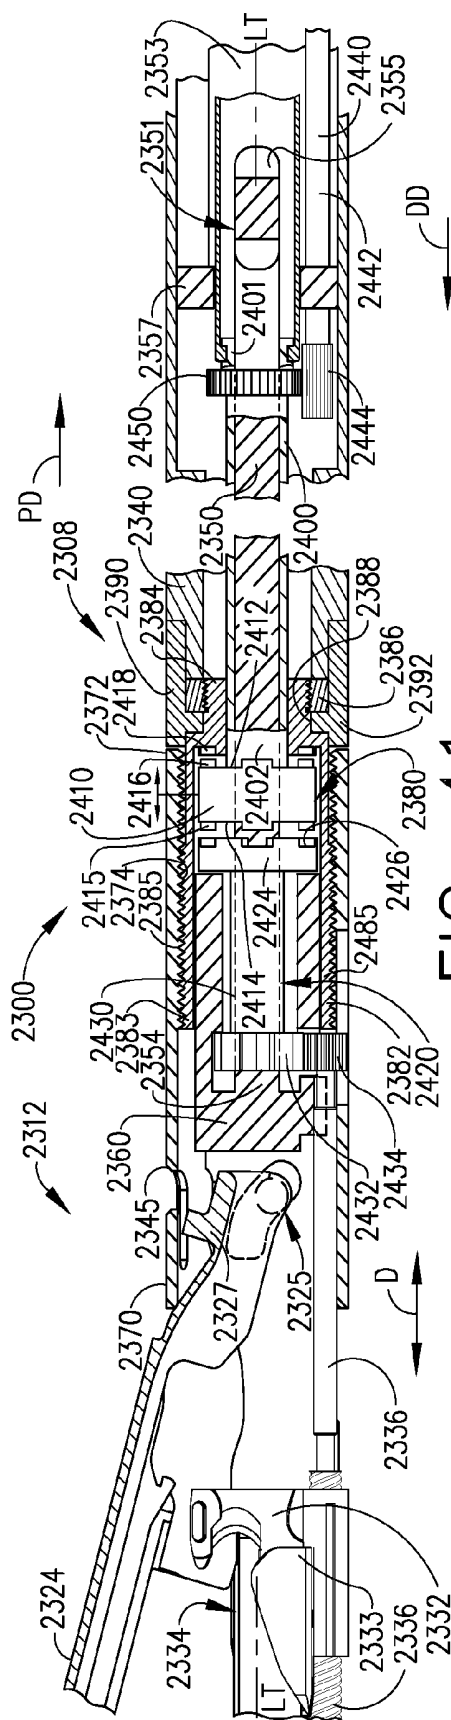


FIG. 41

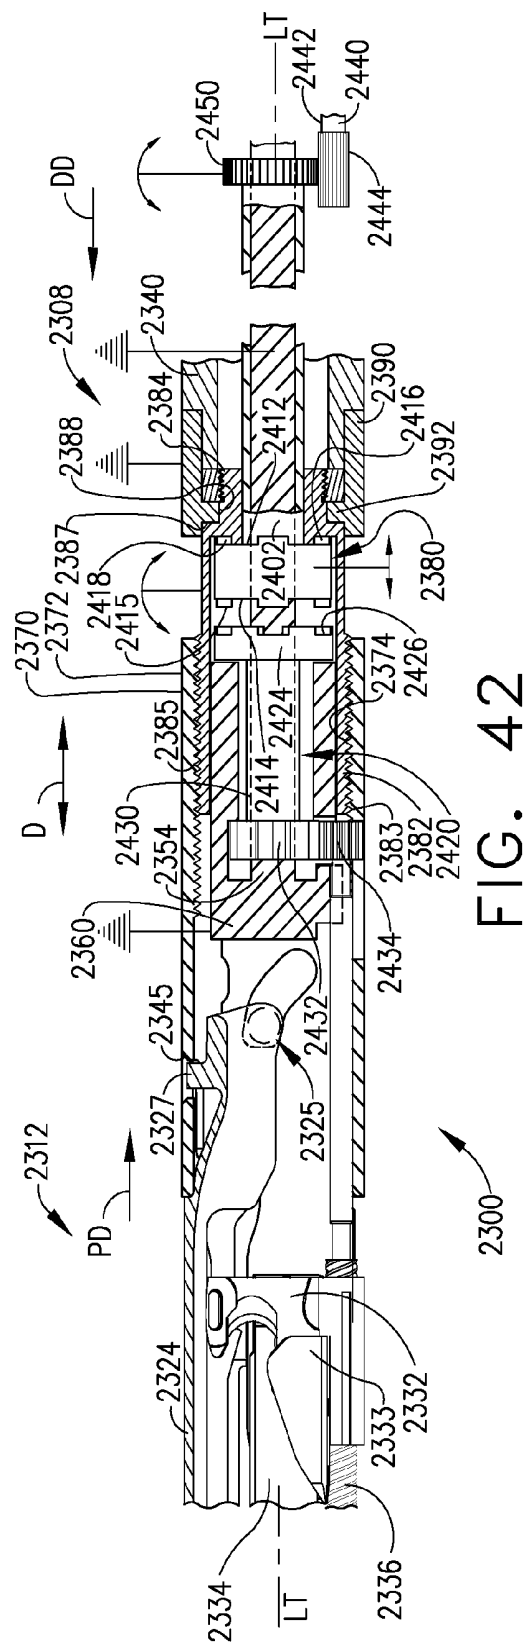


FIG. 42

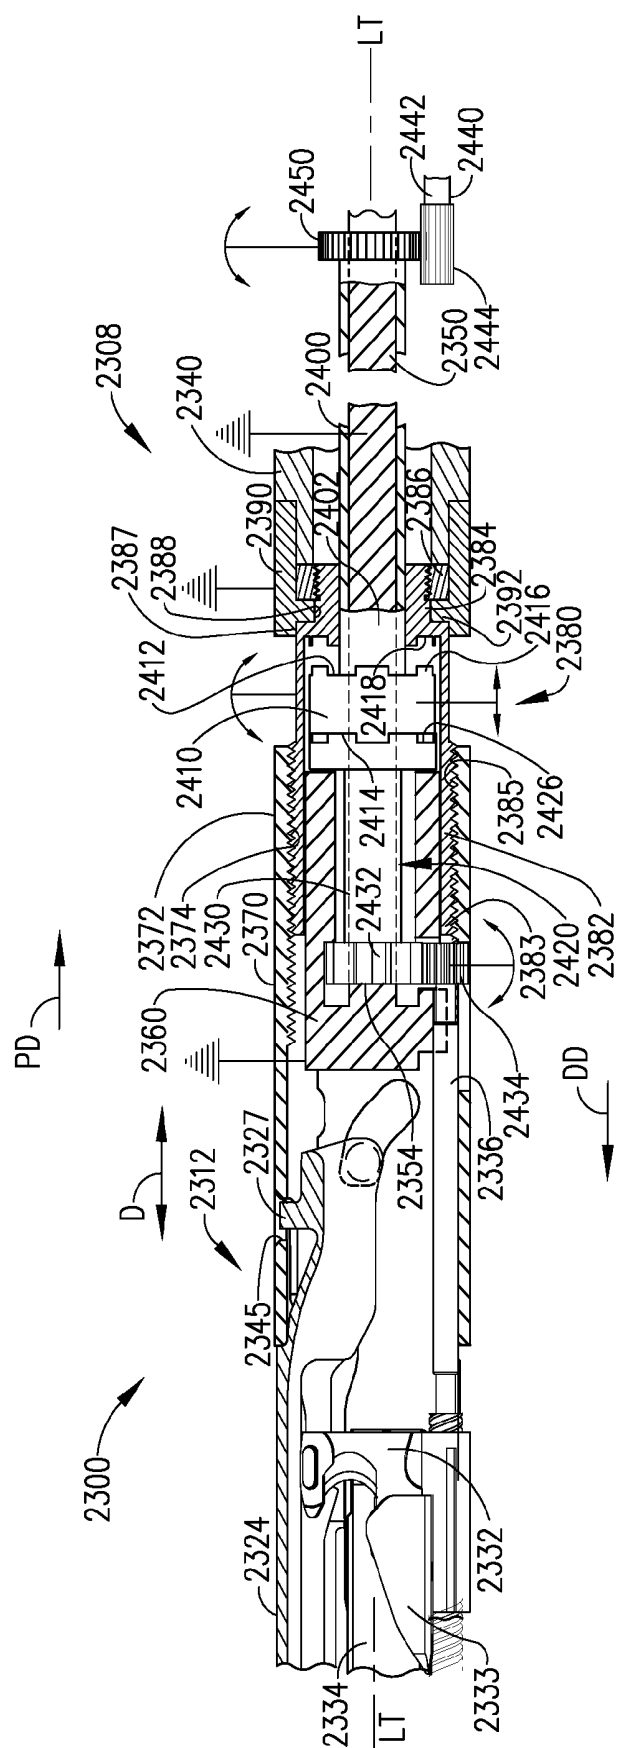


FIG. 43

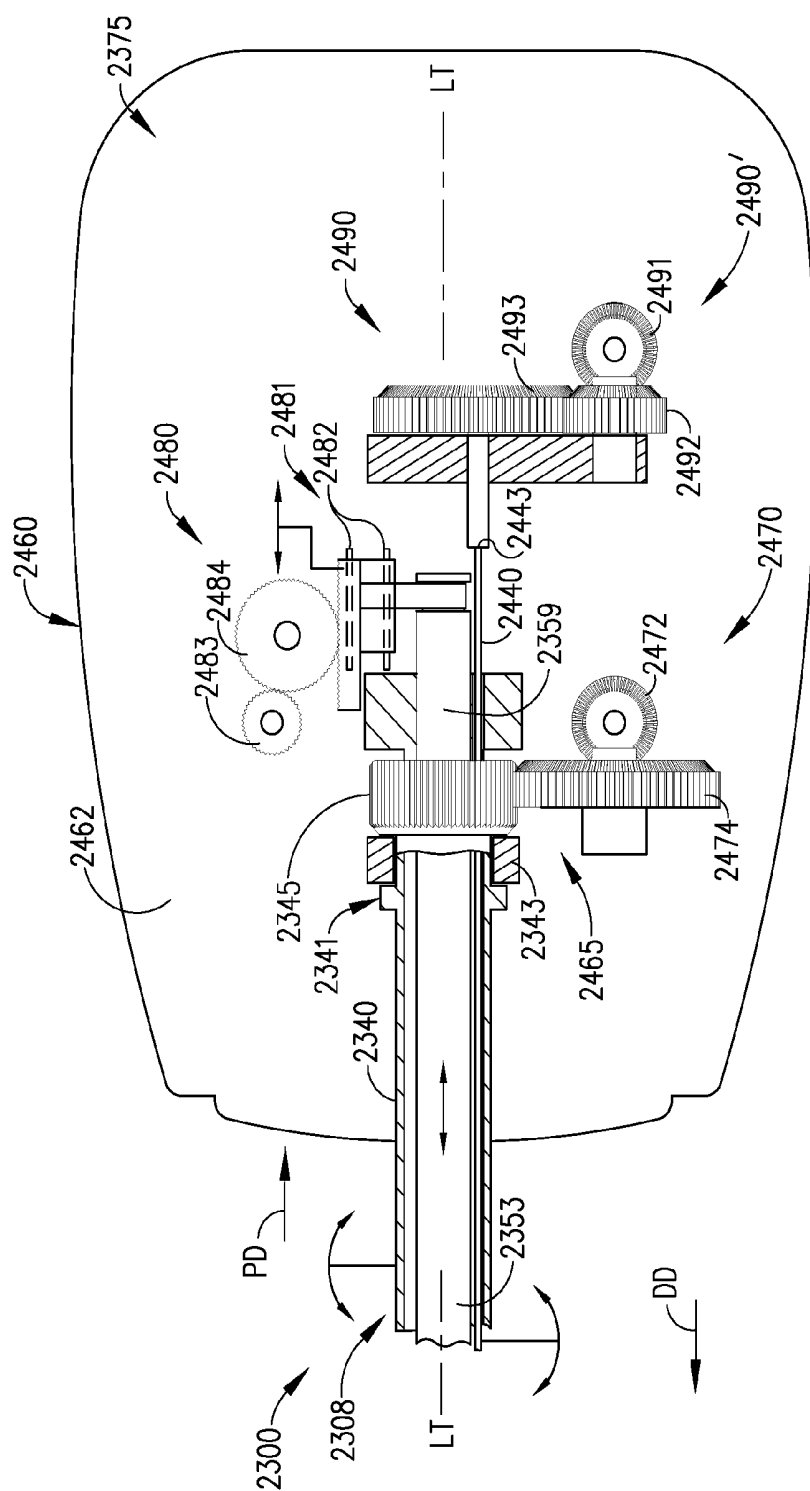


FIG. 44

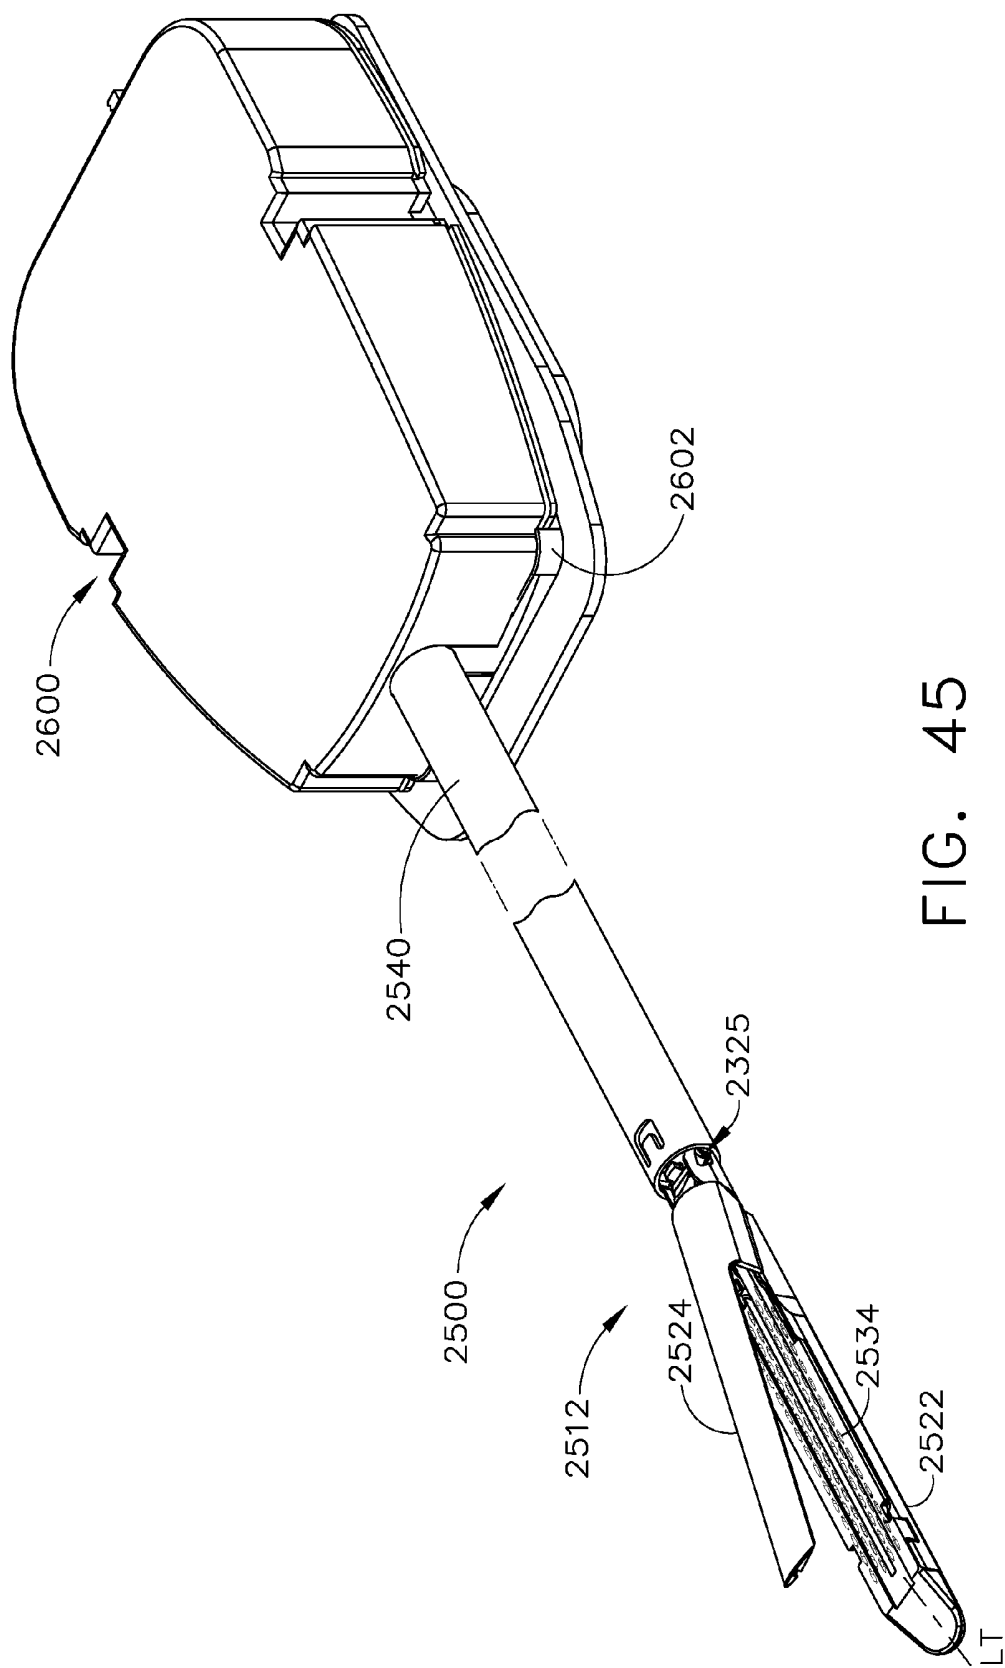


FIG. 45

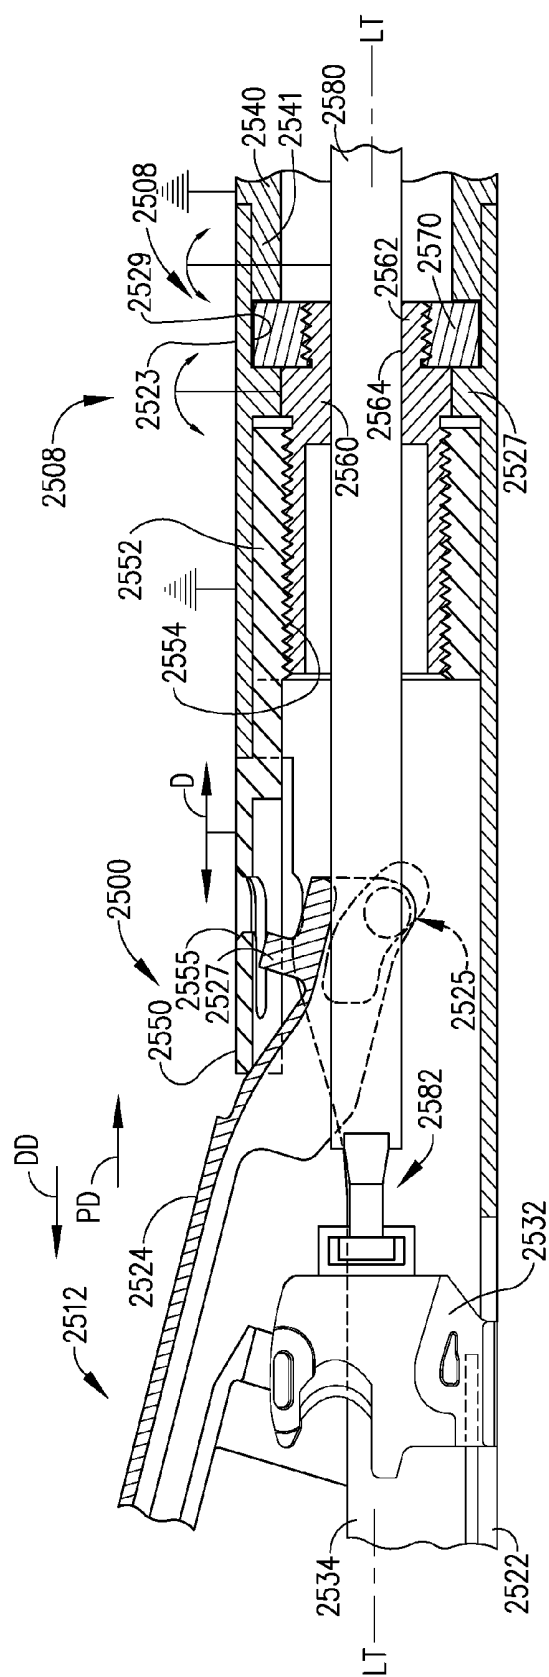


FIG. 46

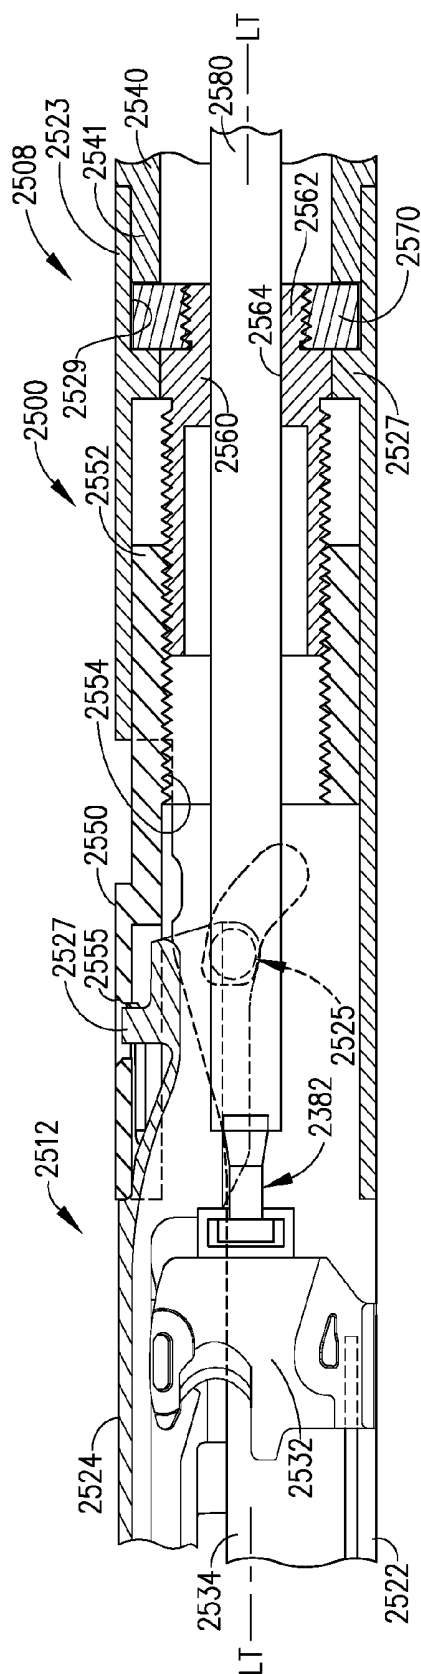


FIG. 47

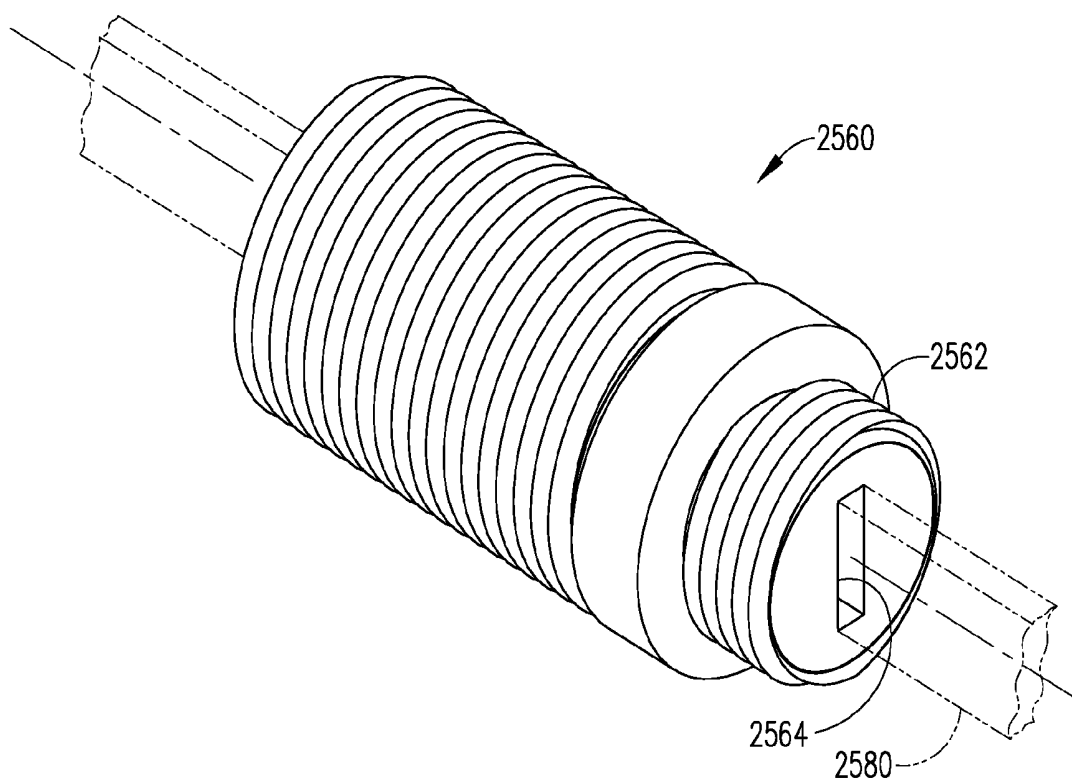


FIG. 48

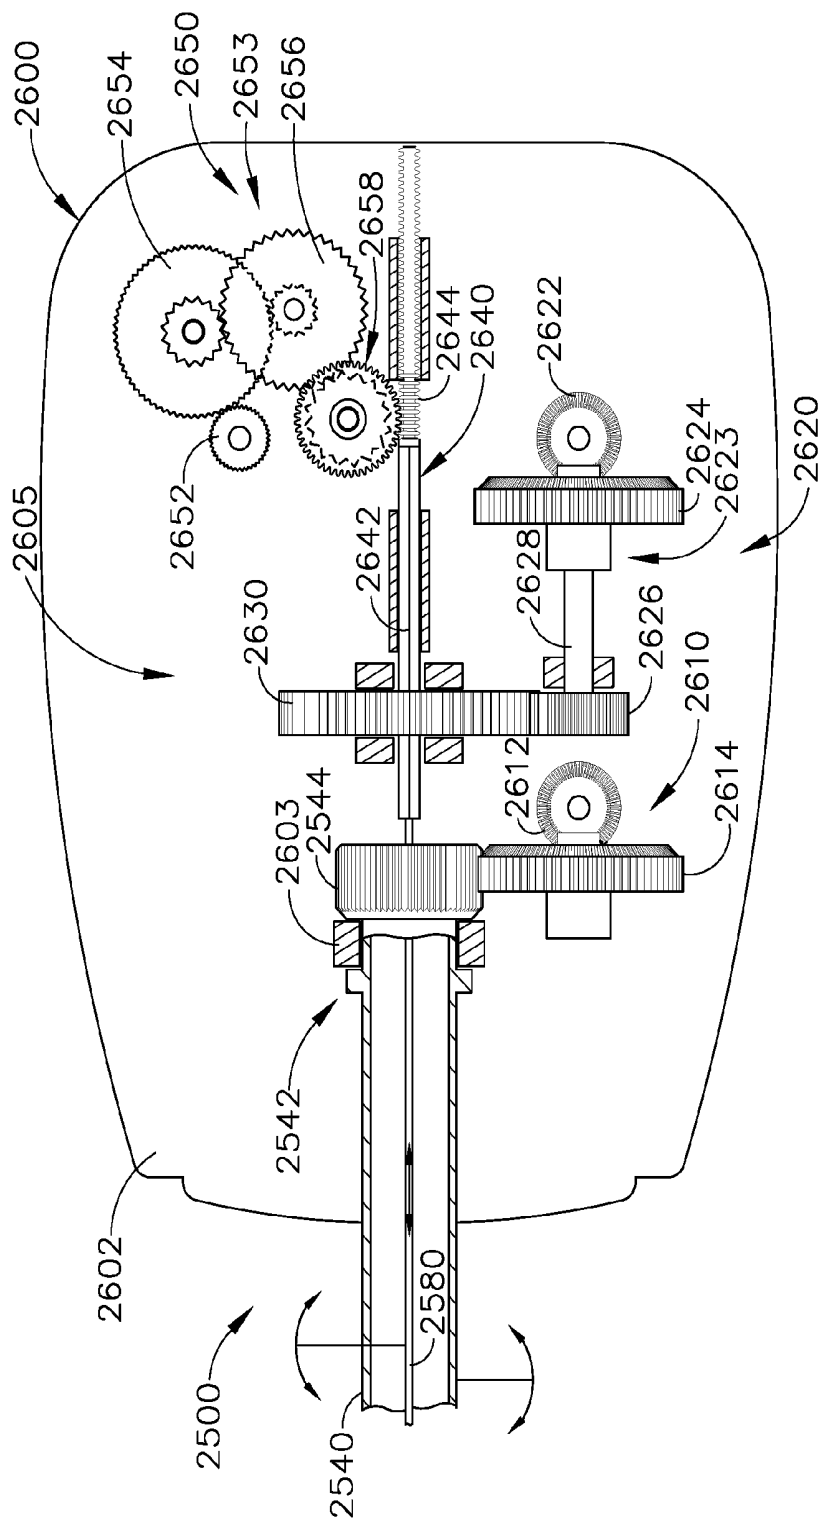
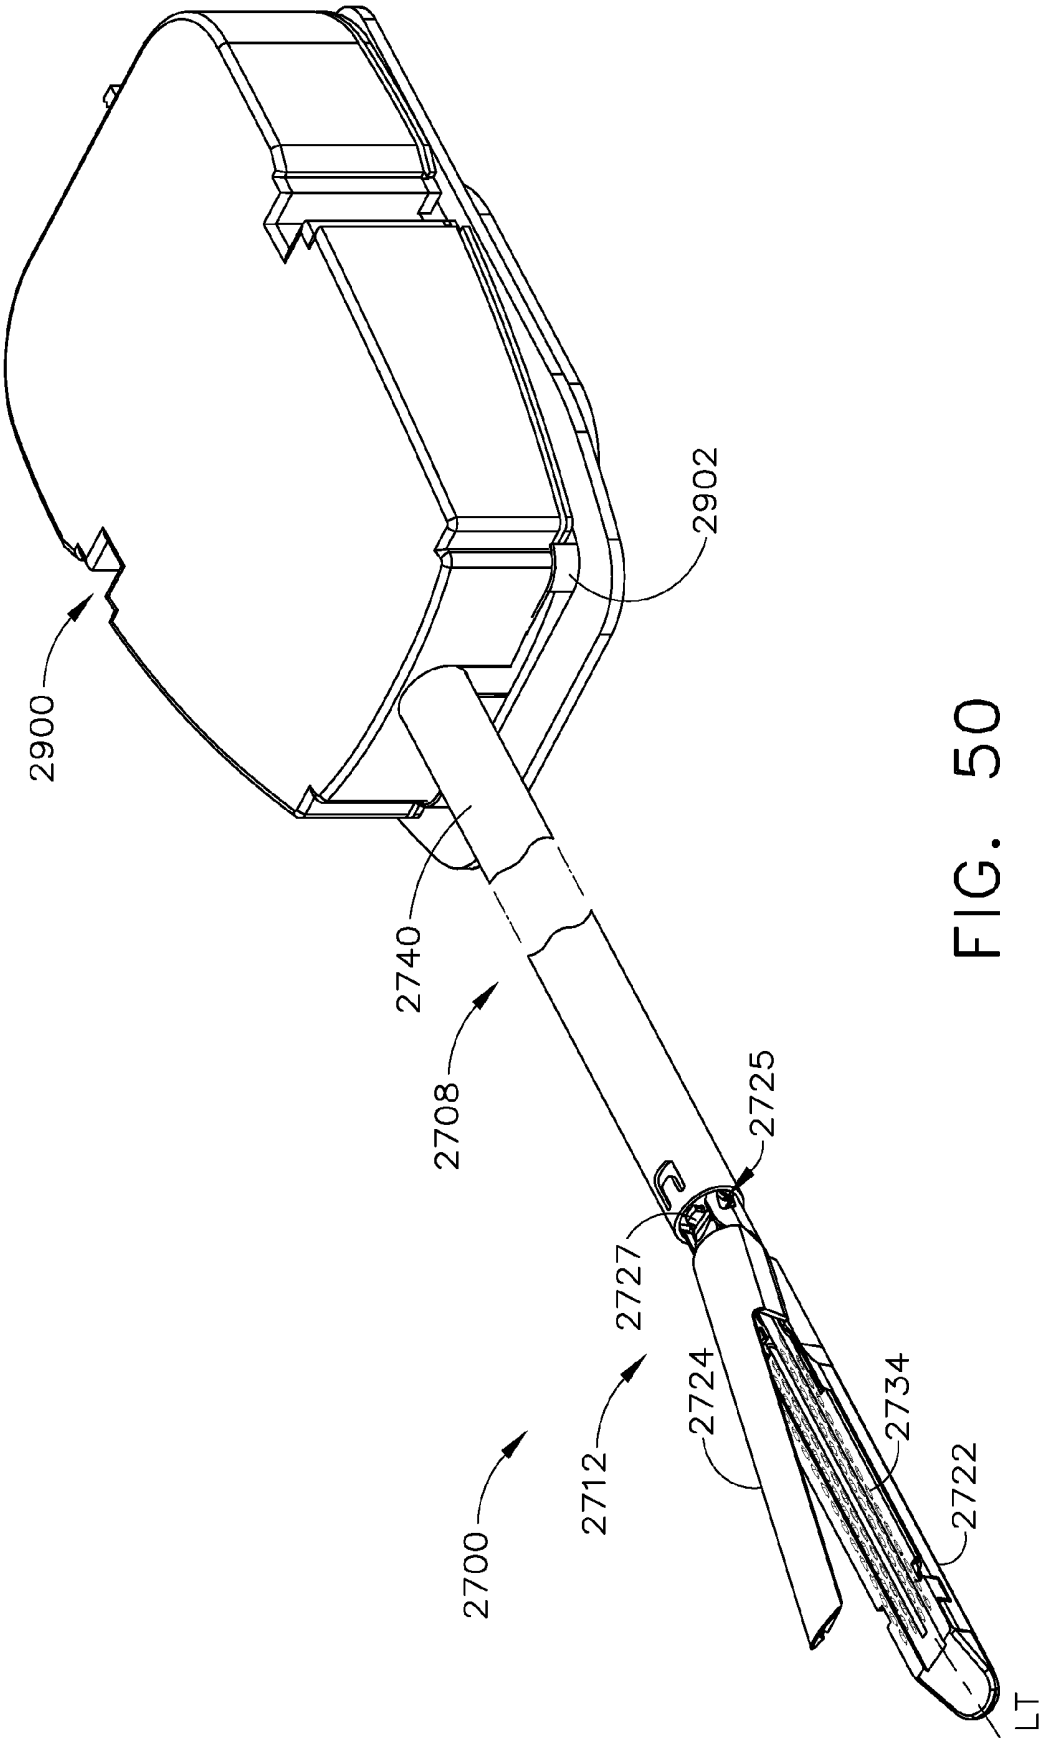


FIG. 49



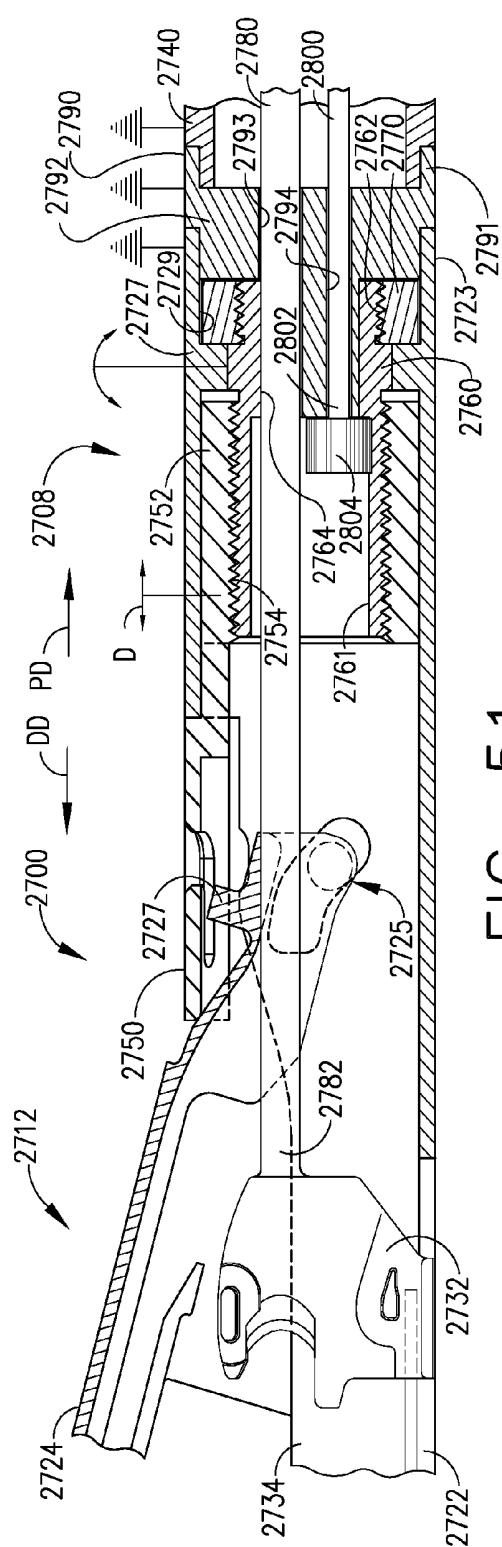


FIG. 51

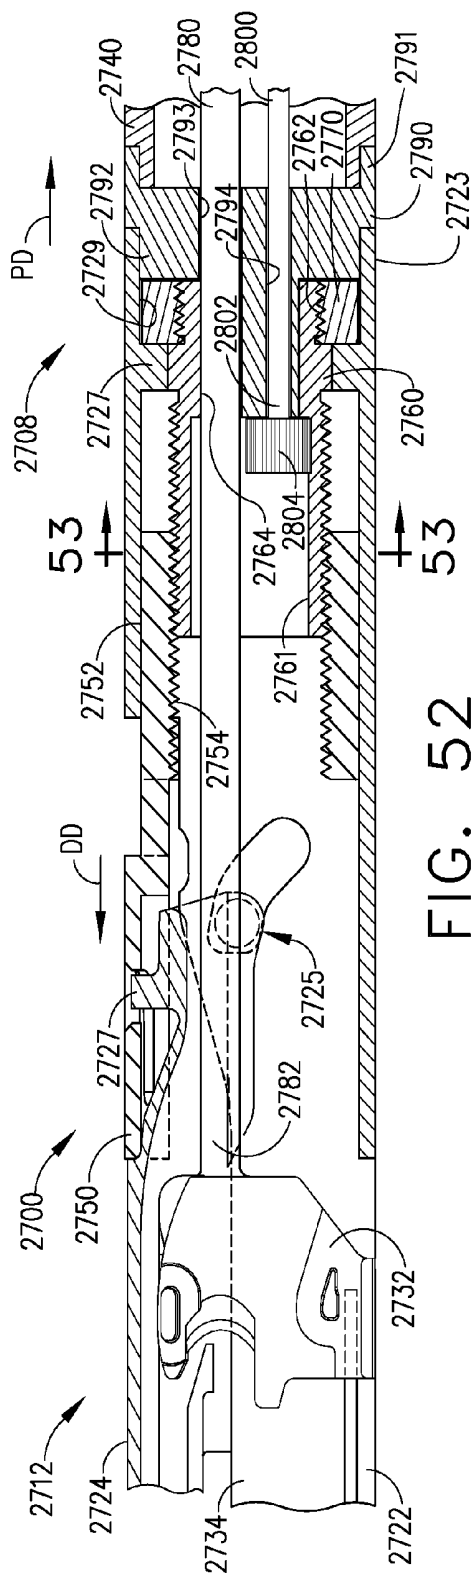


FIG. 52

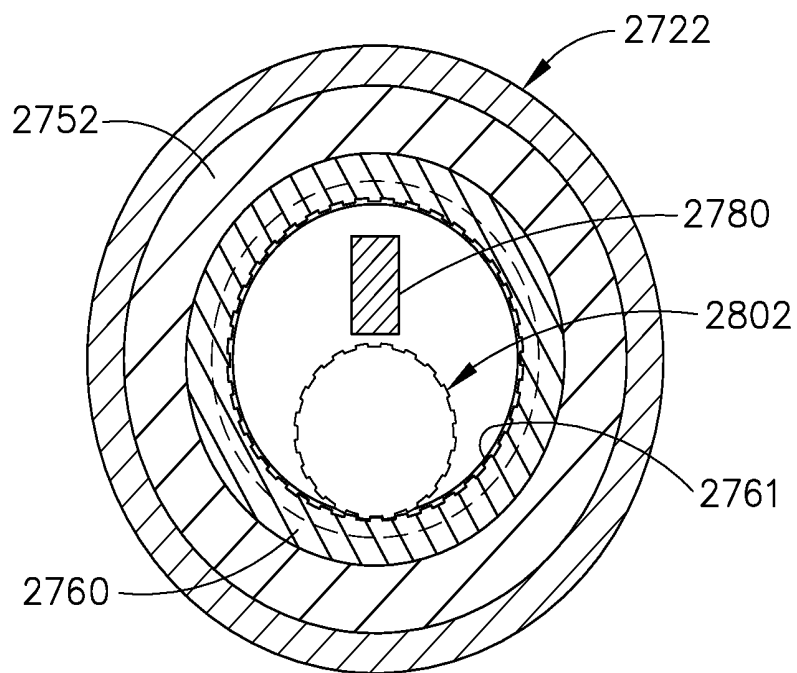


FIG. 53

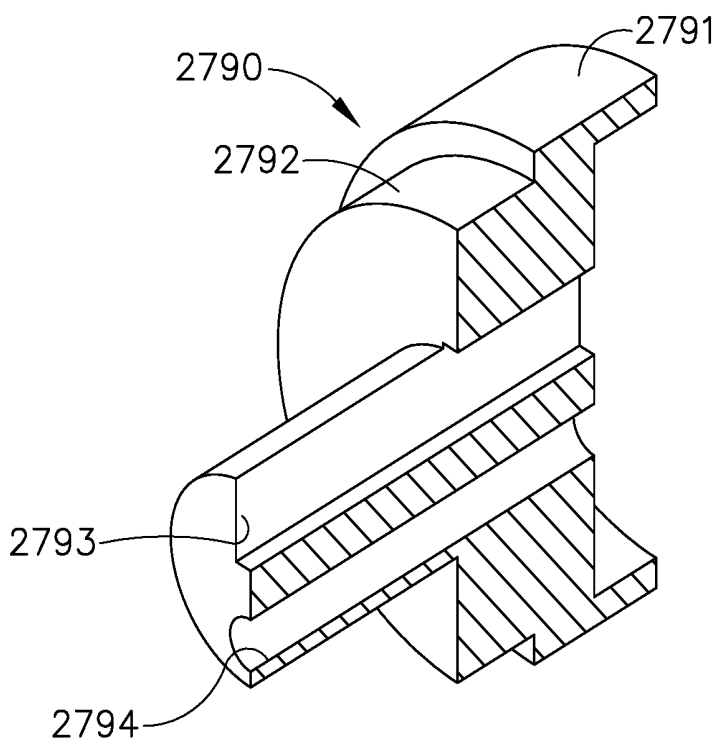


FIG. 54

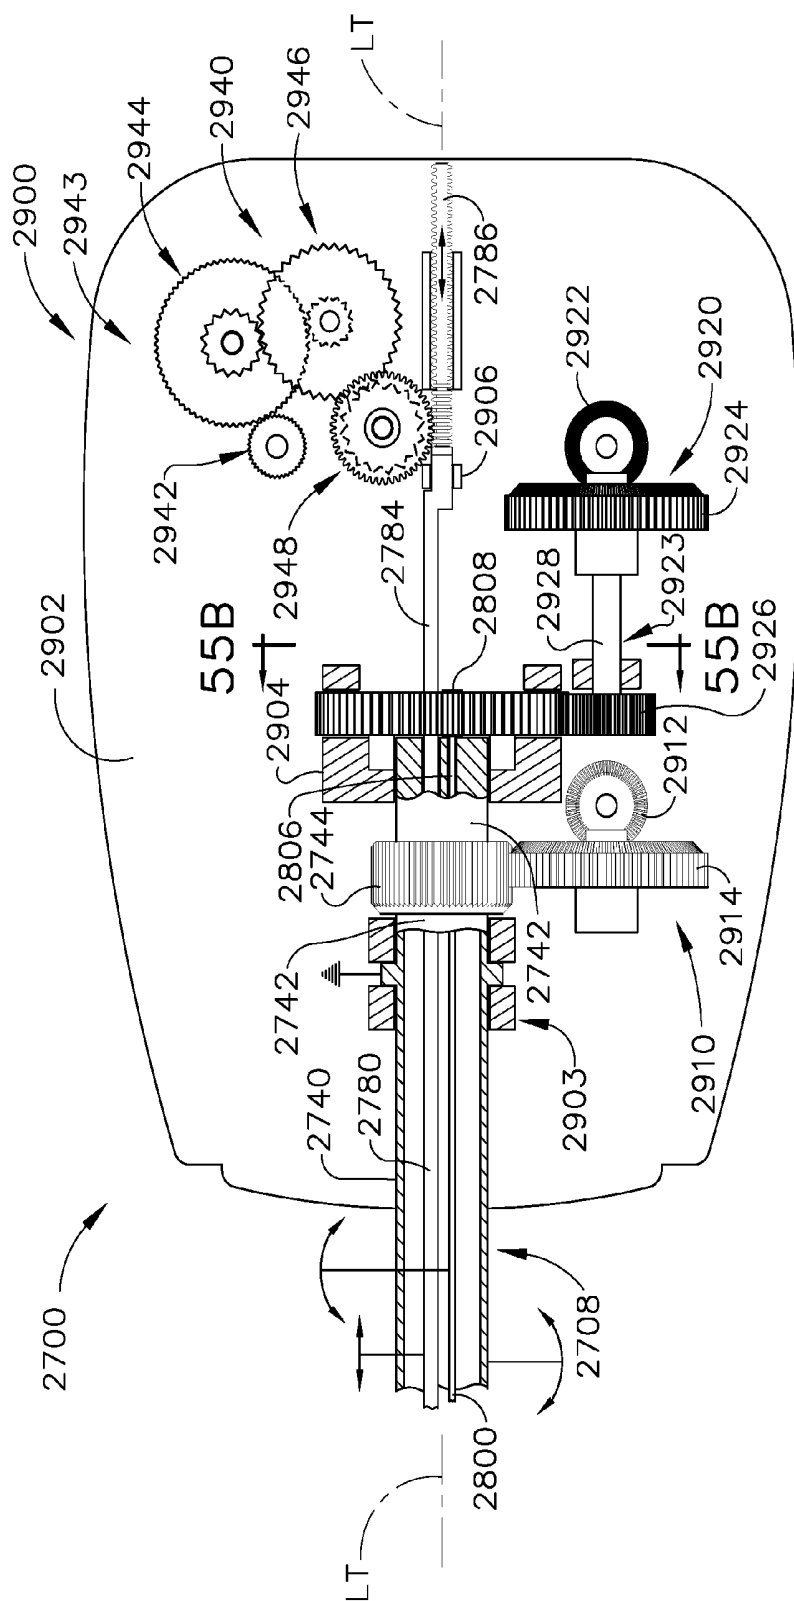


FIG. 55

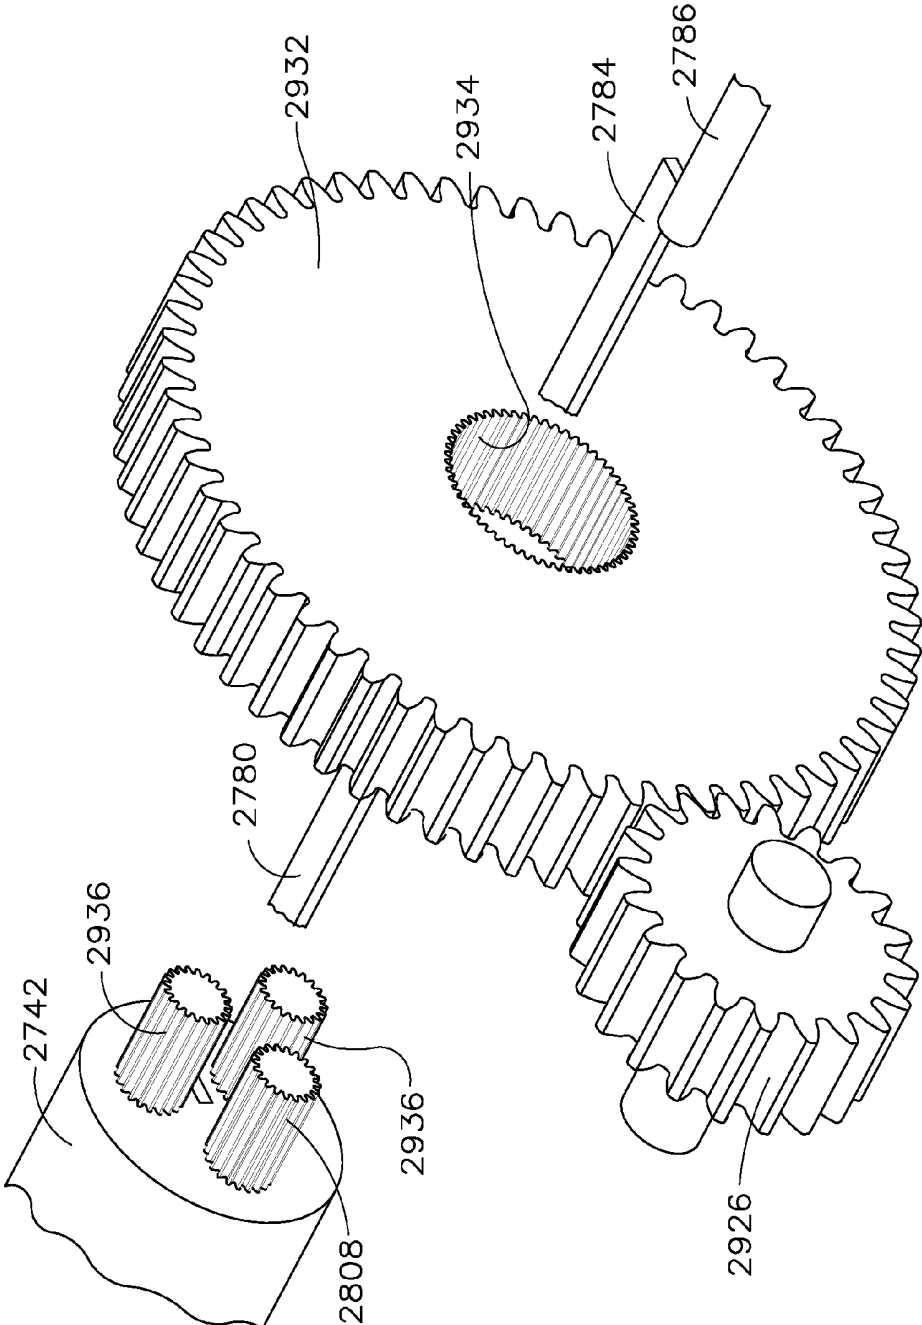


FIG. 55A

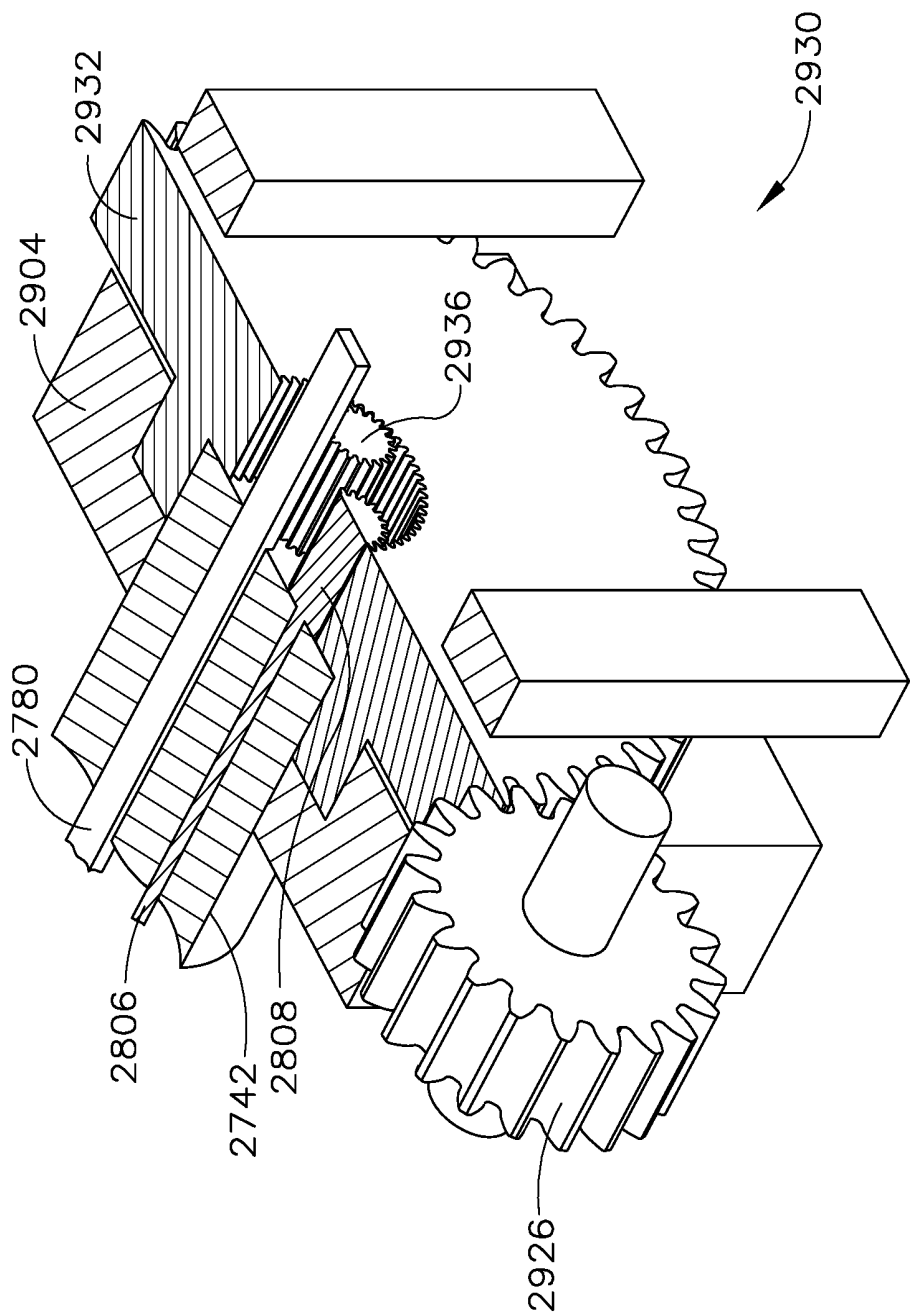


FIG. 55B

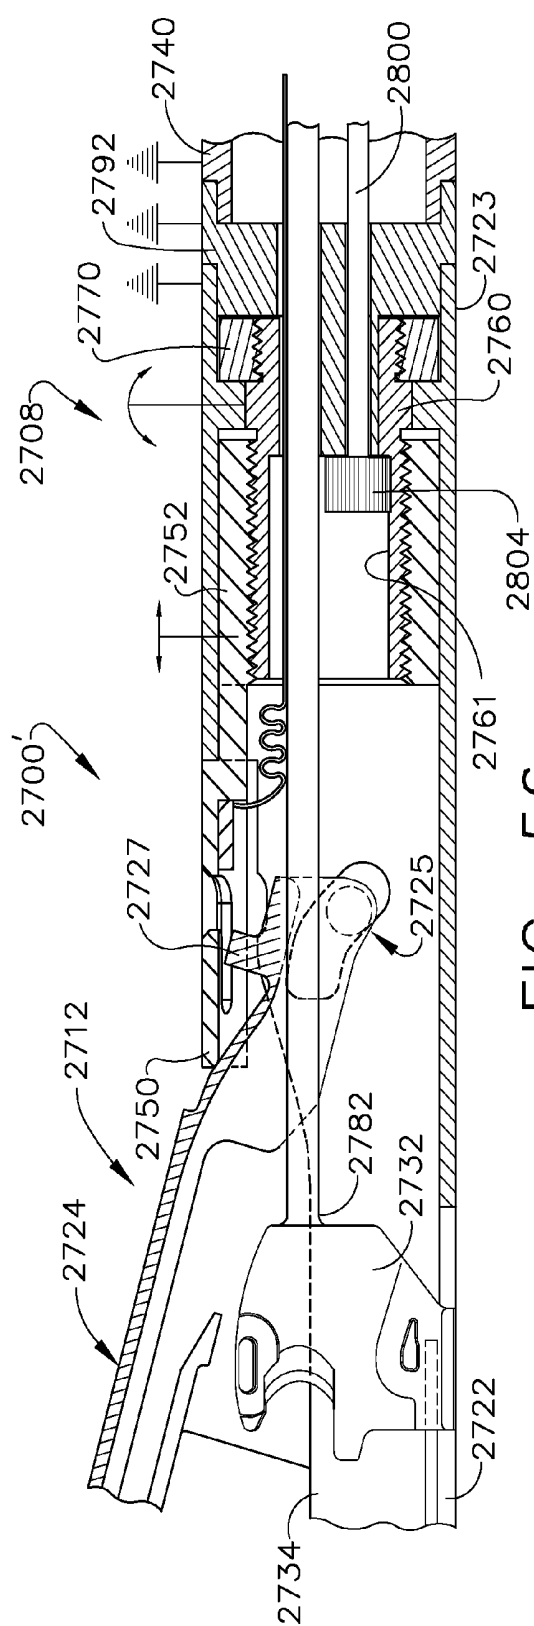


FIG. 56

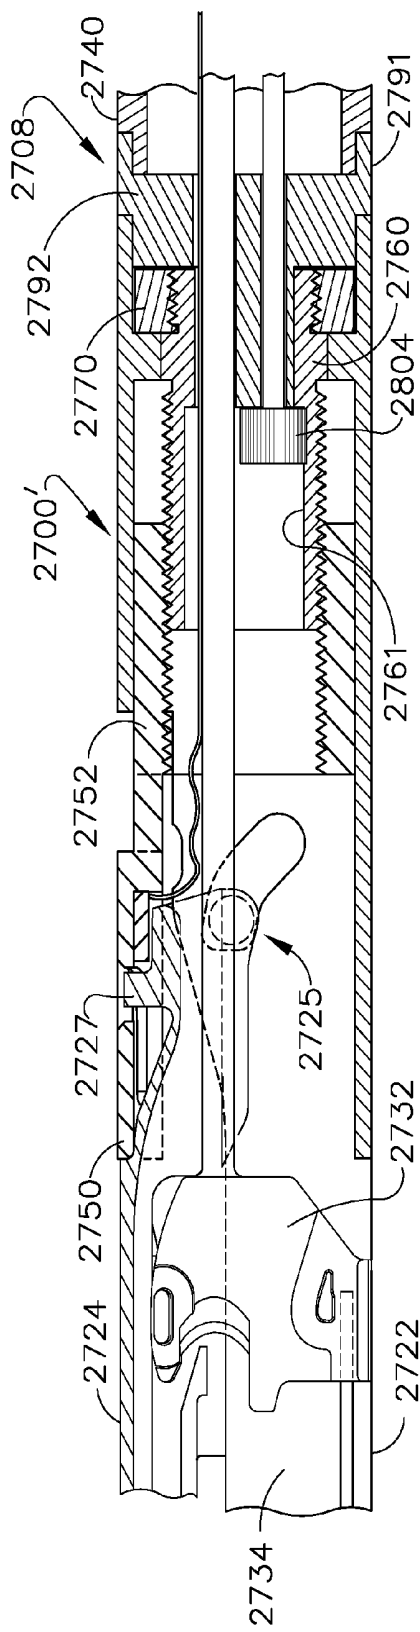


FIG. 57

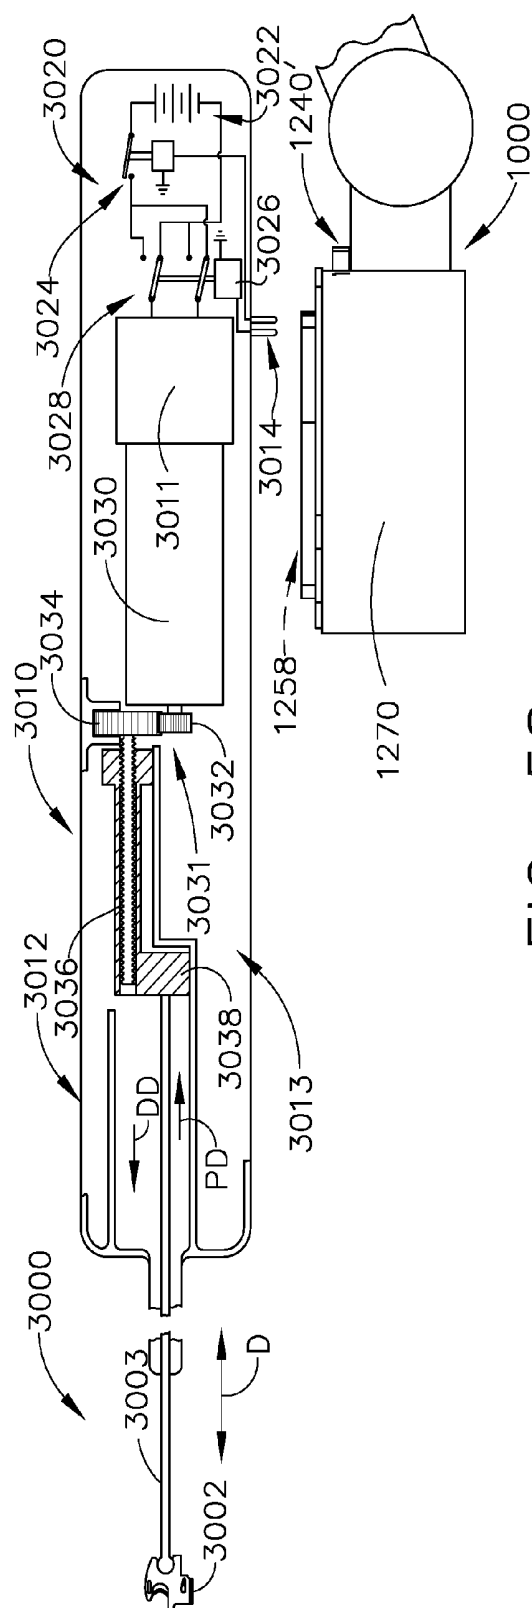


FIG. 58

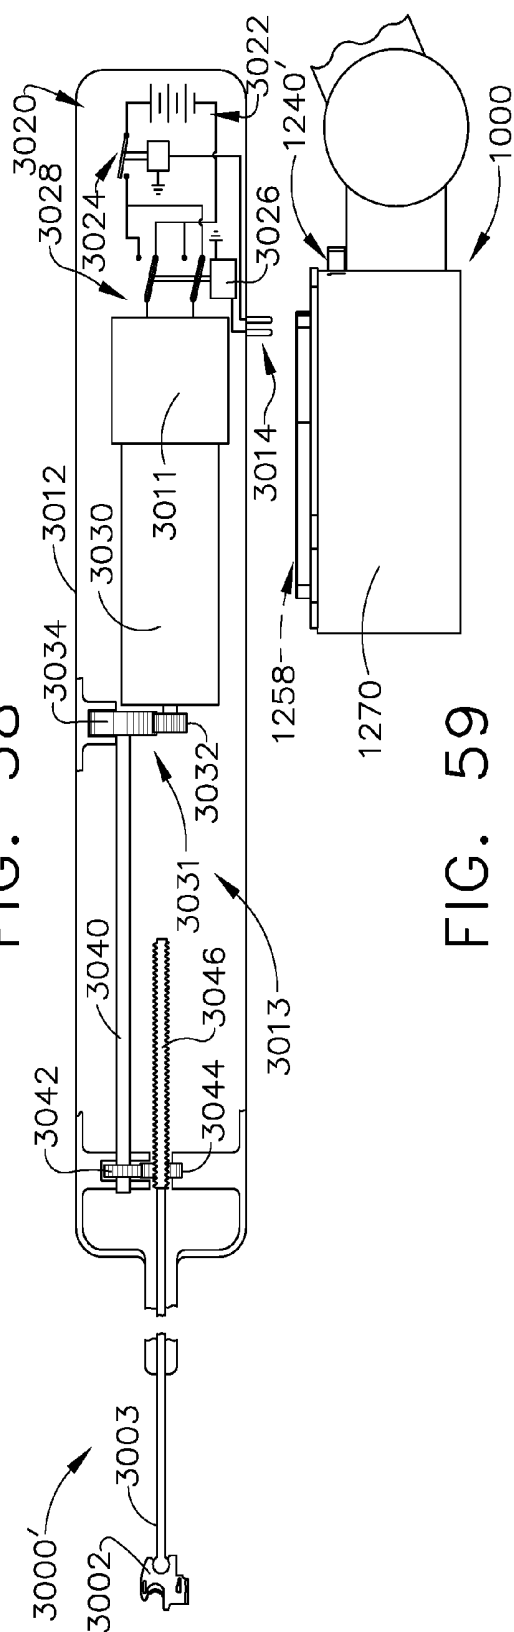


FIG. 59

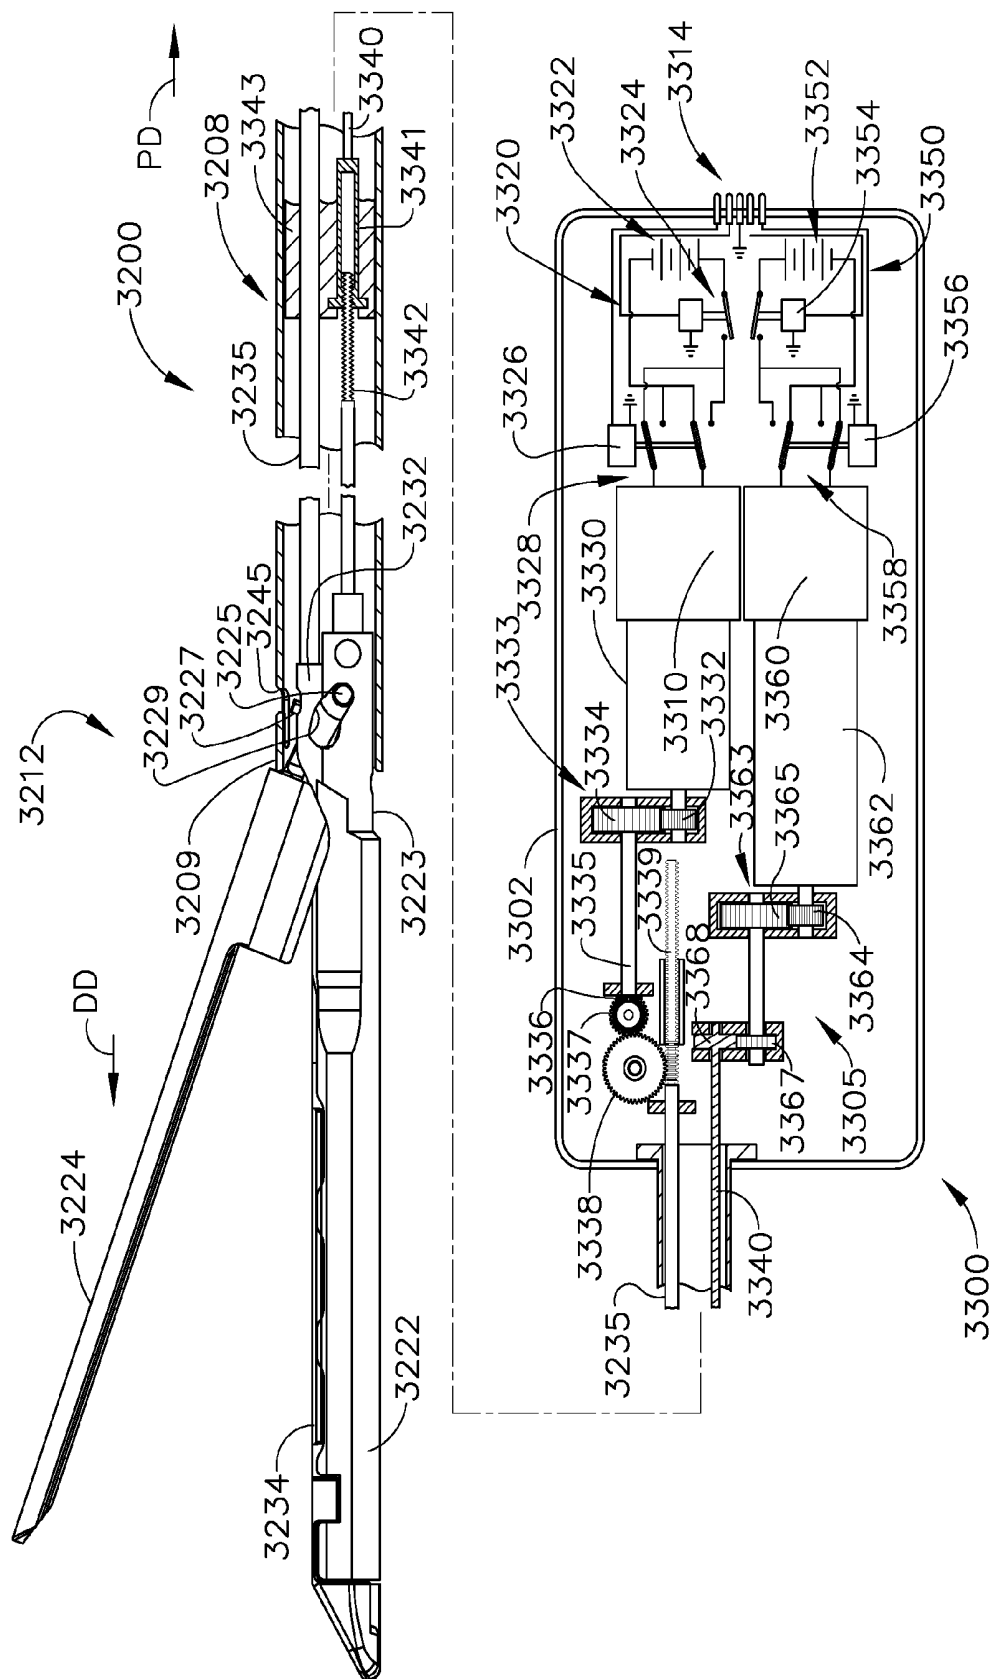


FIG. 60

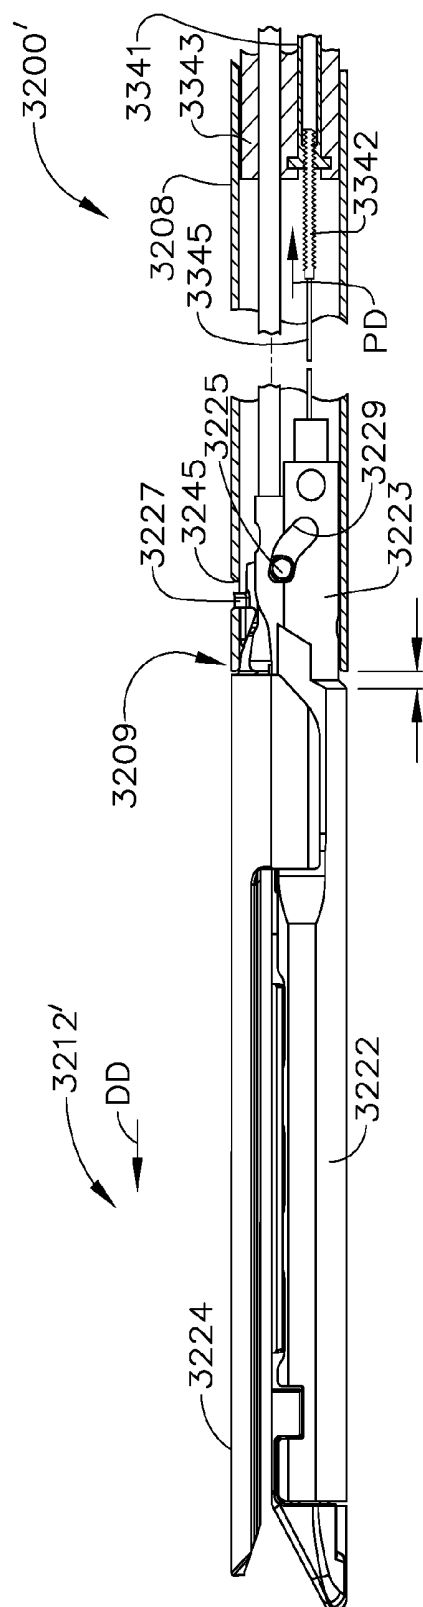


FIG. 61

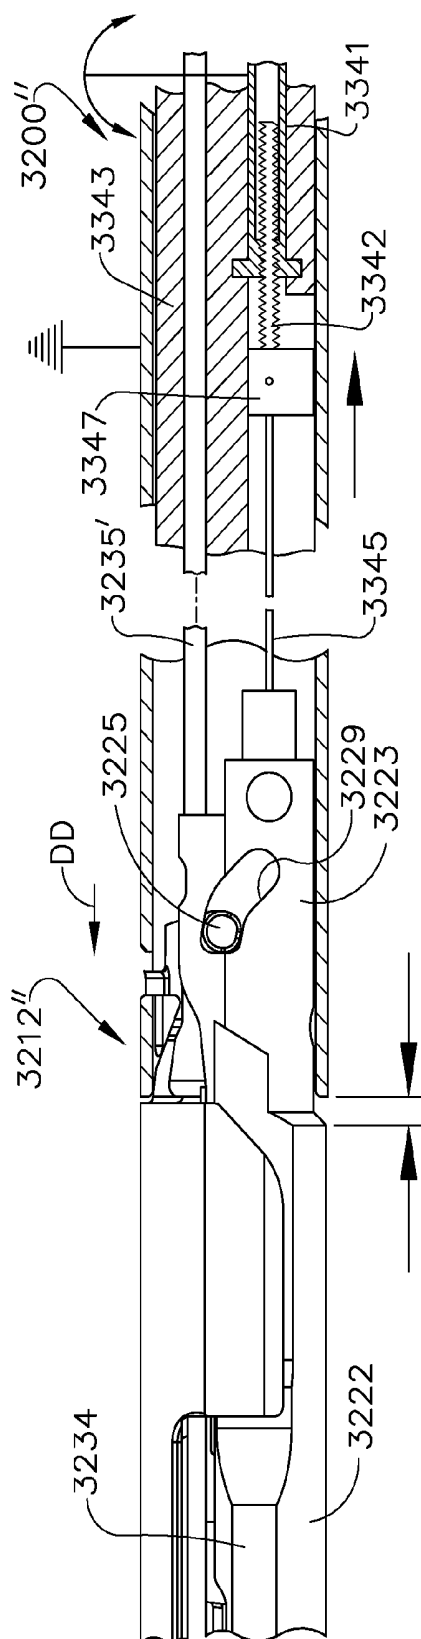


FIG. 62

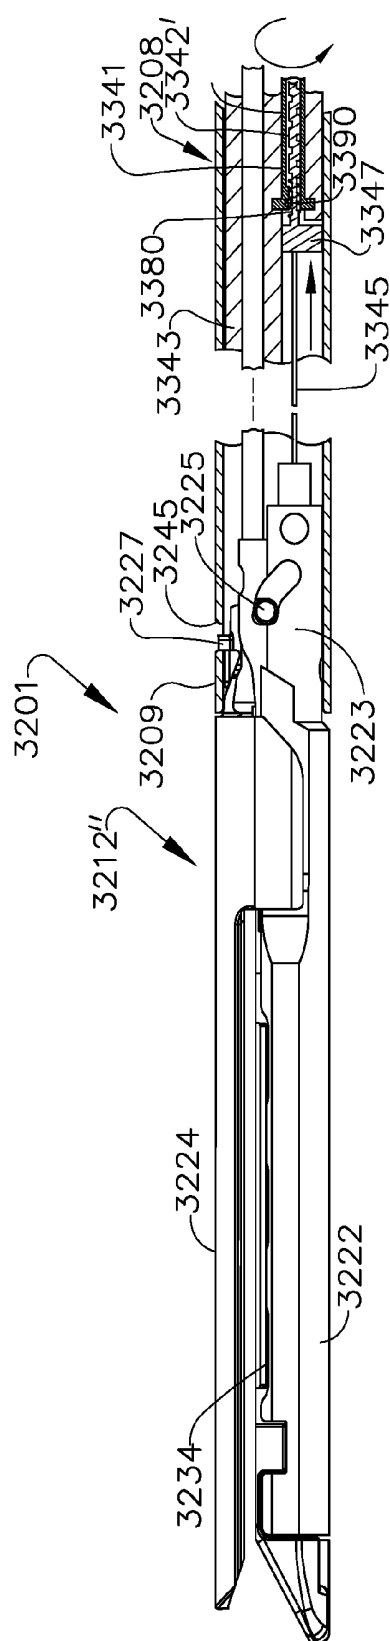


FIG. 63

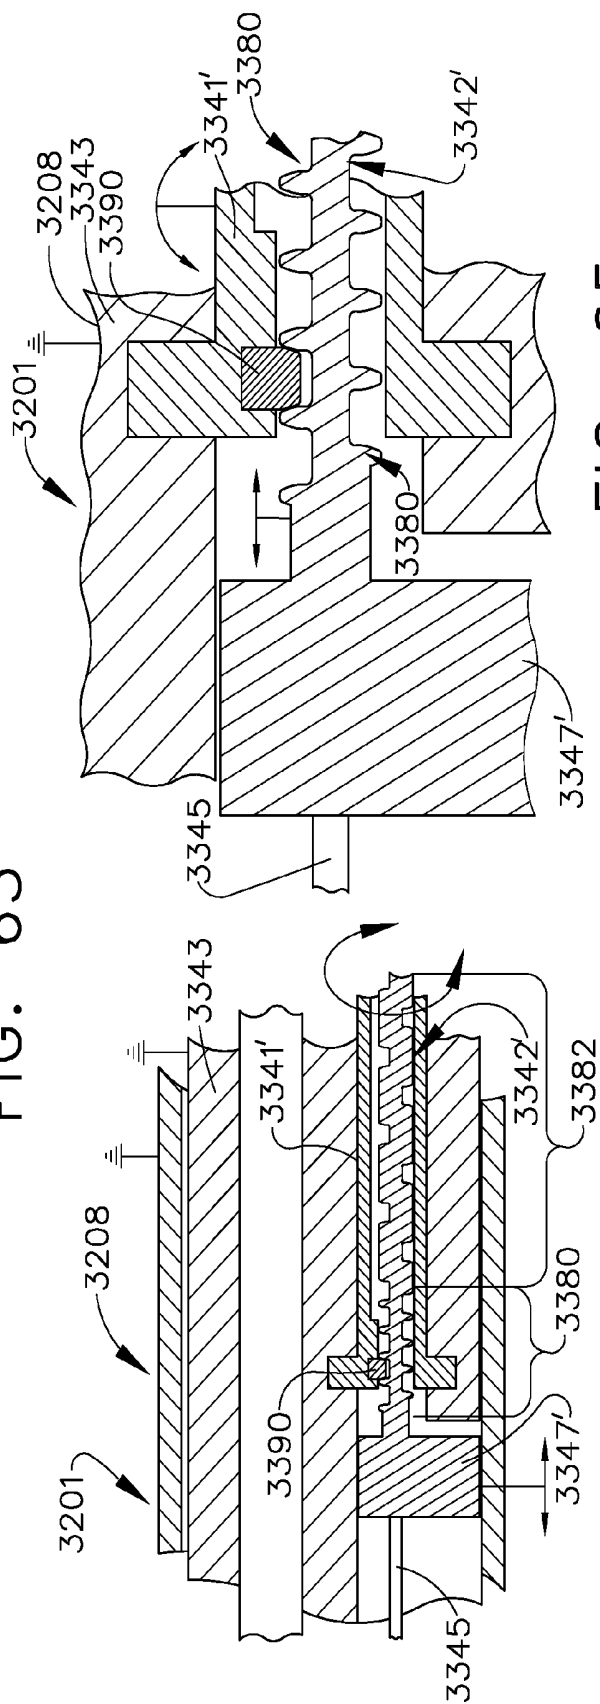


FIG. 64

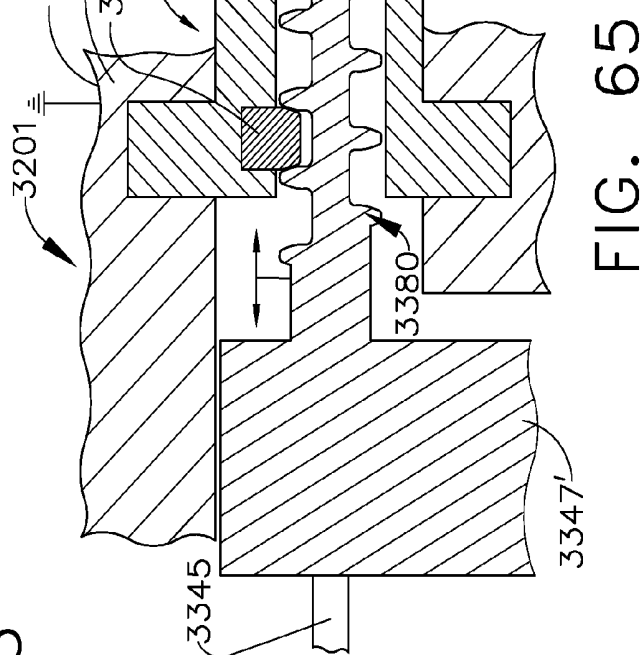


FIG. 65

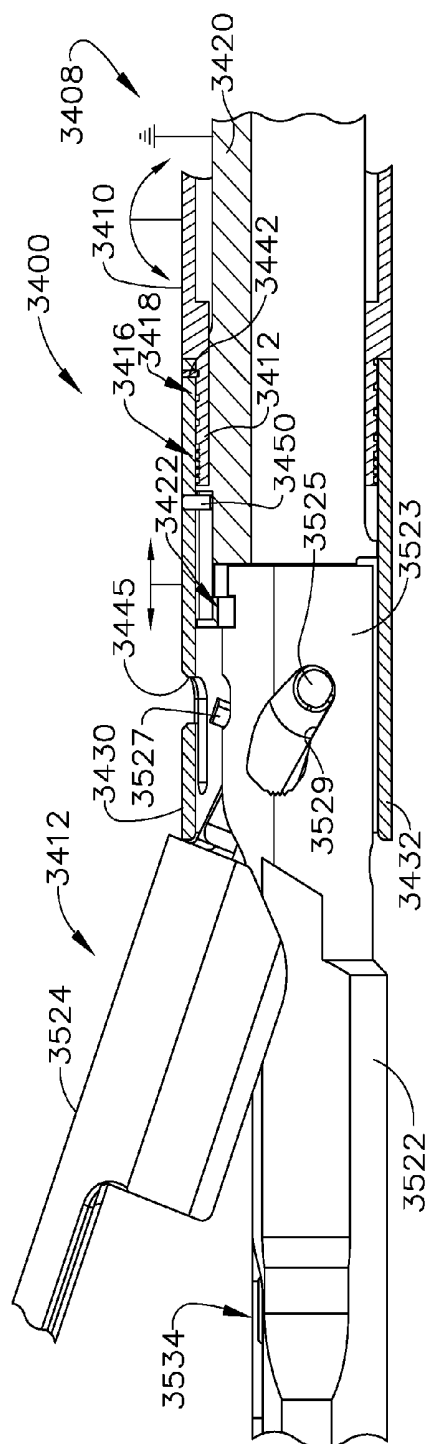


FIG. 66

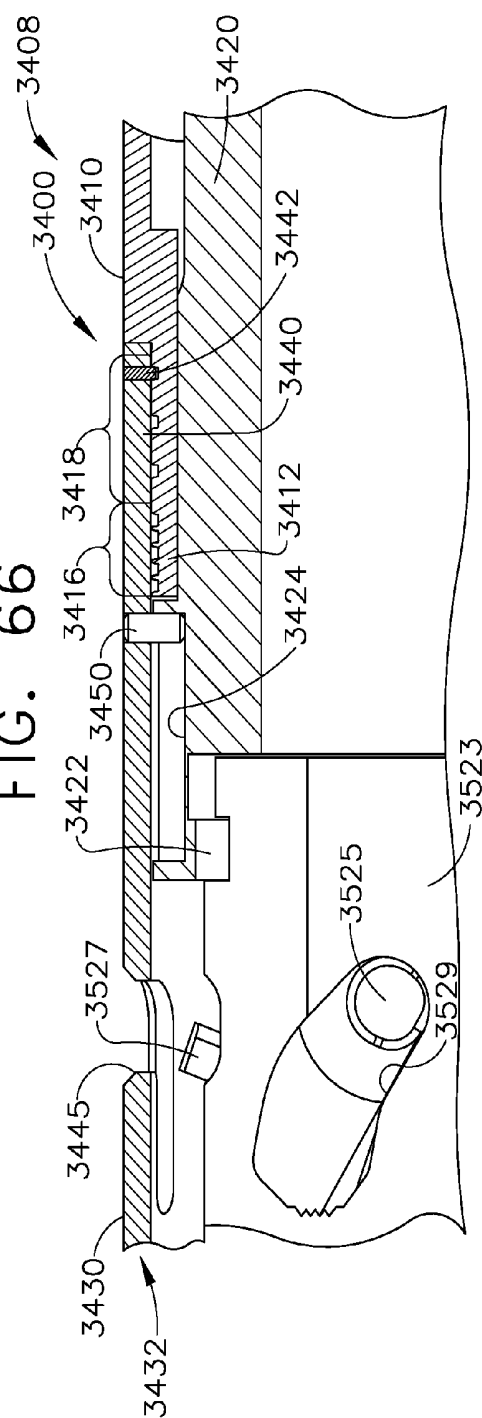


FIG. 67

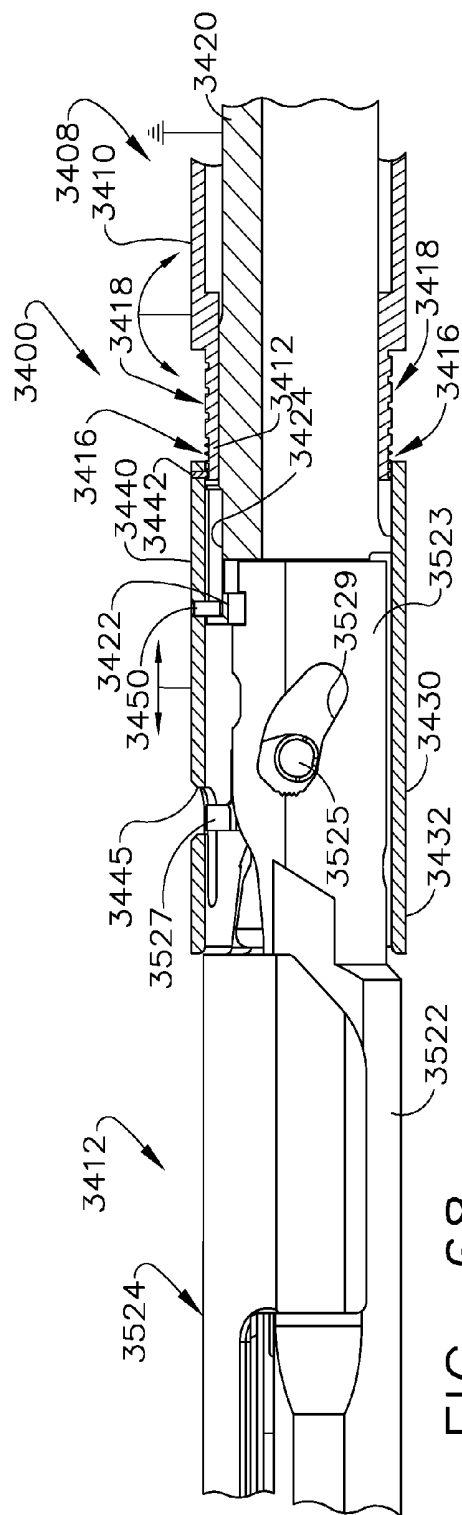


FIG. 68

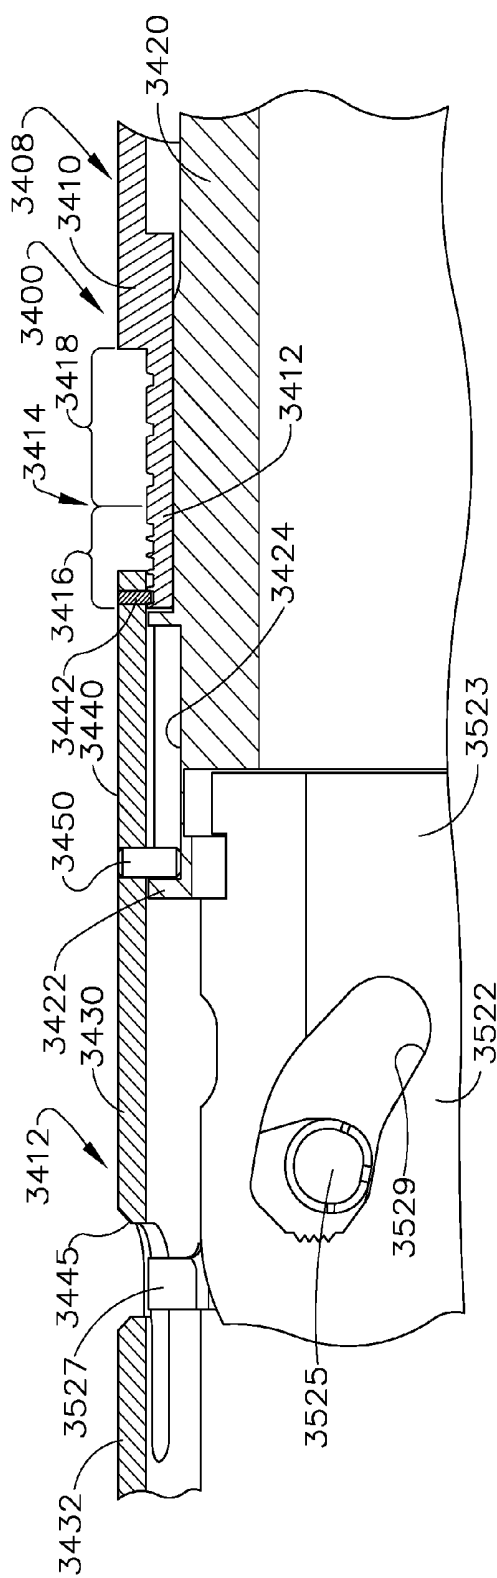


FIG. 69

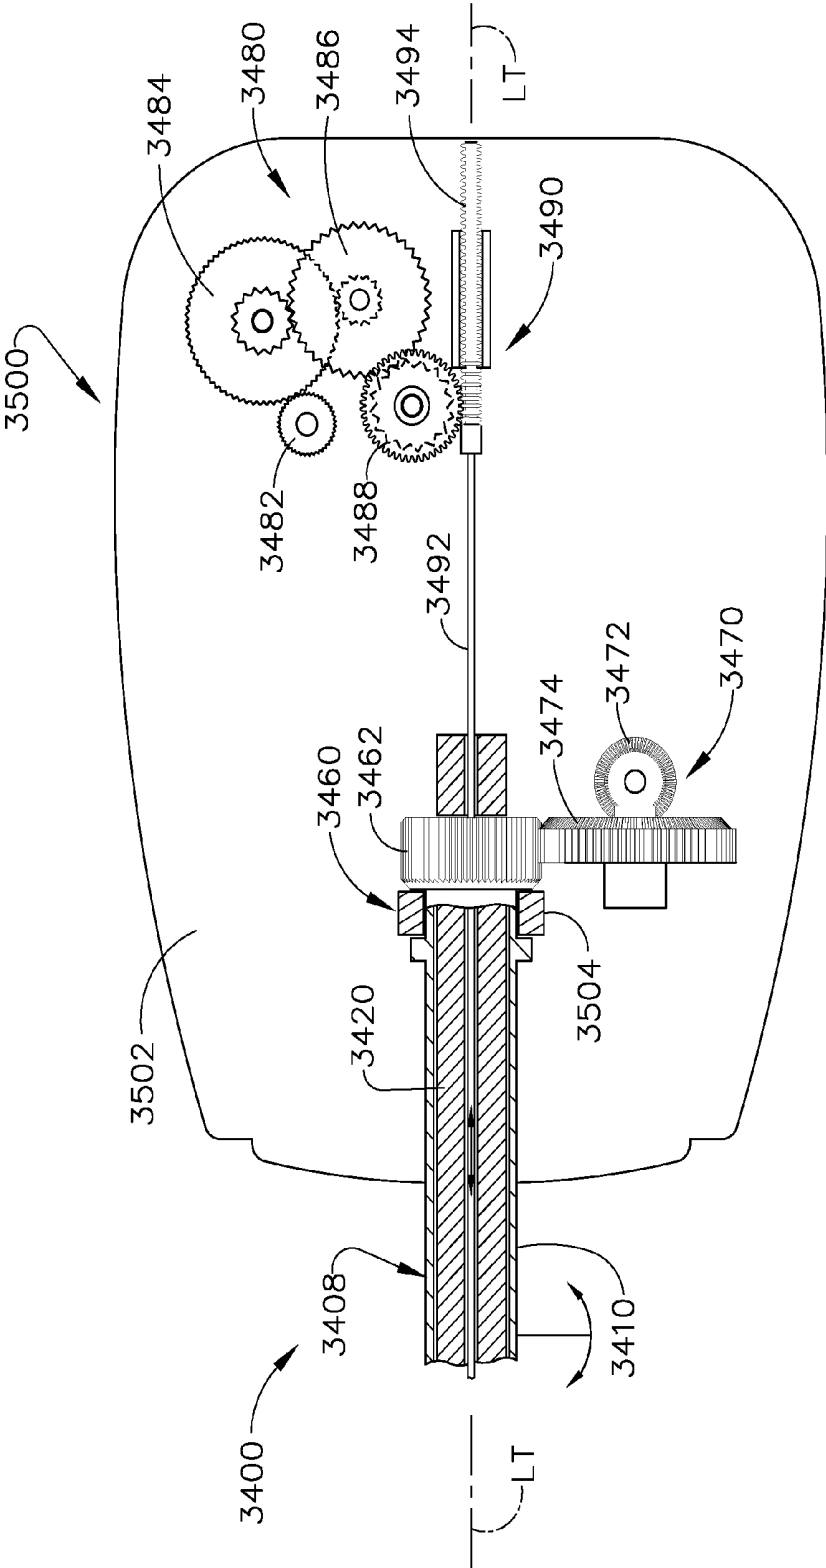
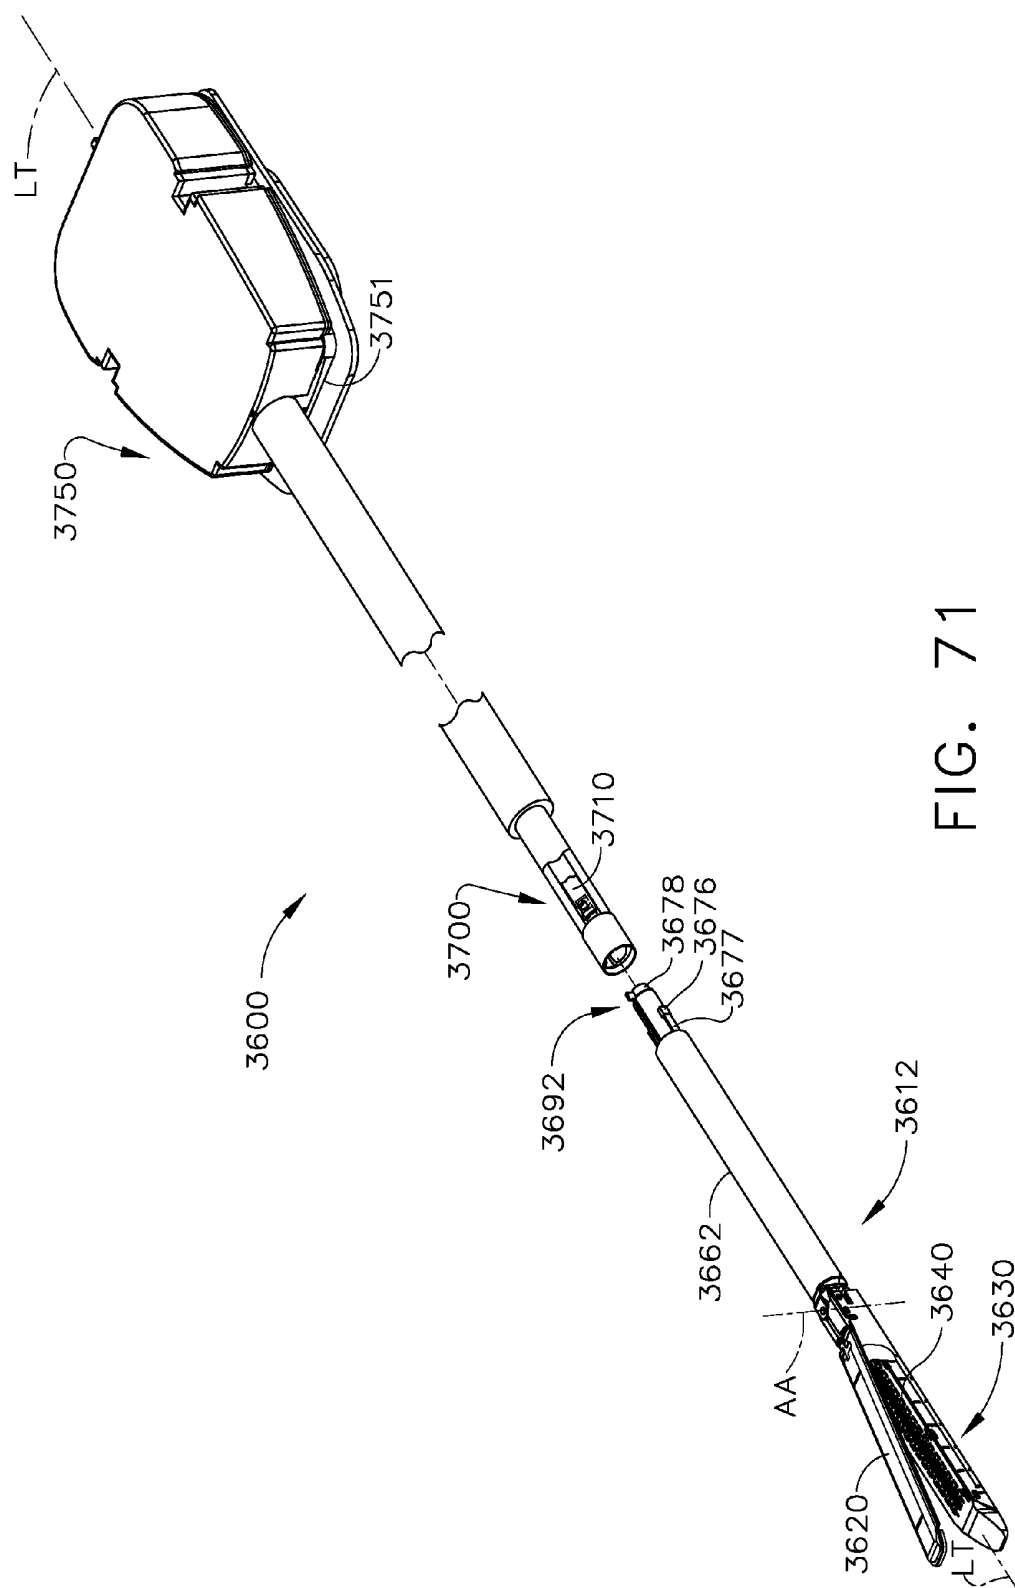


FIG. 70



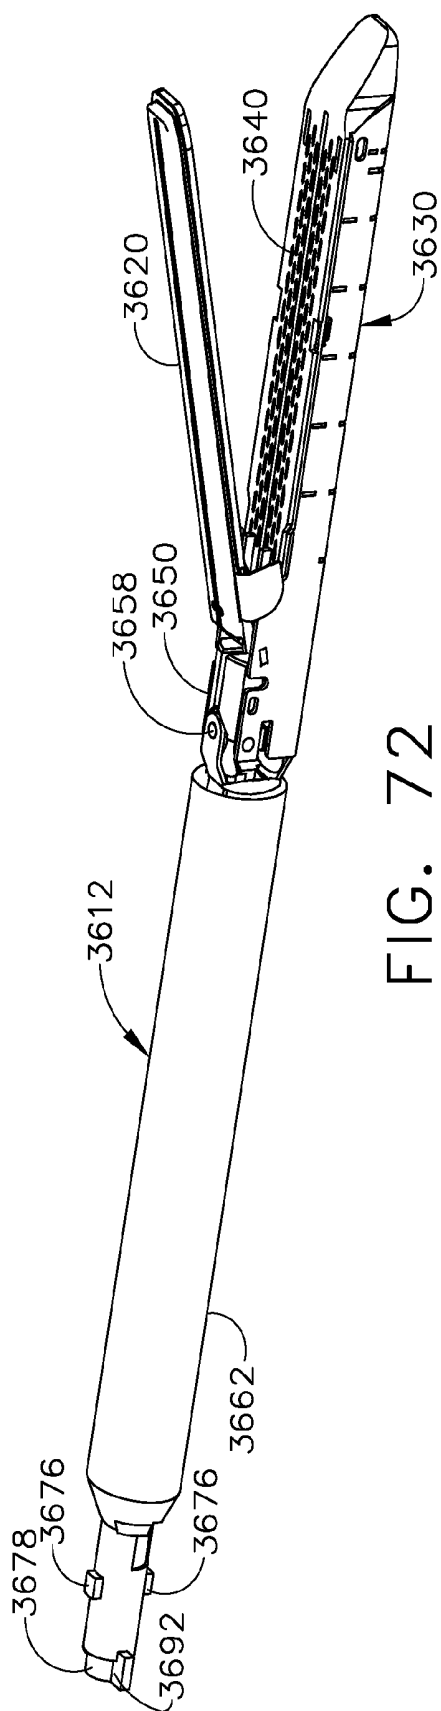


FIG. 72

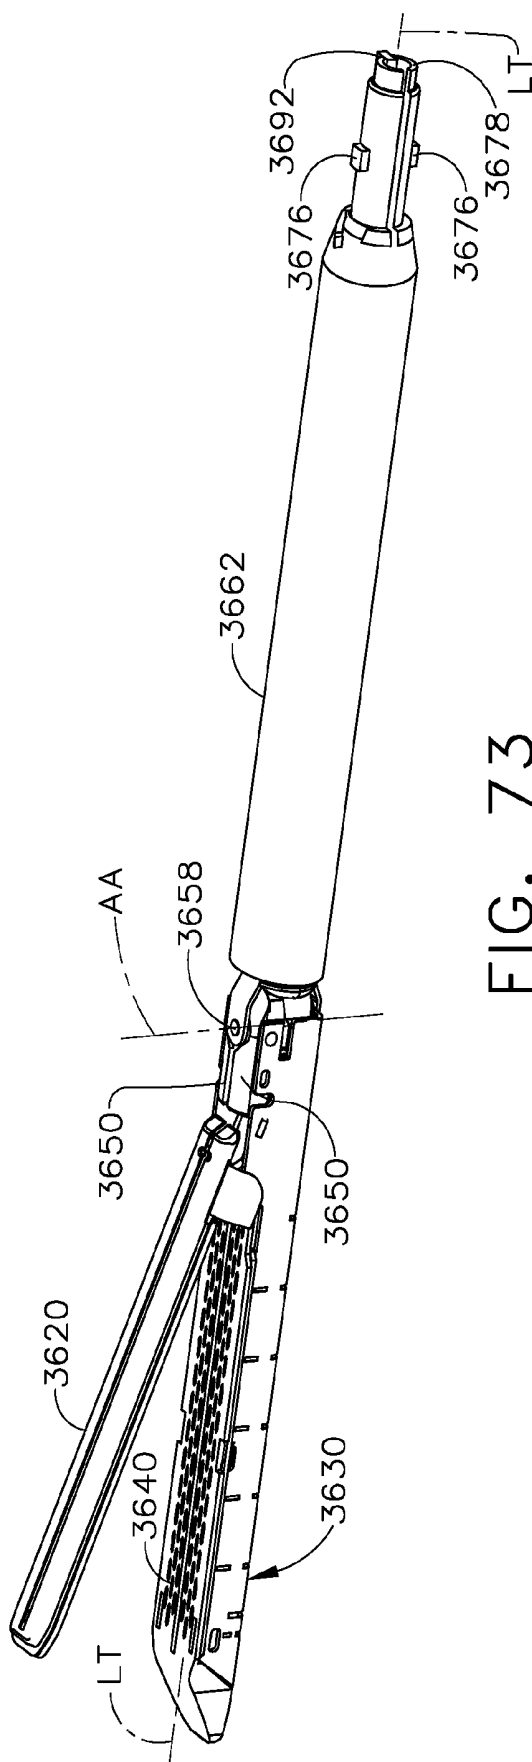


FIG. 73

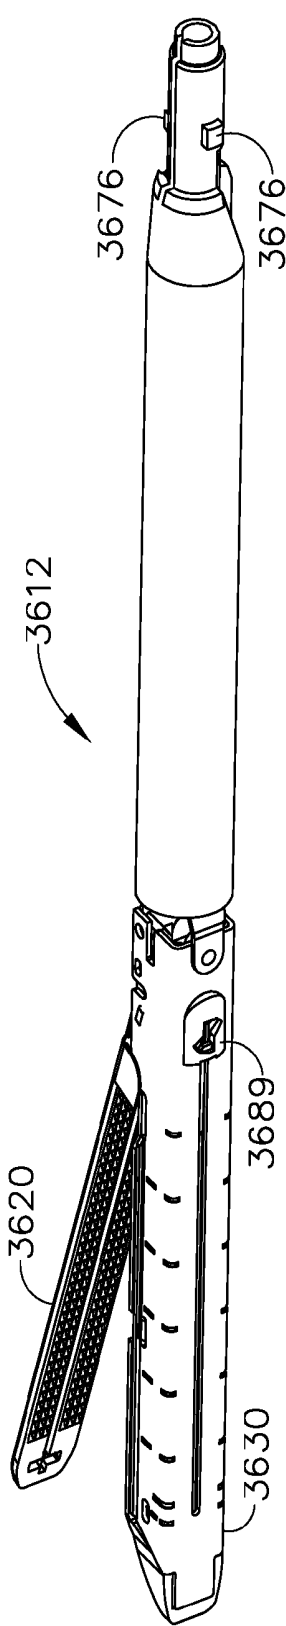


FIG. 74

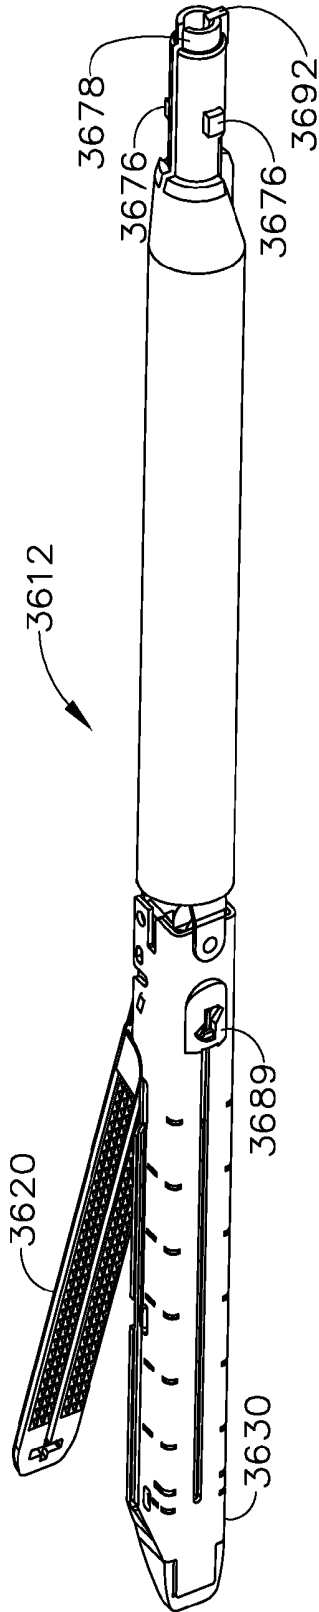


FIG. 75

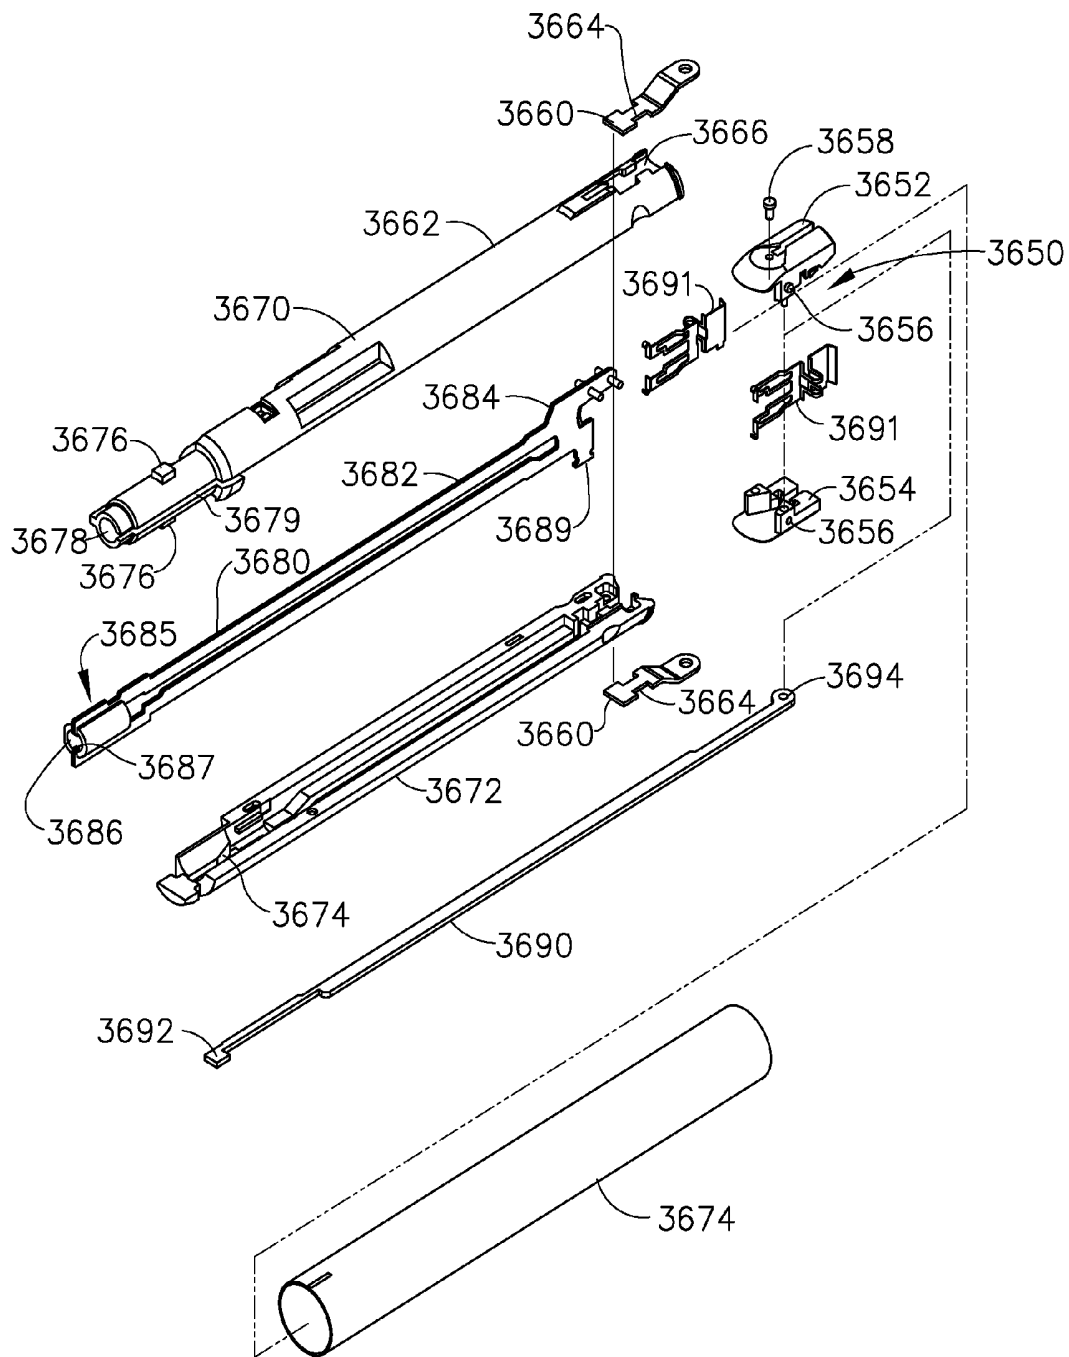
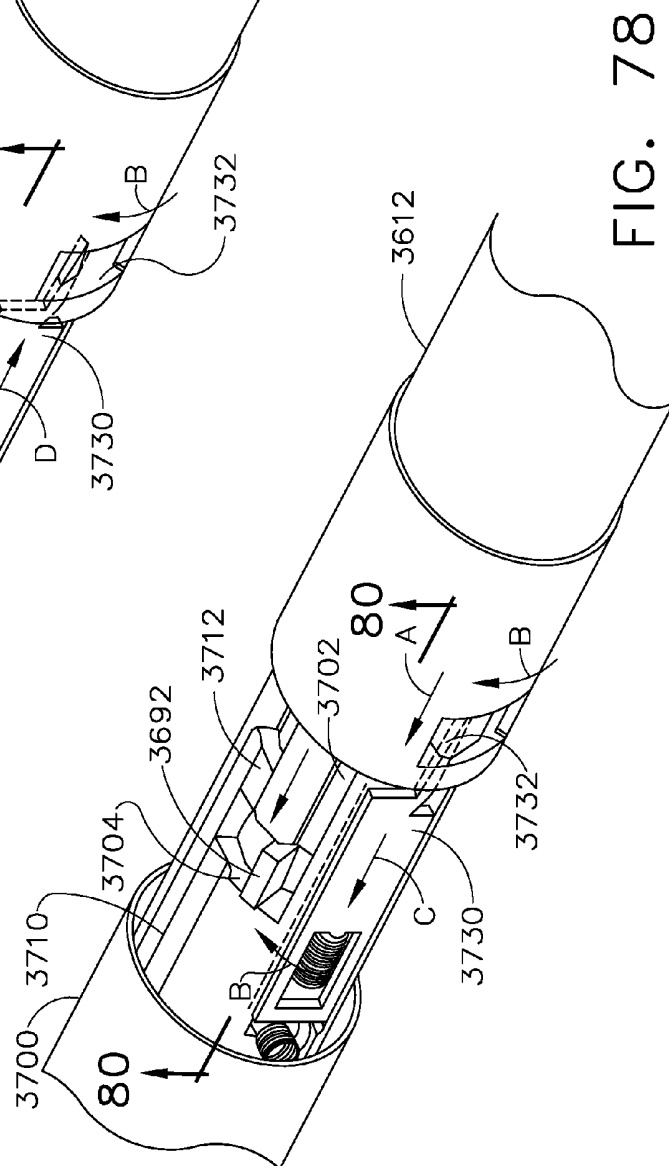
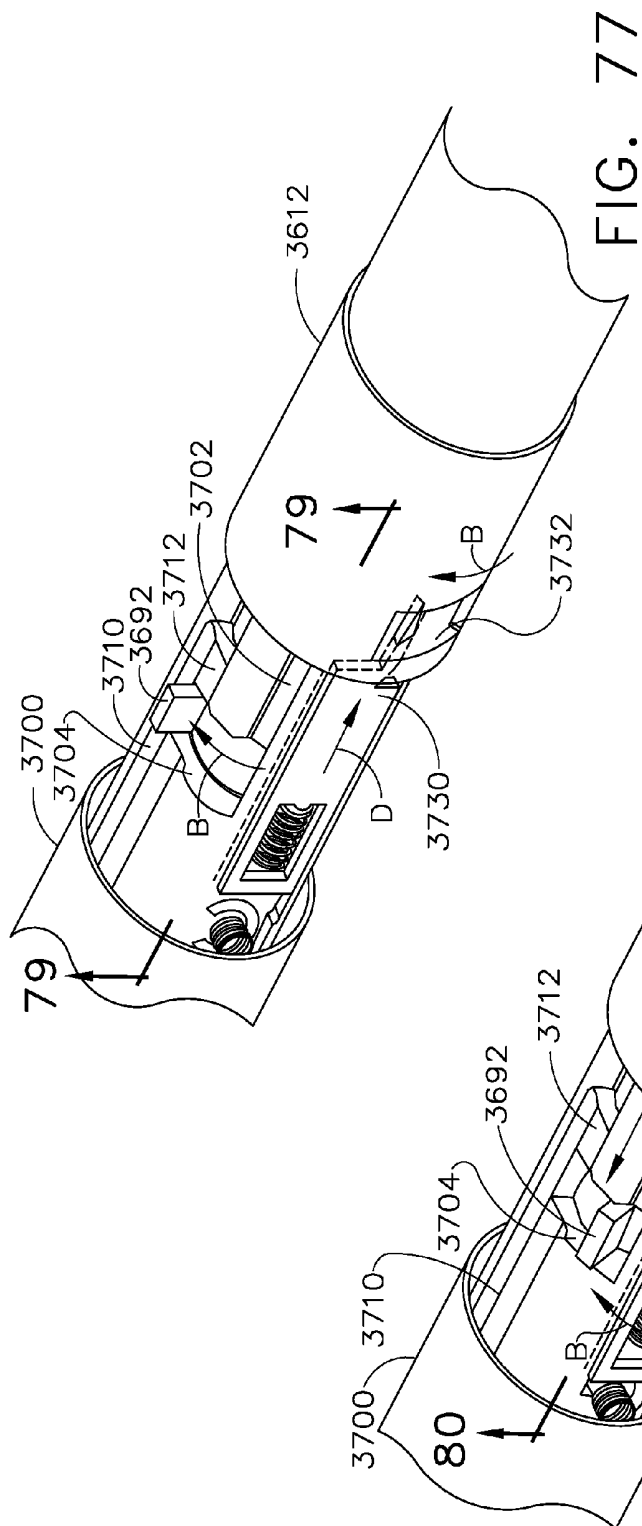


FIG. 76



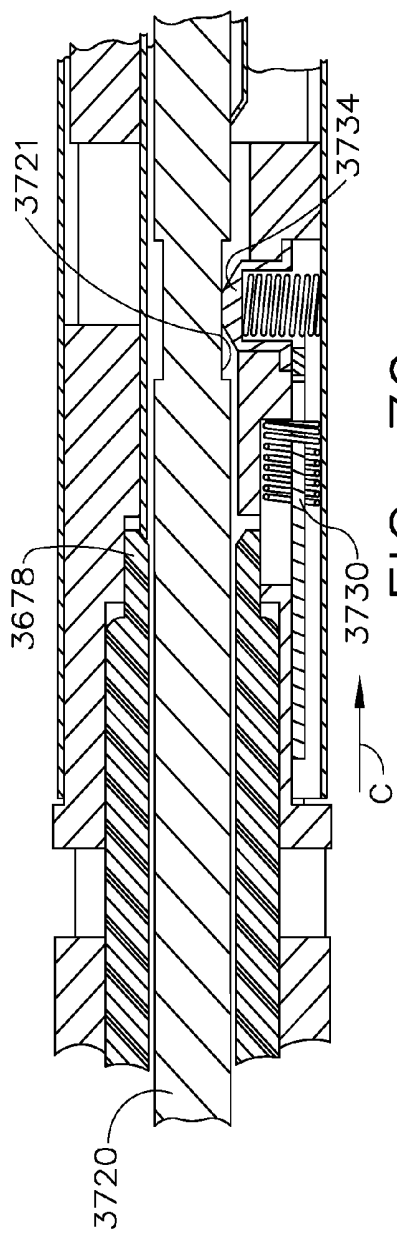


FIG. 79

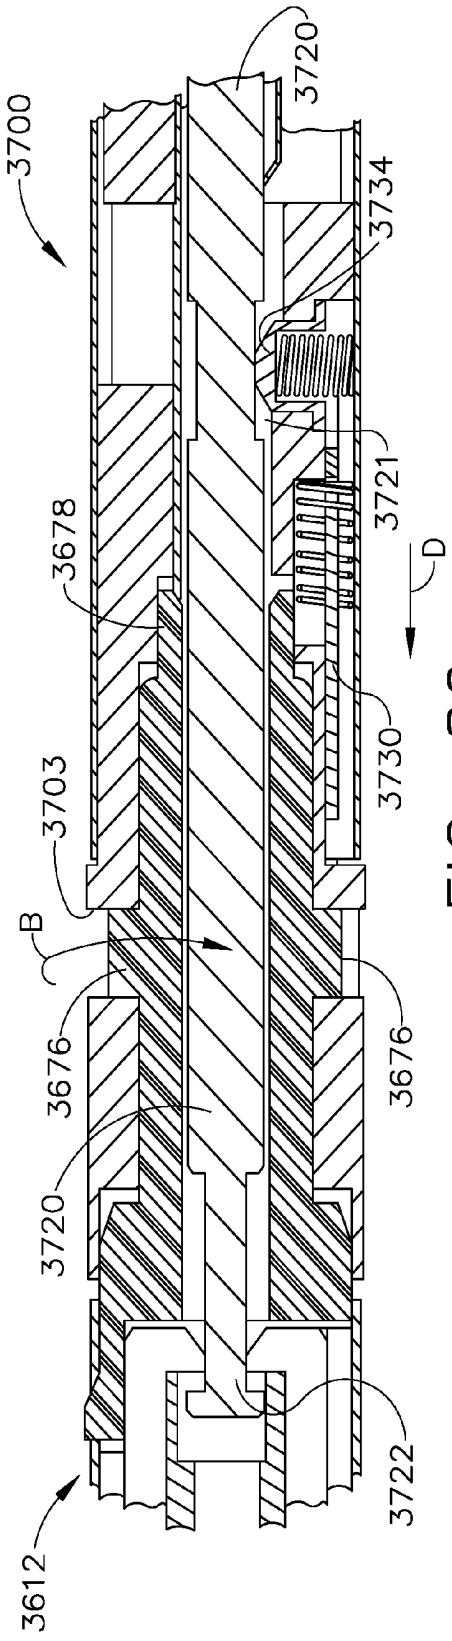


FIG. 80

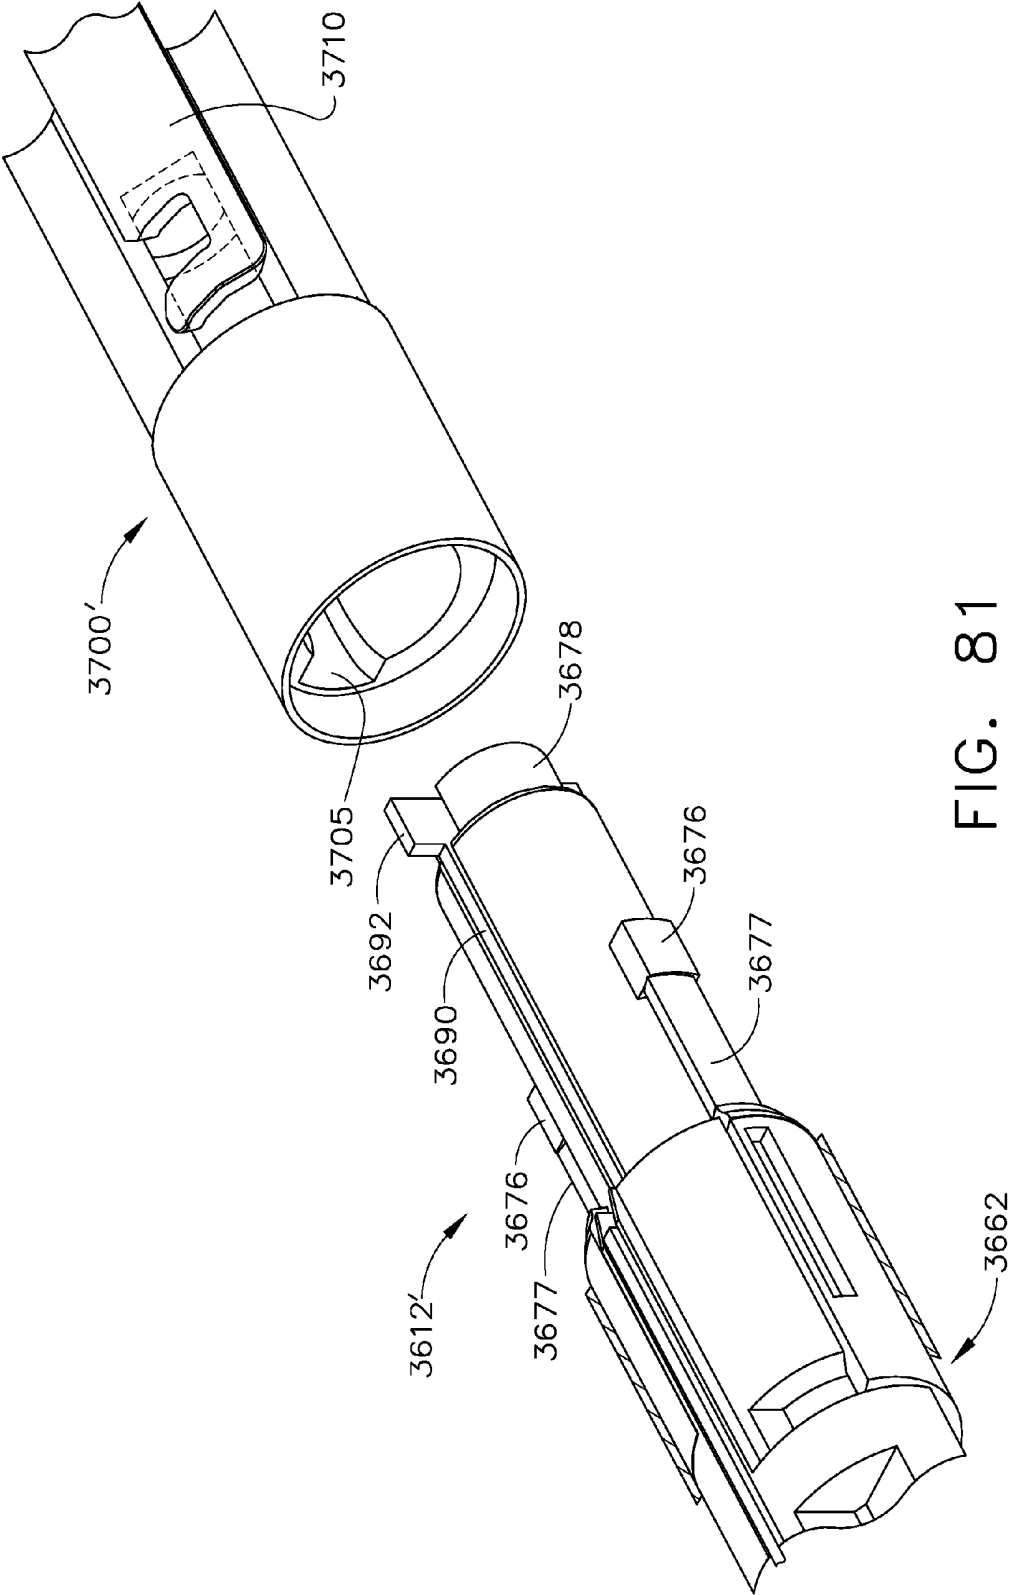


FIG. 81

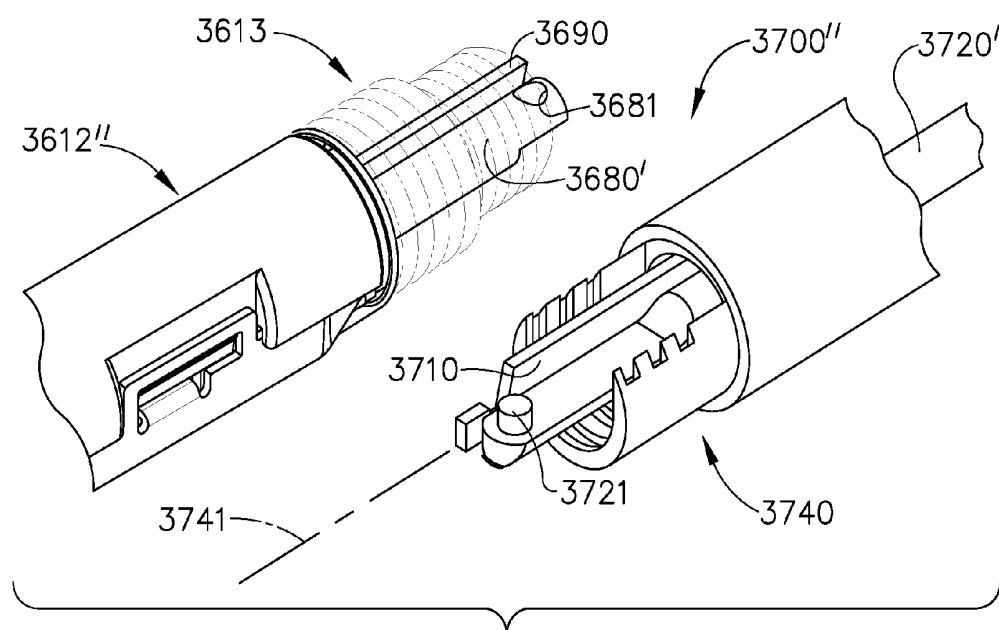


FIG. 82

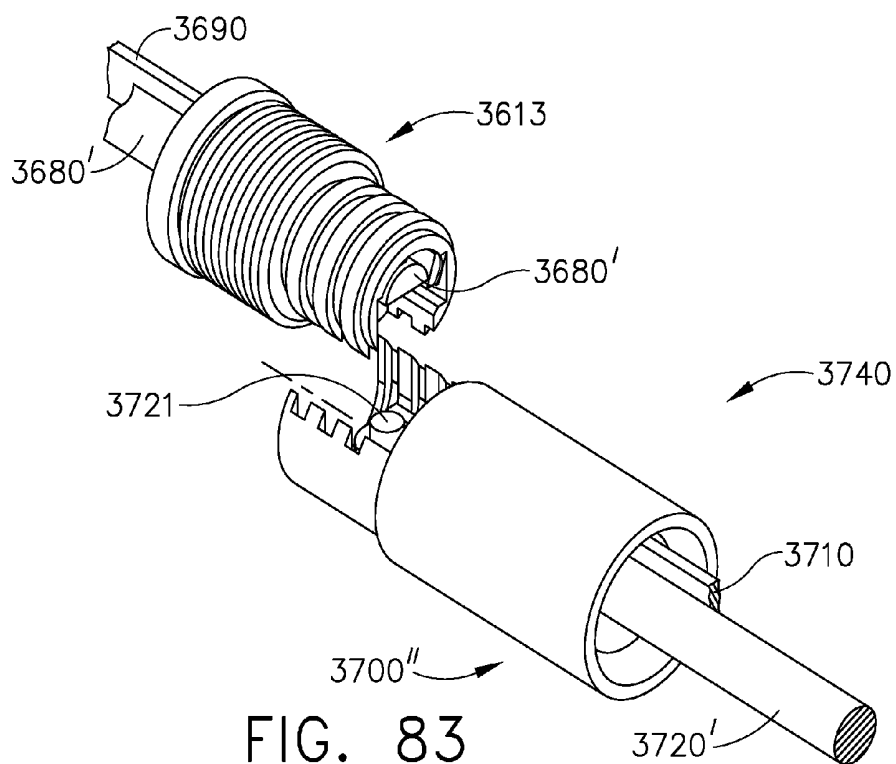


FIG. 83

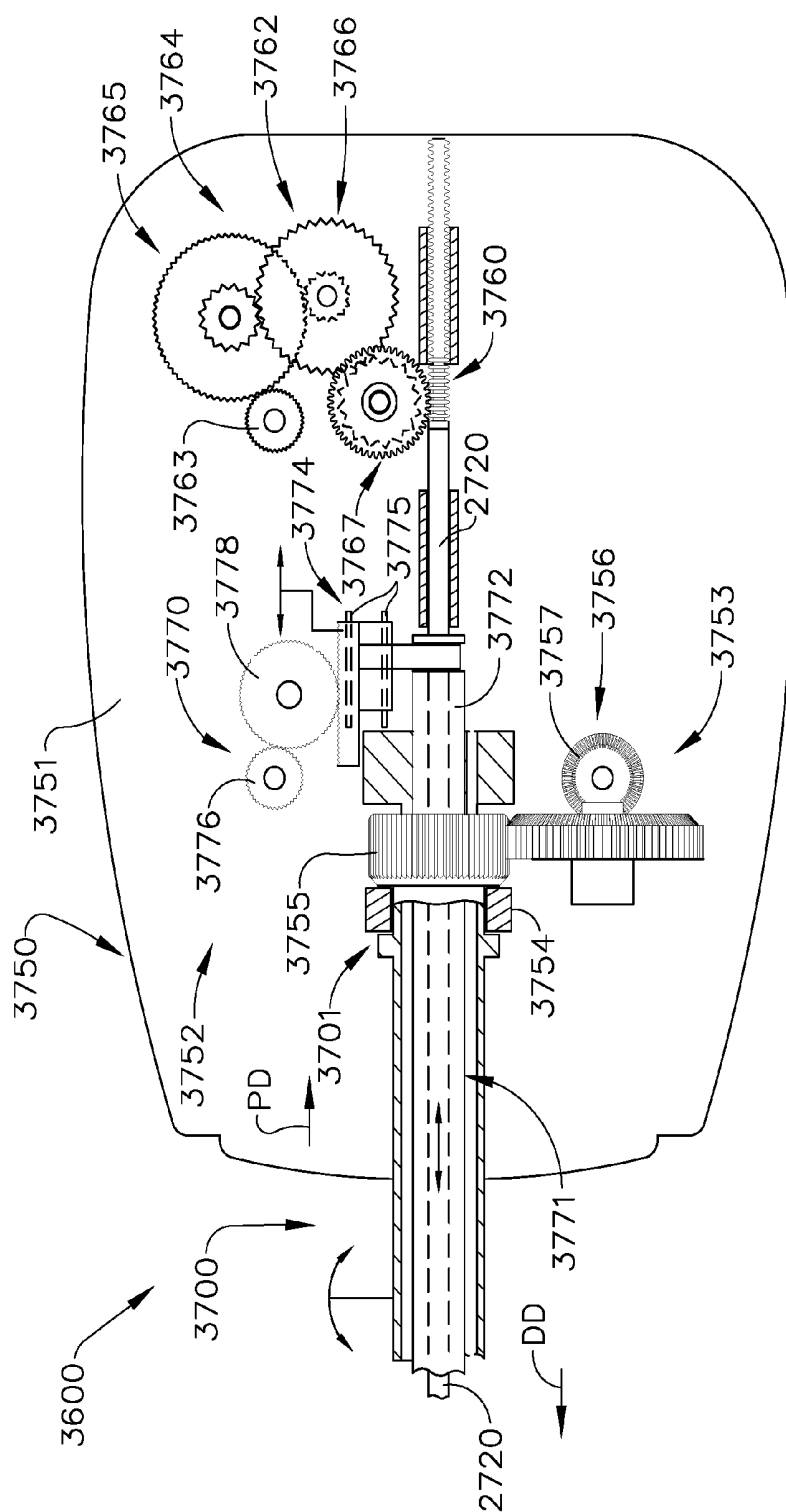


FIG. 84

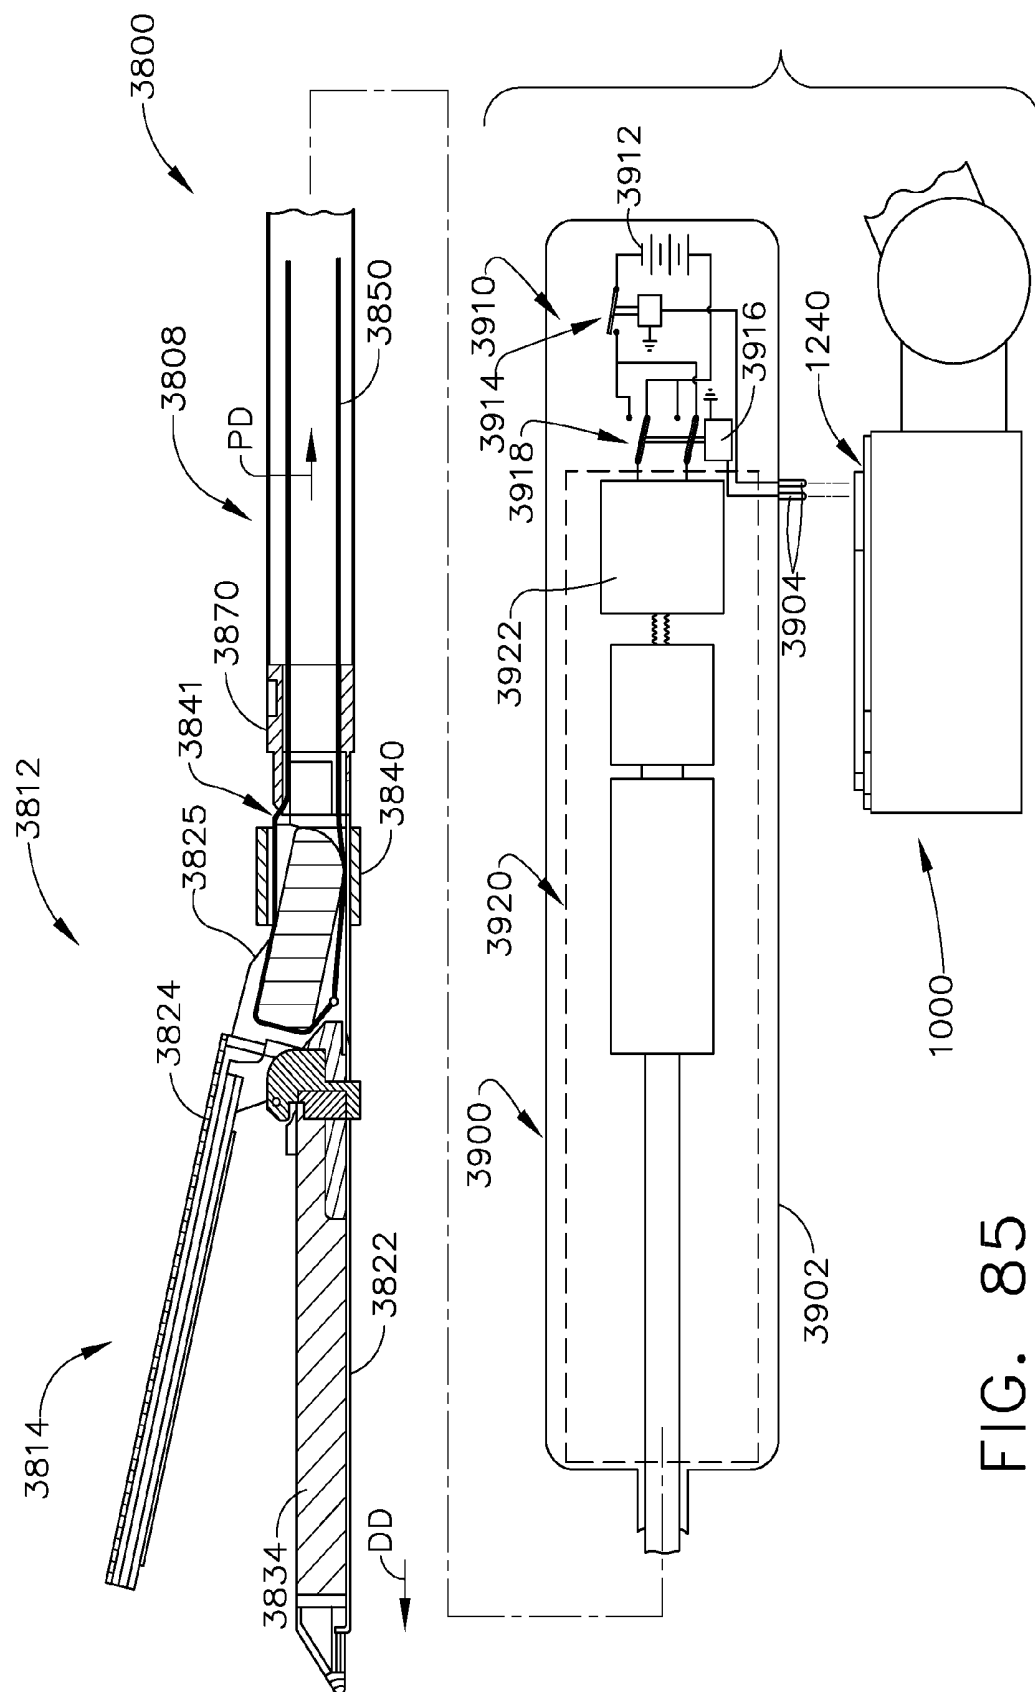


FIG. 85

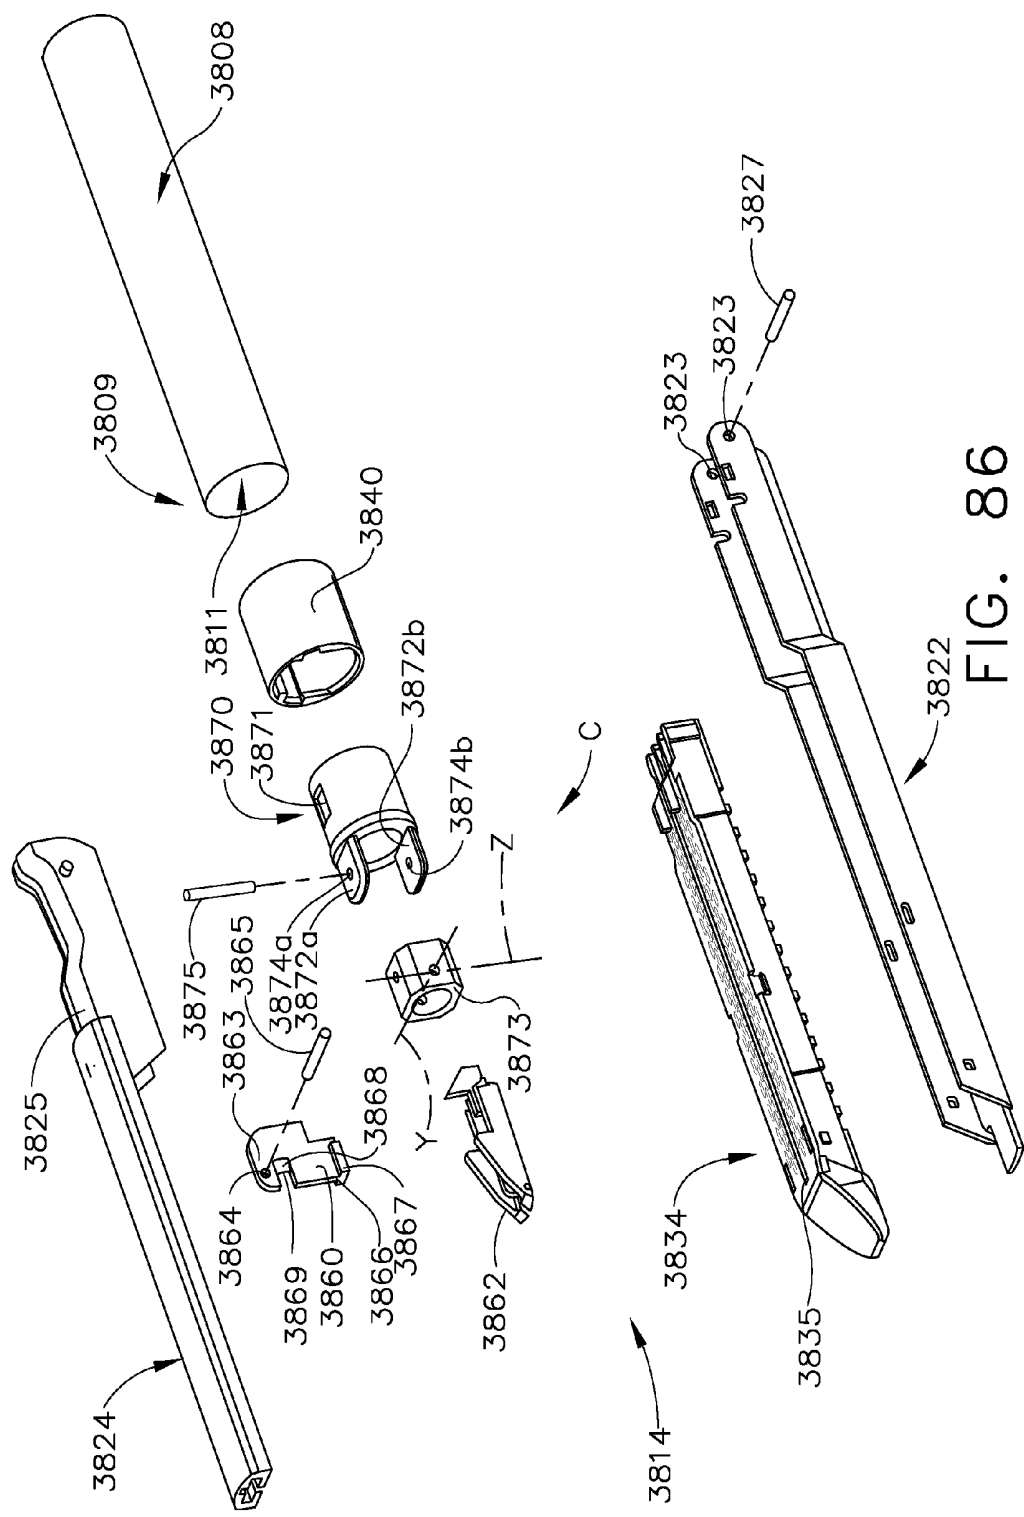
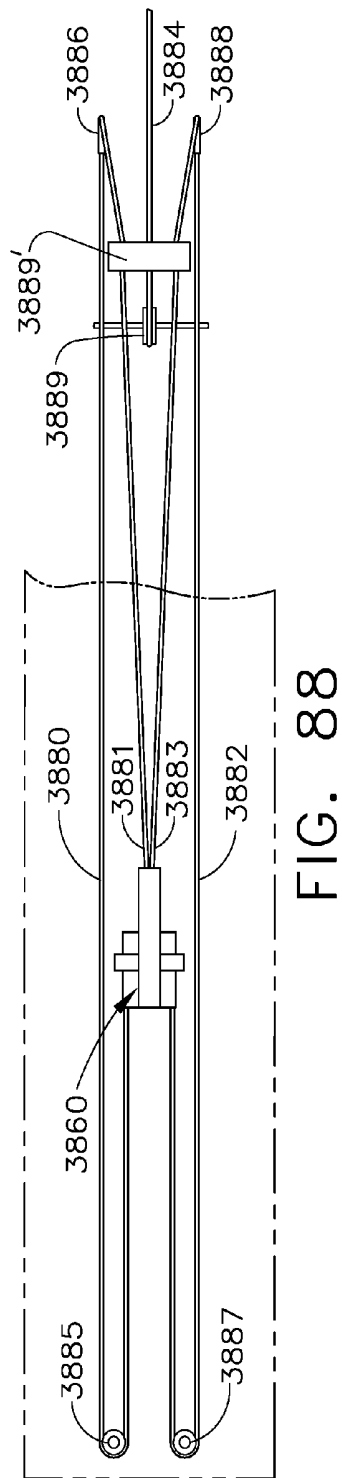
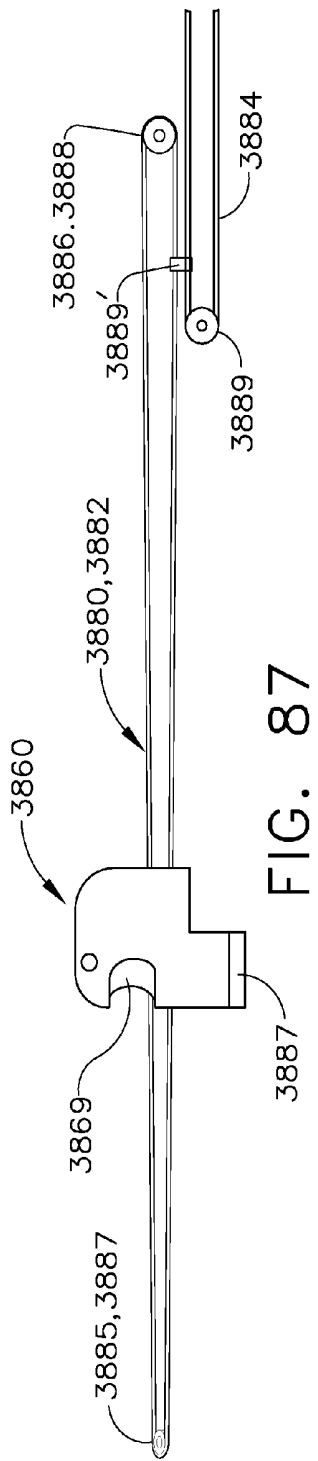


FIG. 86



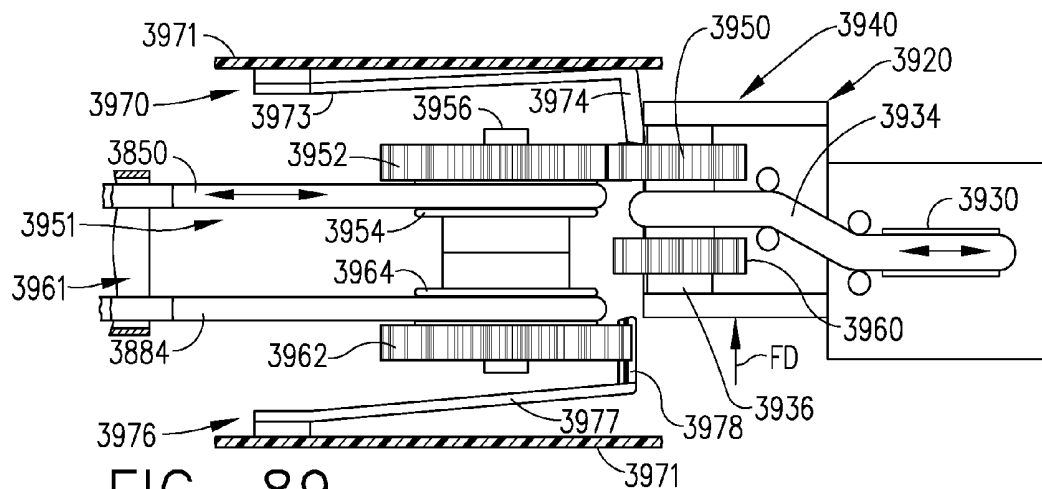


FIG. 89

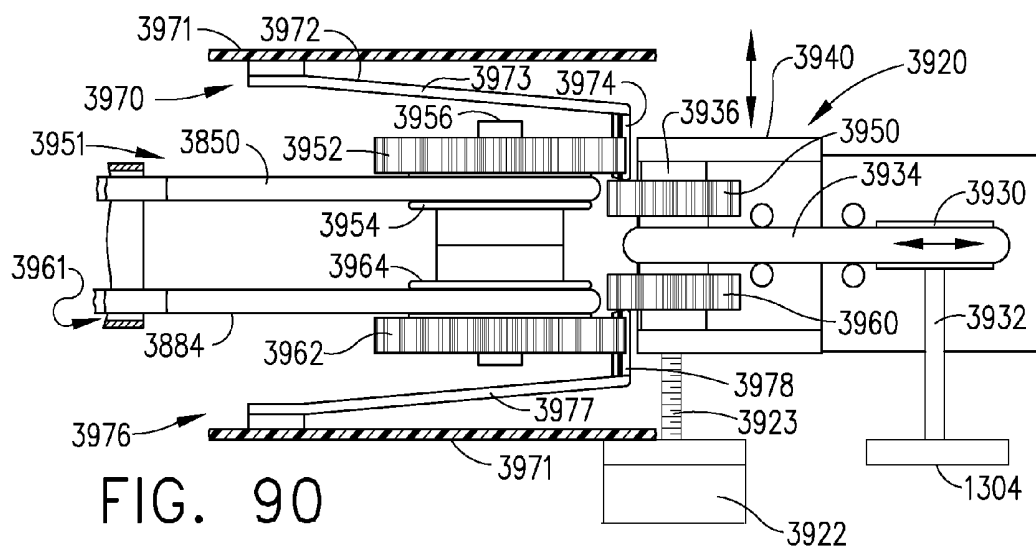


FIG. 90

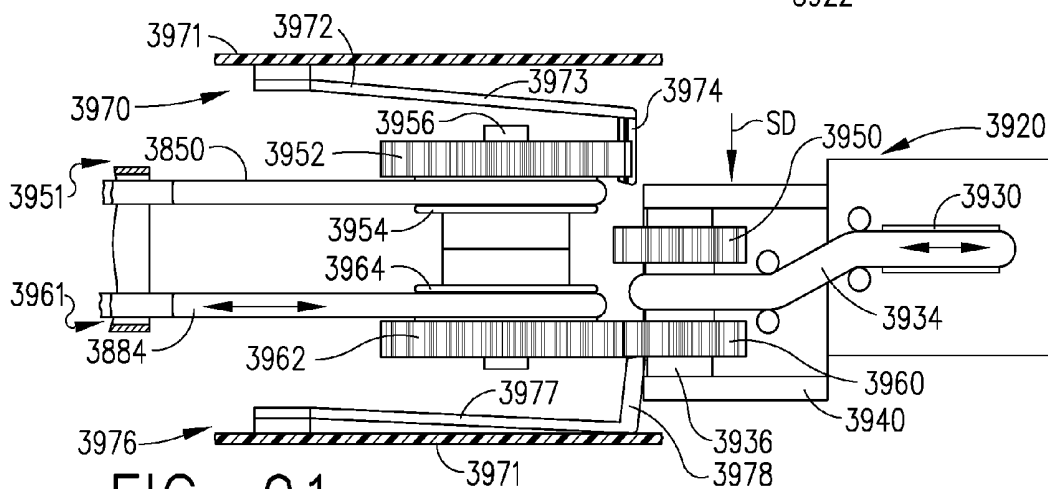


FIG. 91

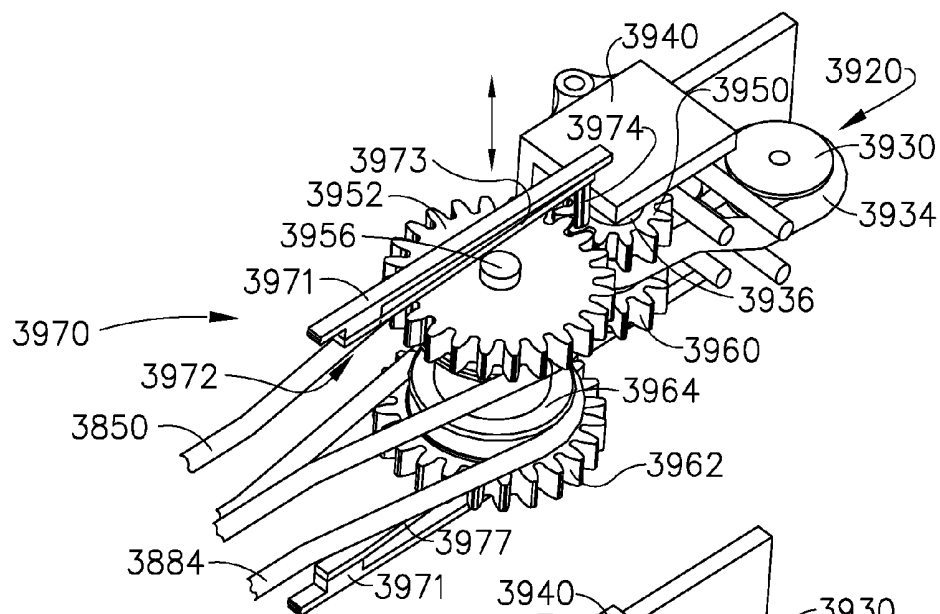


FIG. 92

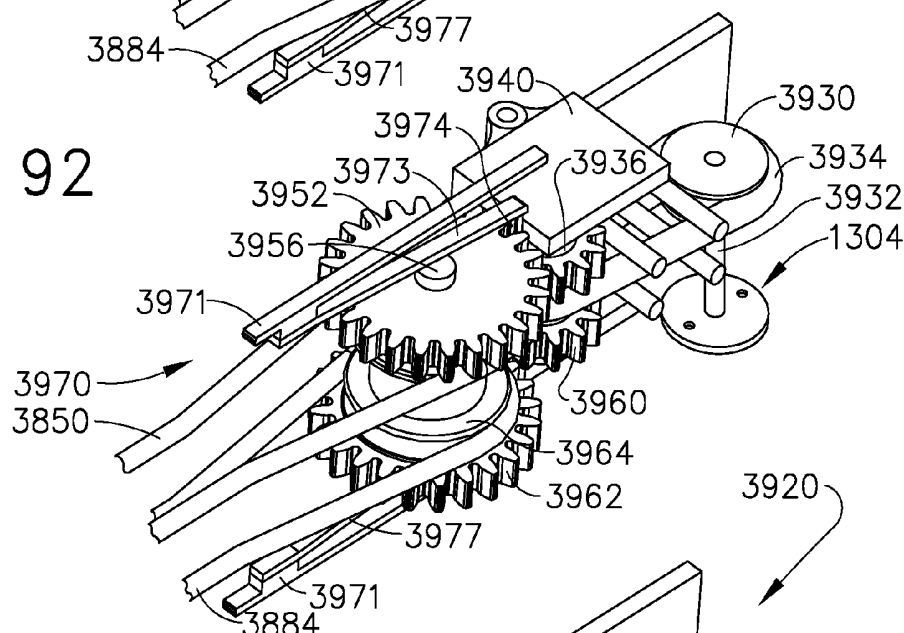


FIG. 93

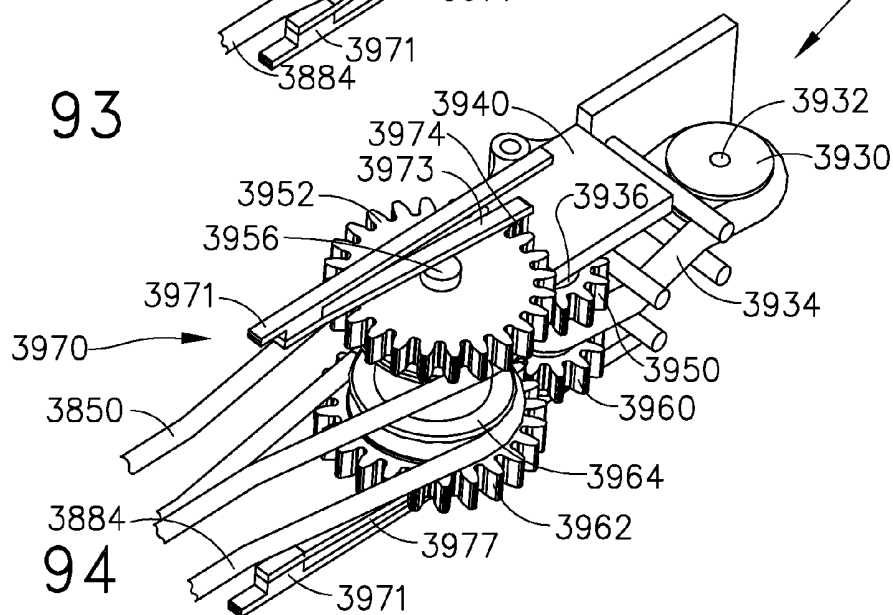
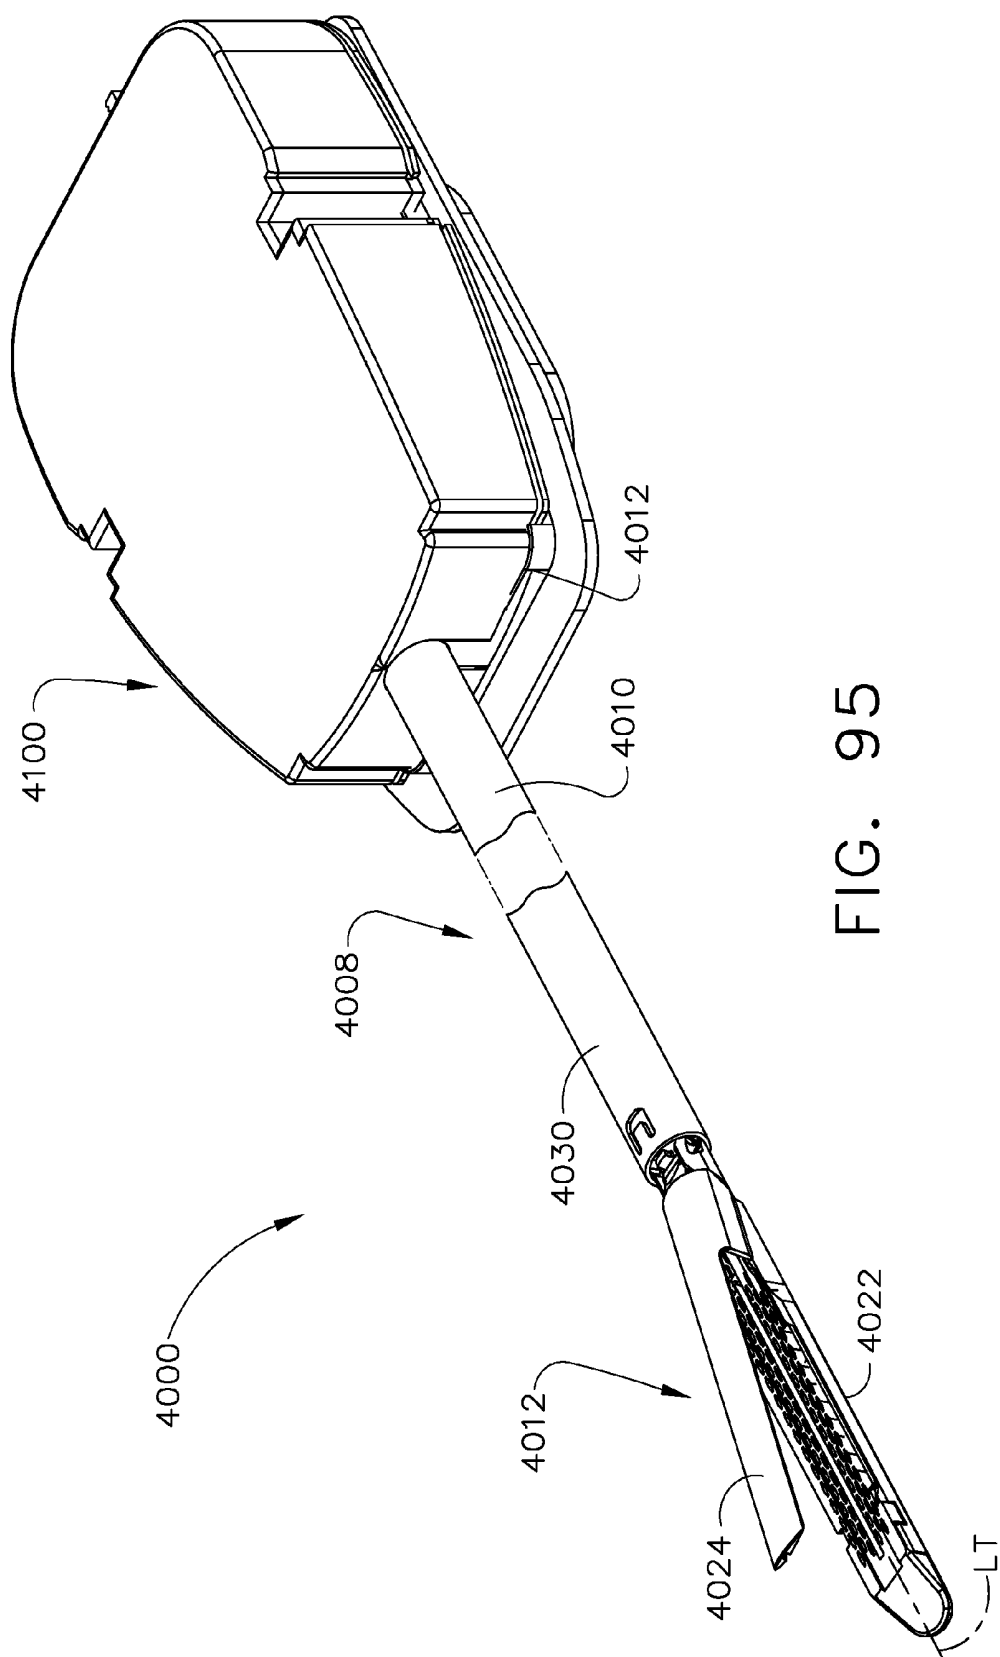


FIG. 94



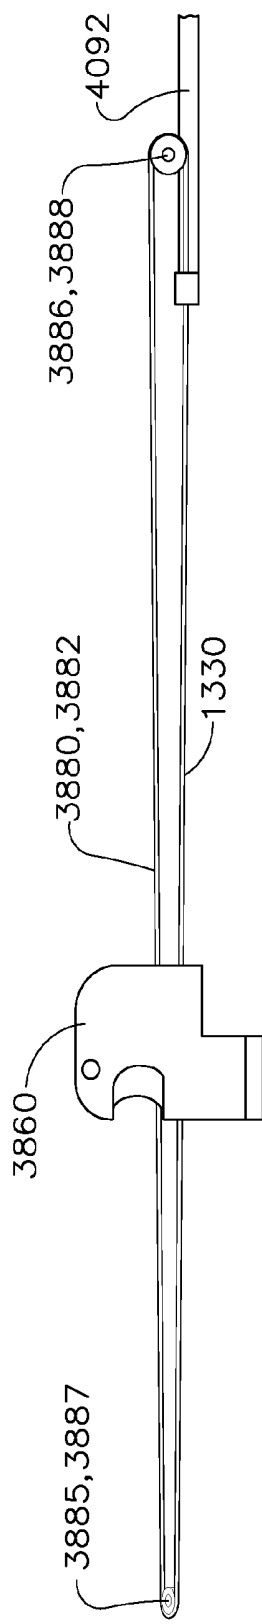


FIG. 96

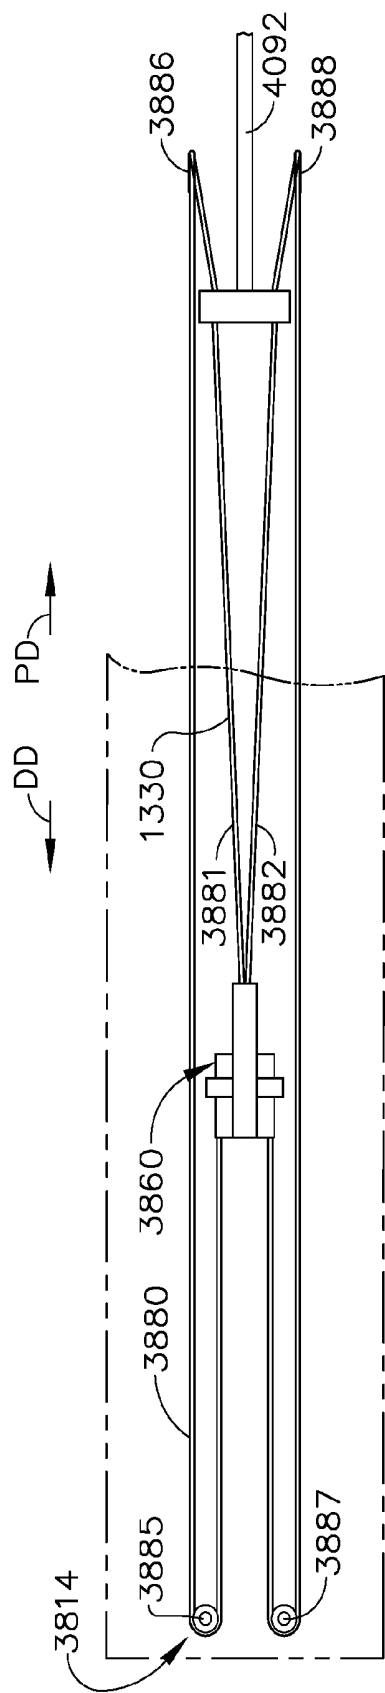


FIG. 97

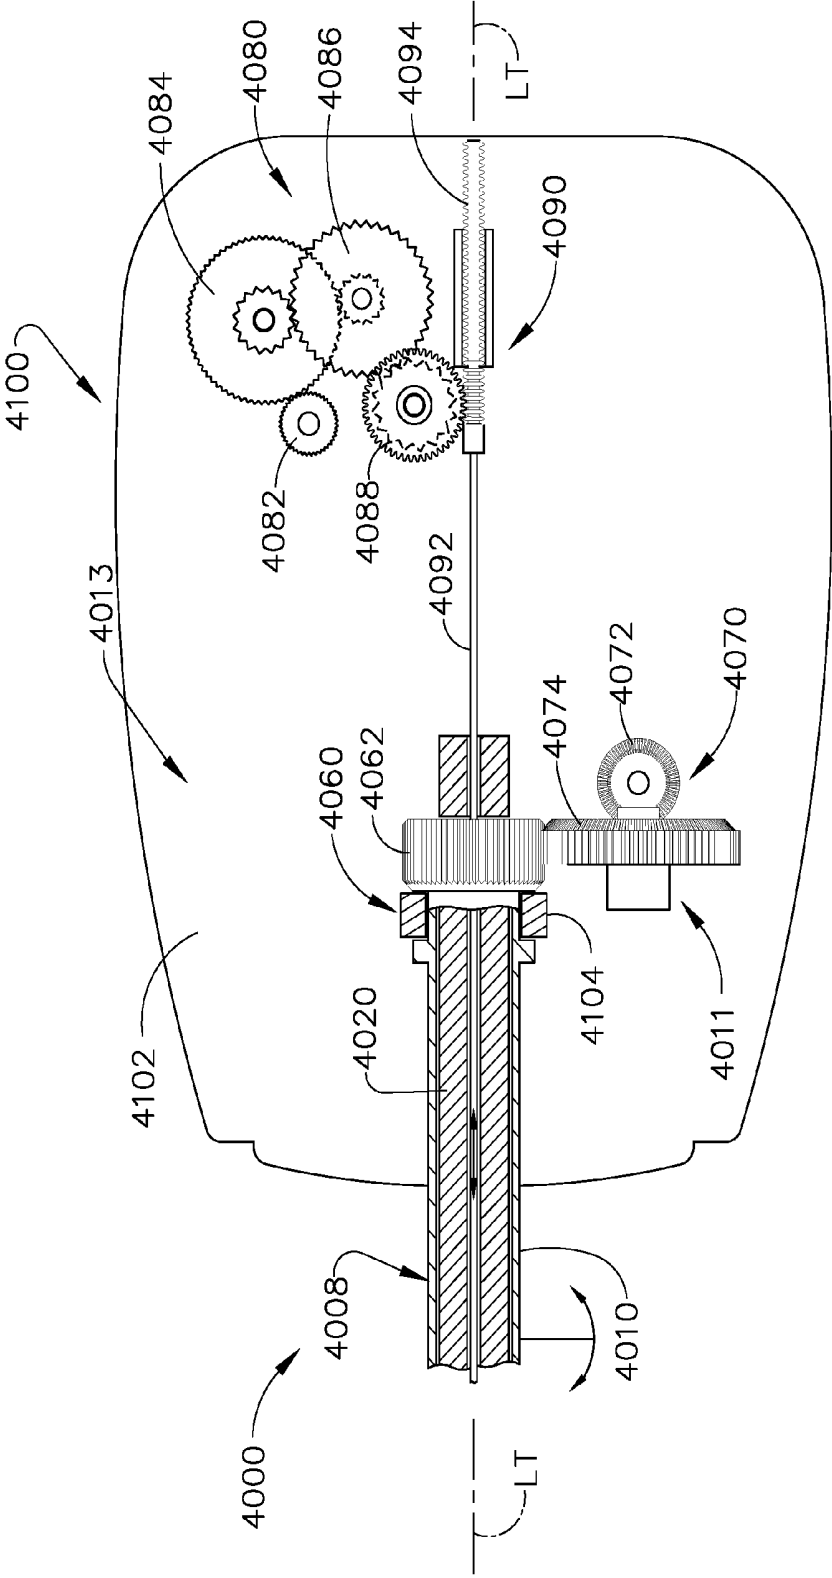
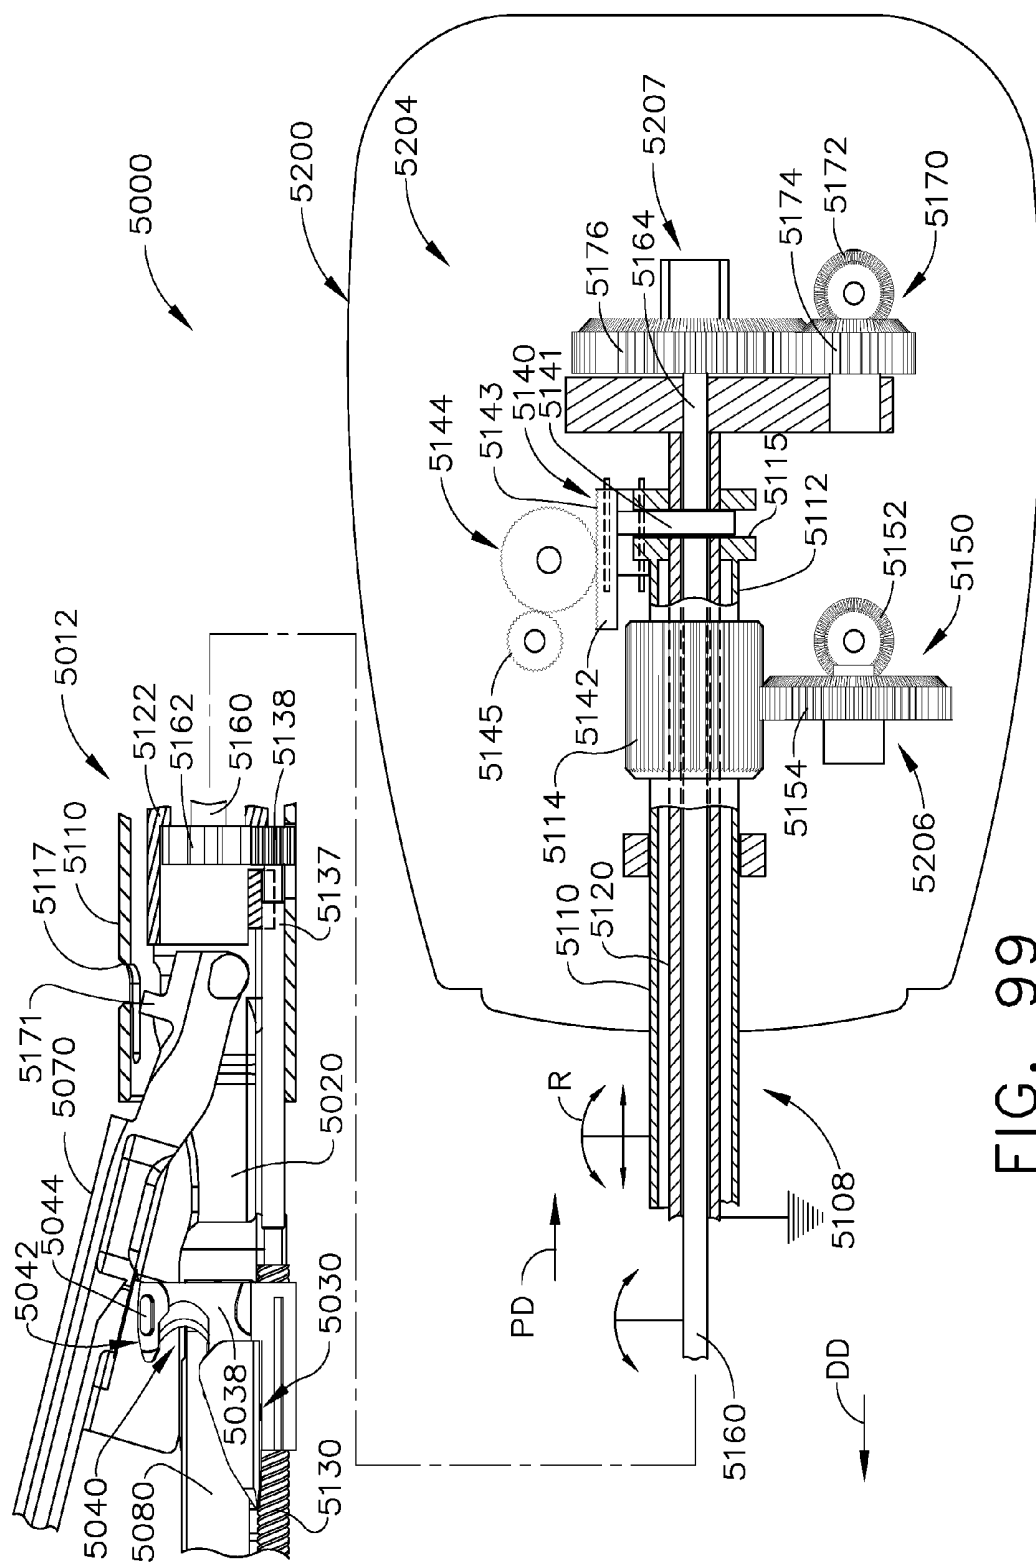
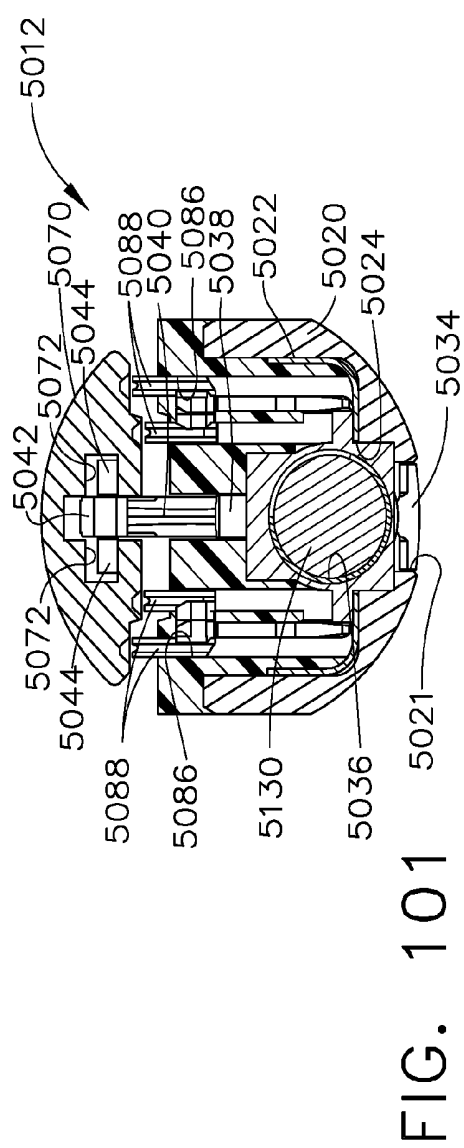
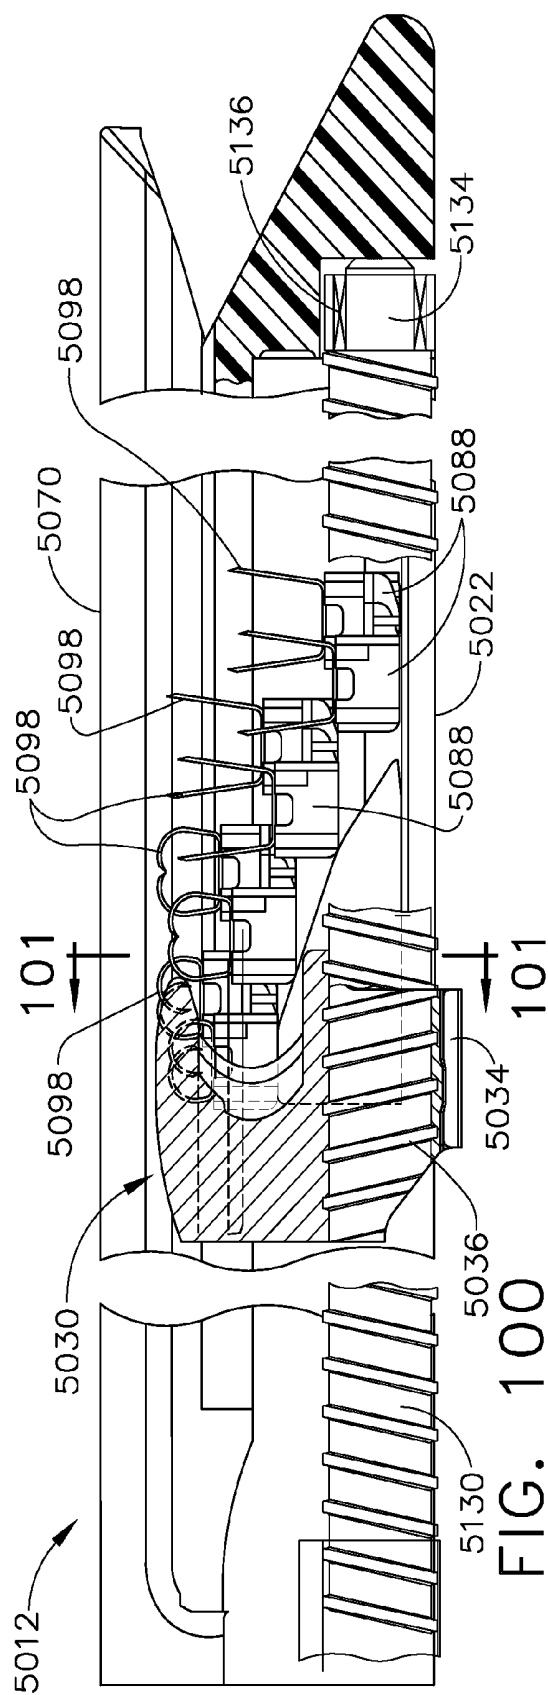


FIG. 98





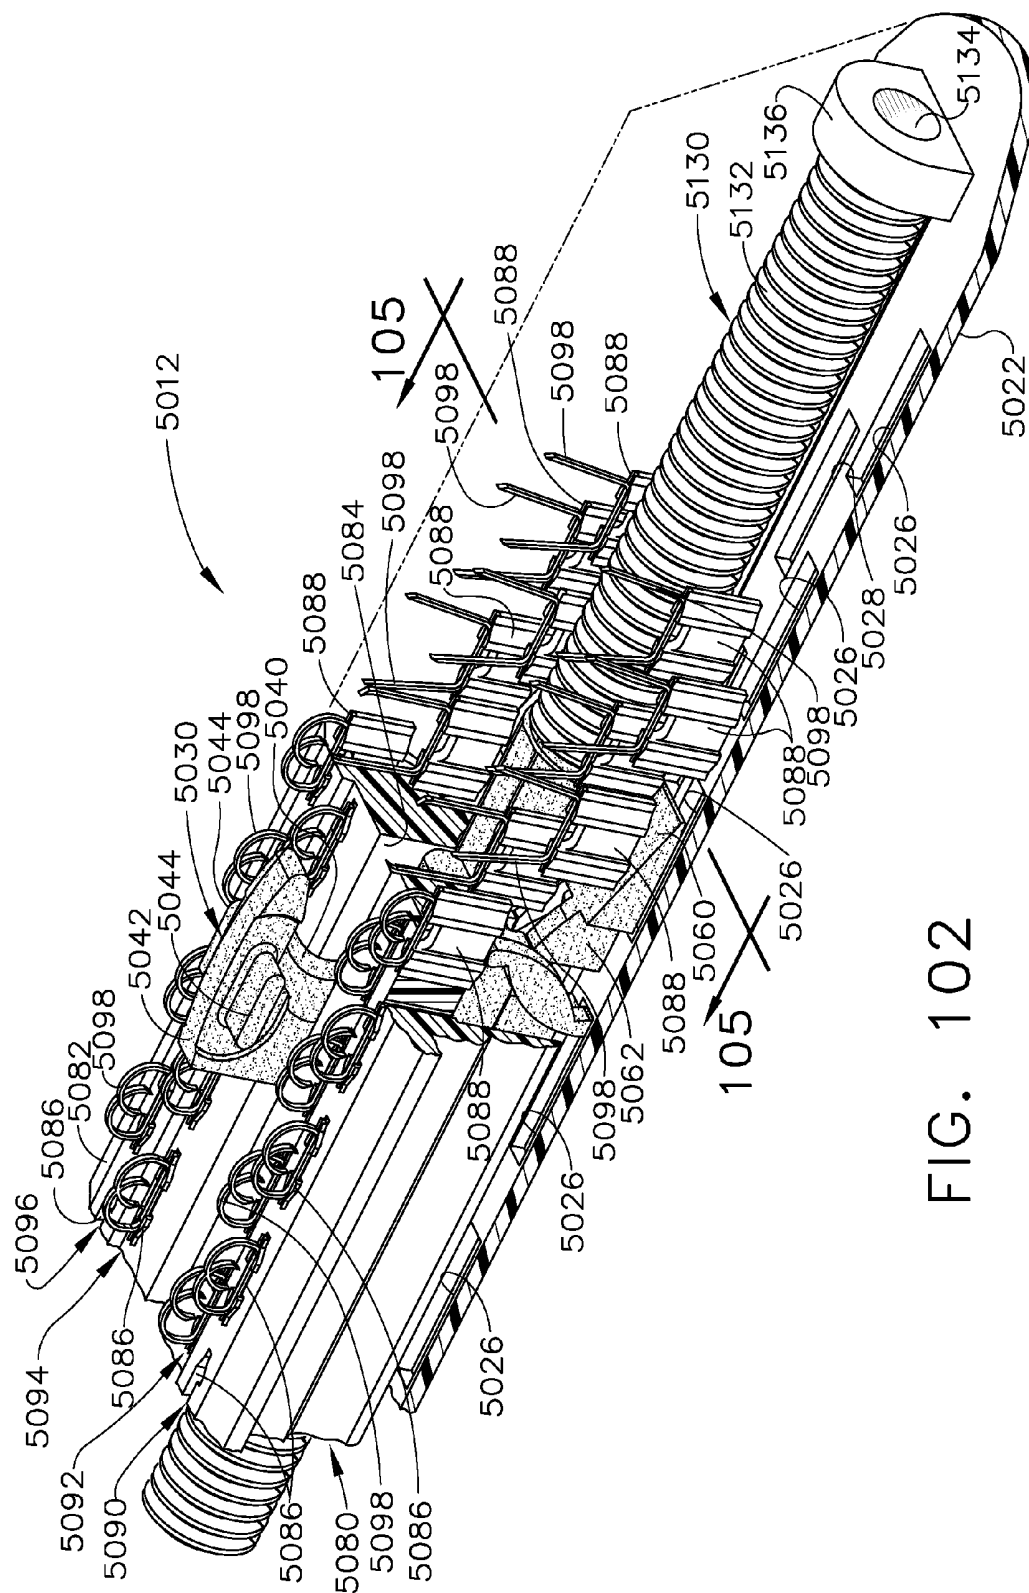


FIG. 102

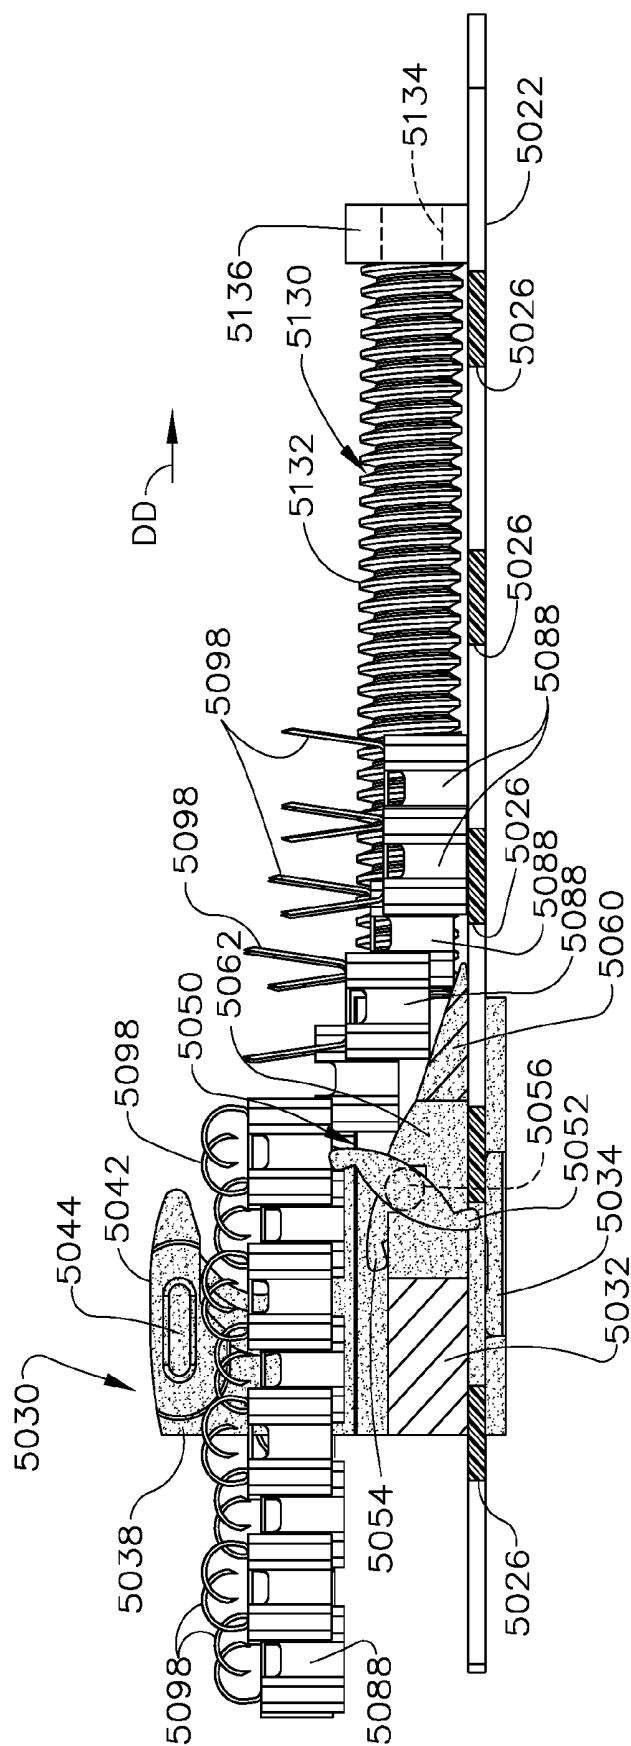


FIG. 103

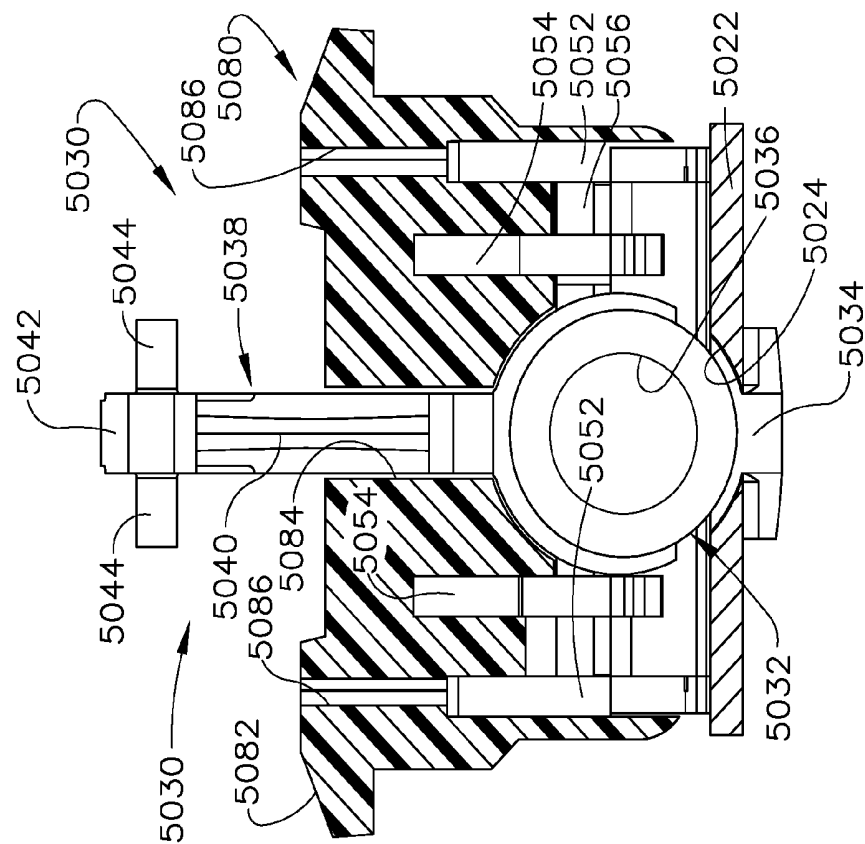


FIG. 104

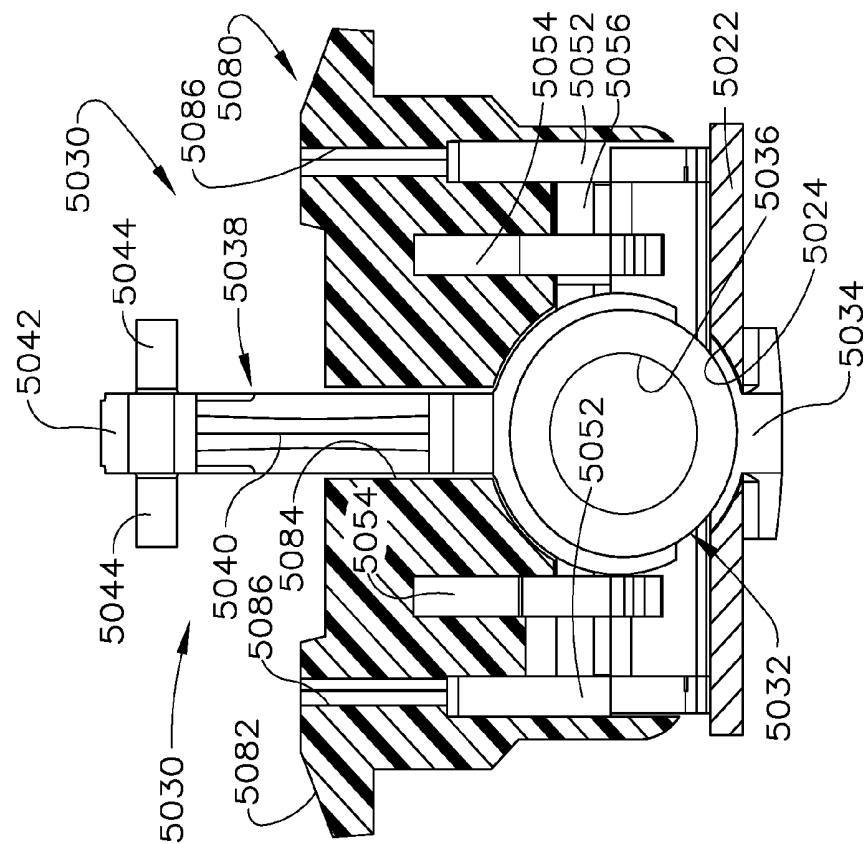


FIG. 105

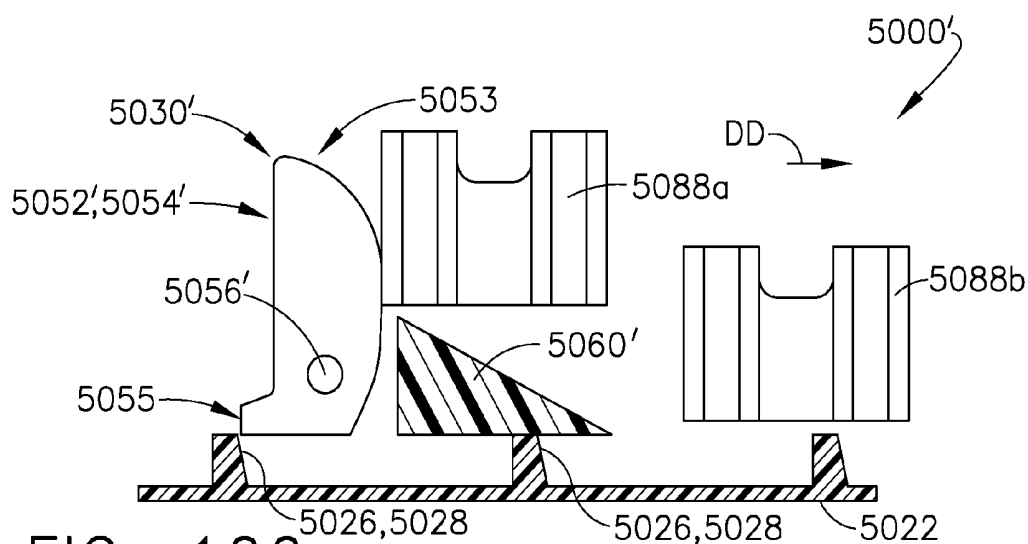


FIG. 106

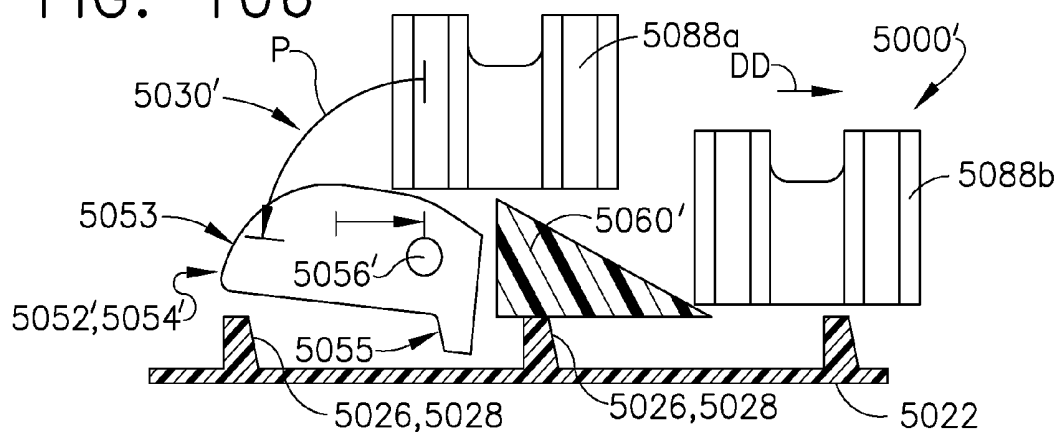


FIG. 107

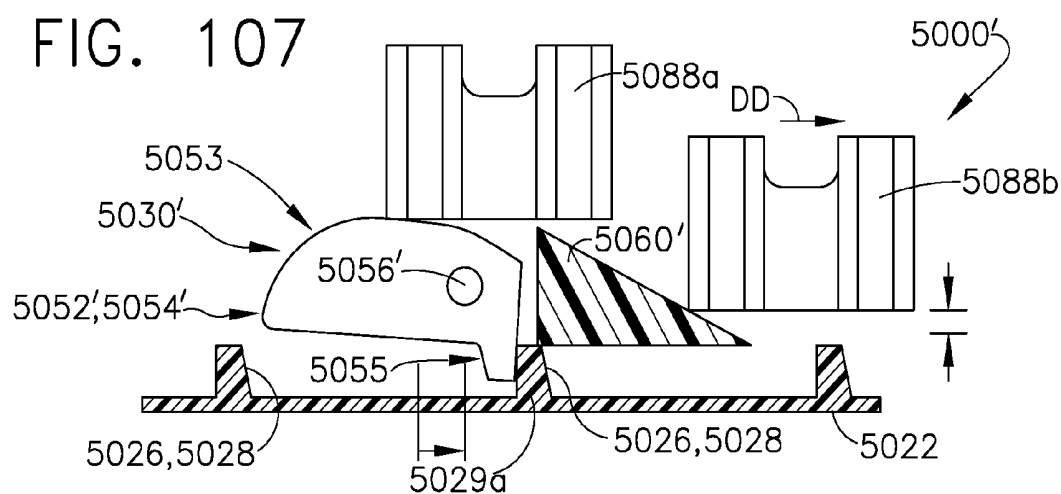


FIG. 108

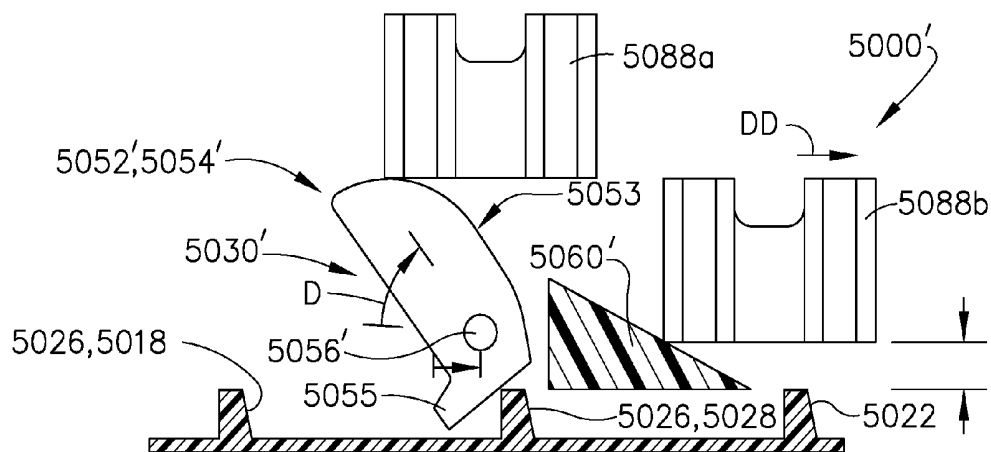


FIG. 109

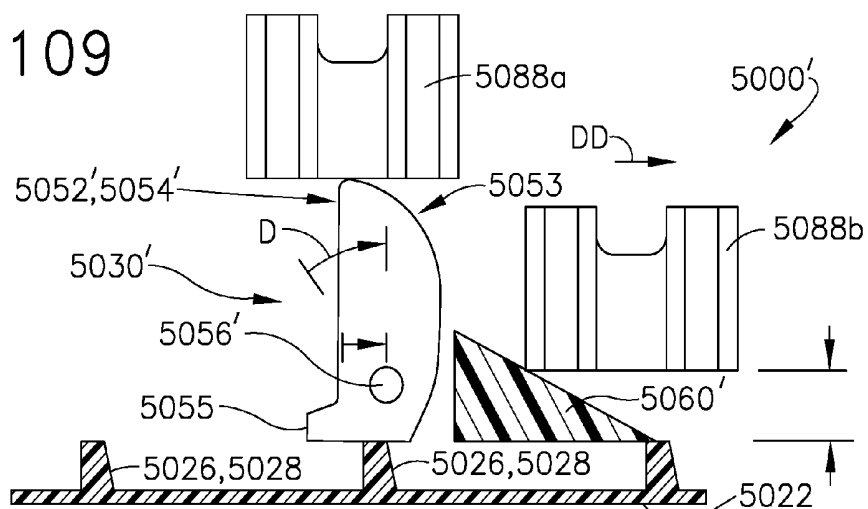


FIG. 110

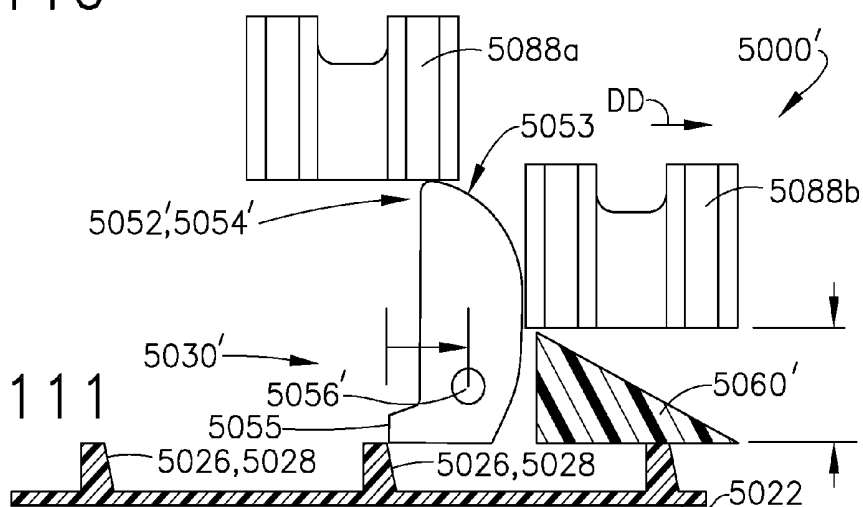


FIG. 111

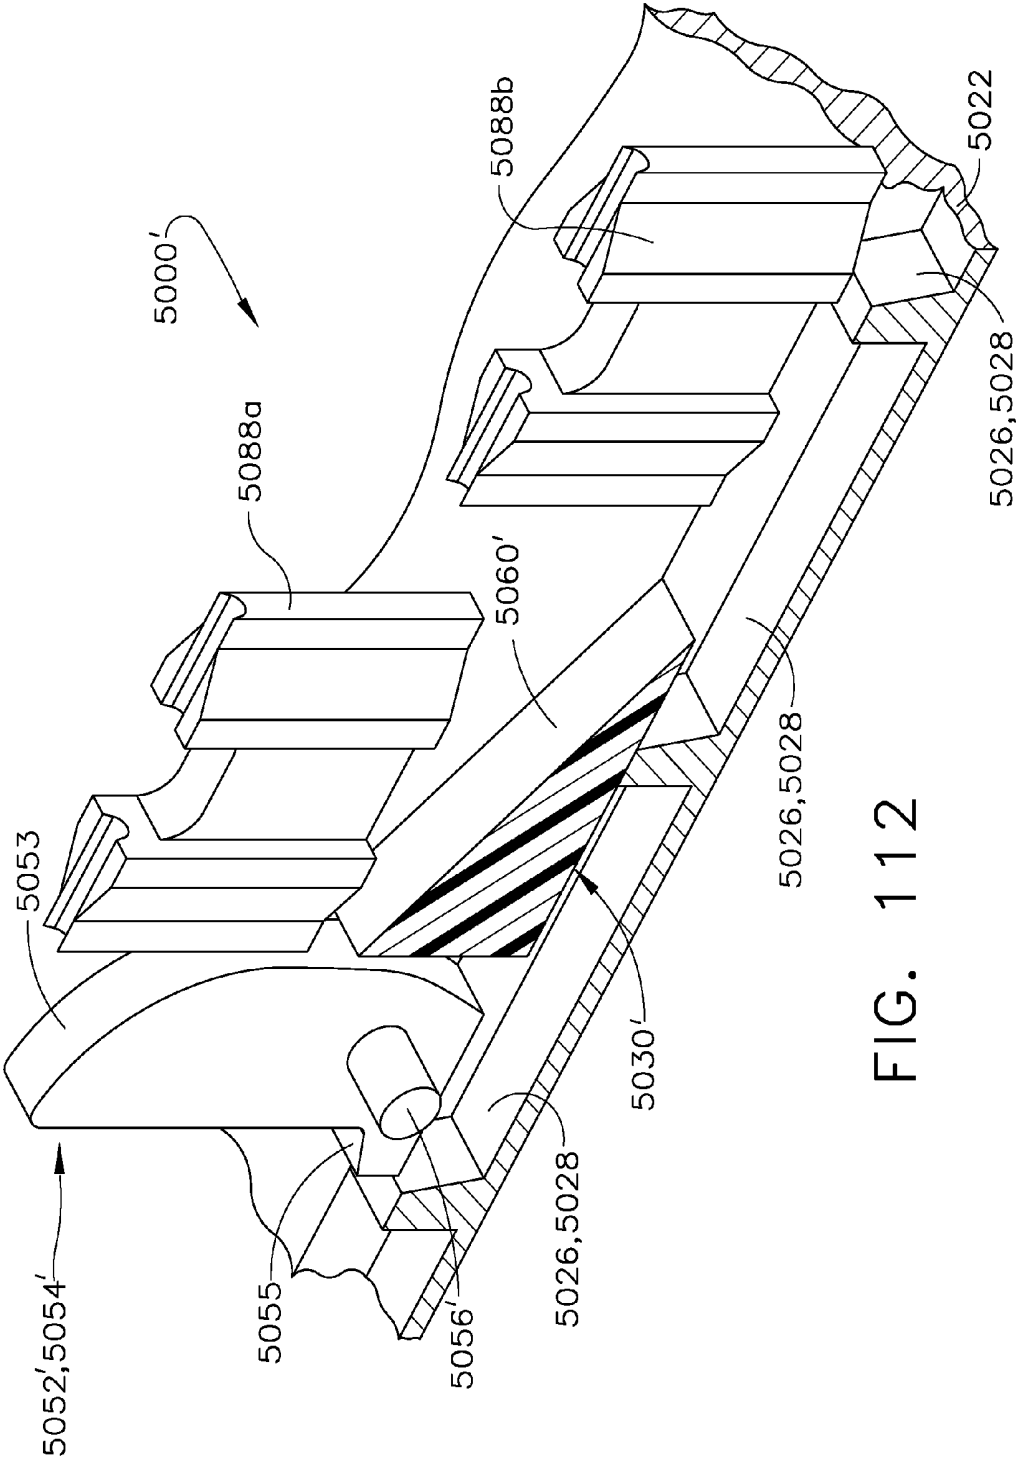


FIG. 112

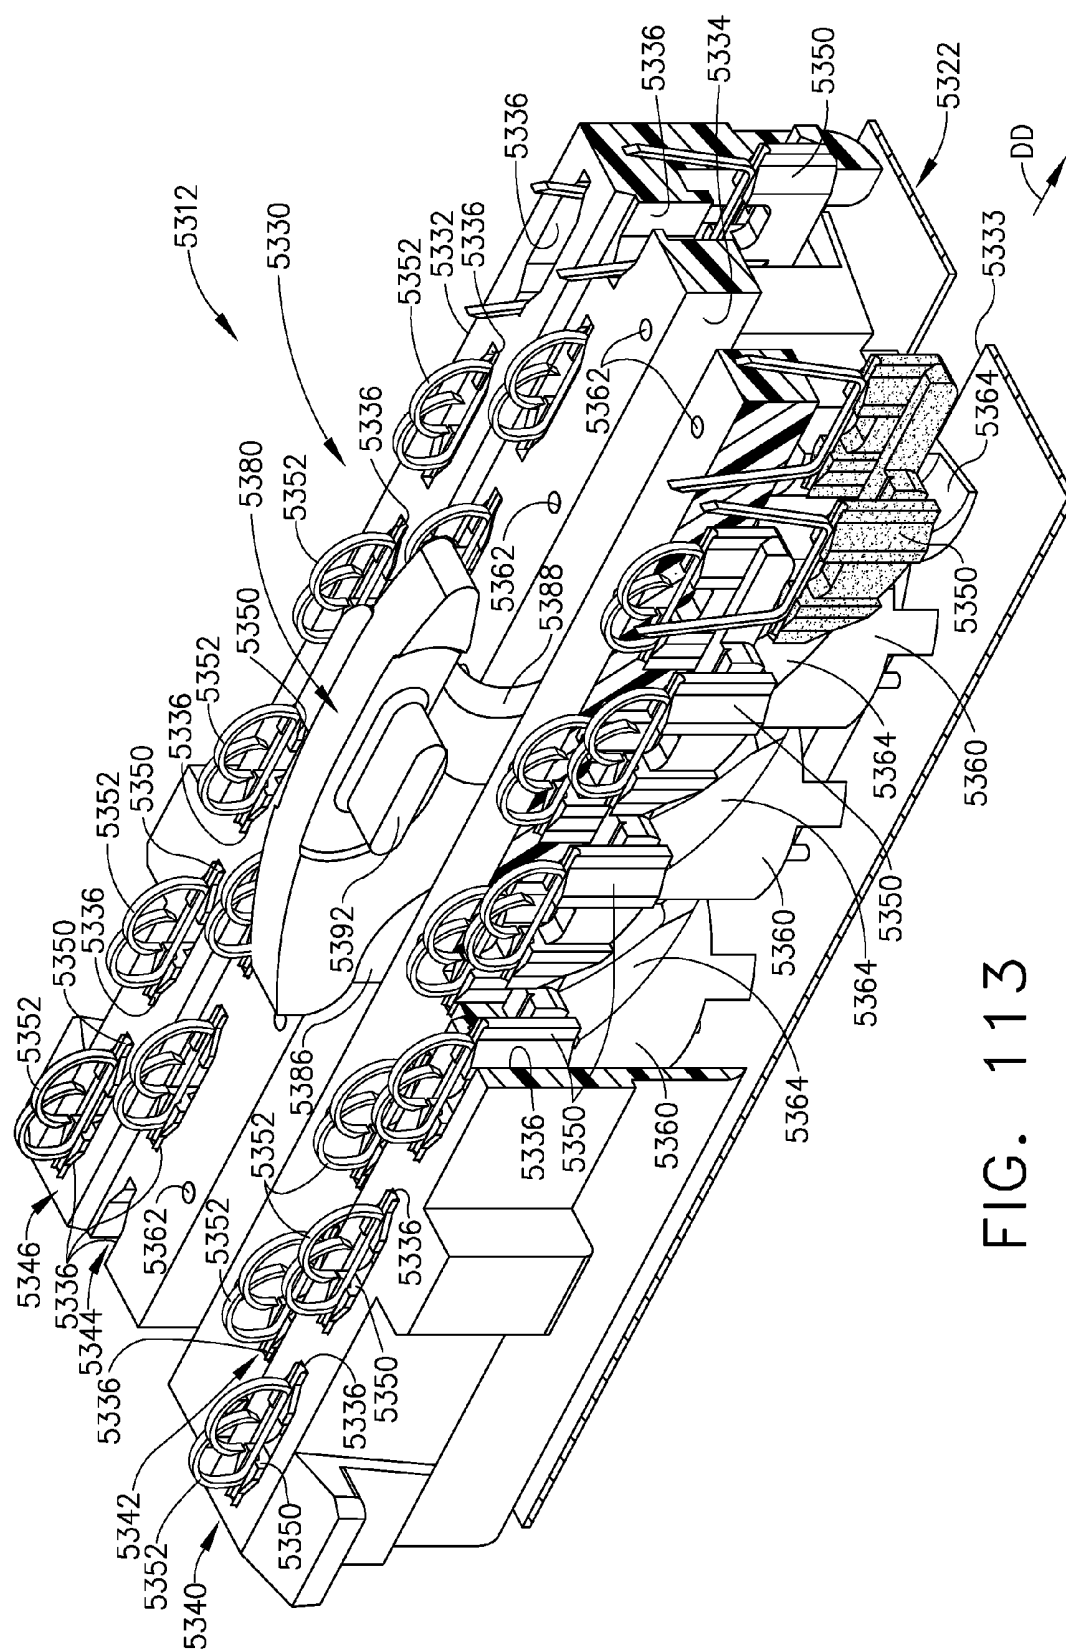


FIG. 113

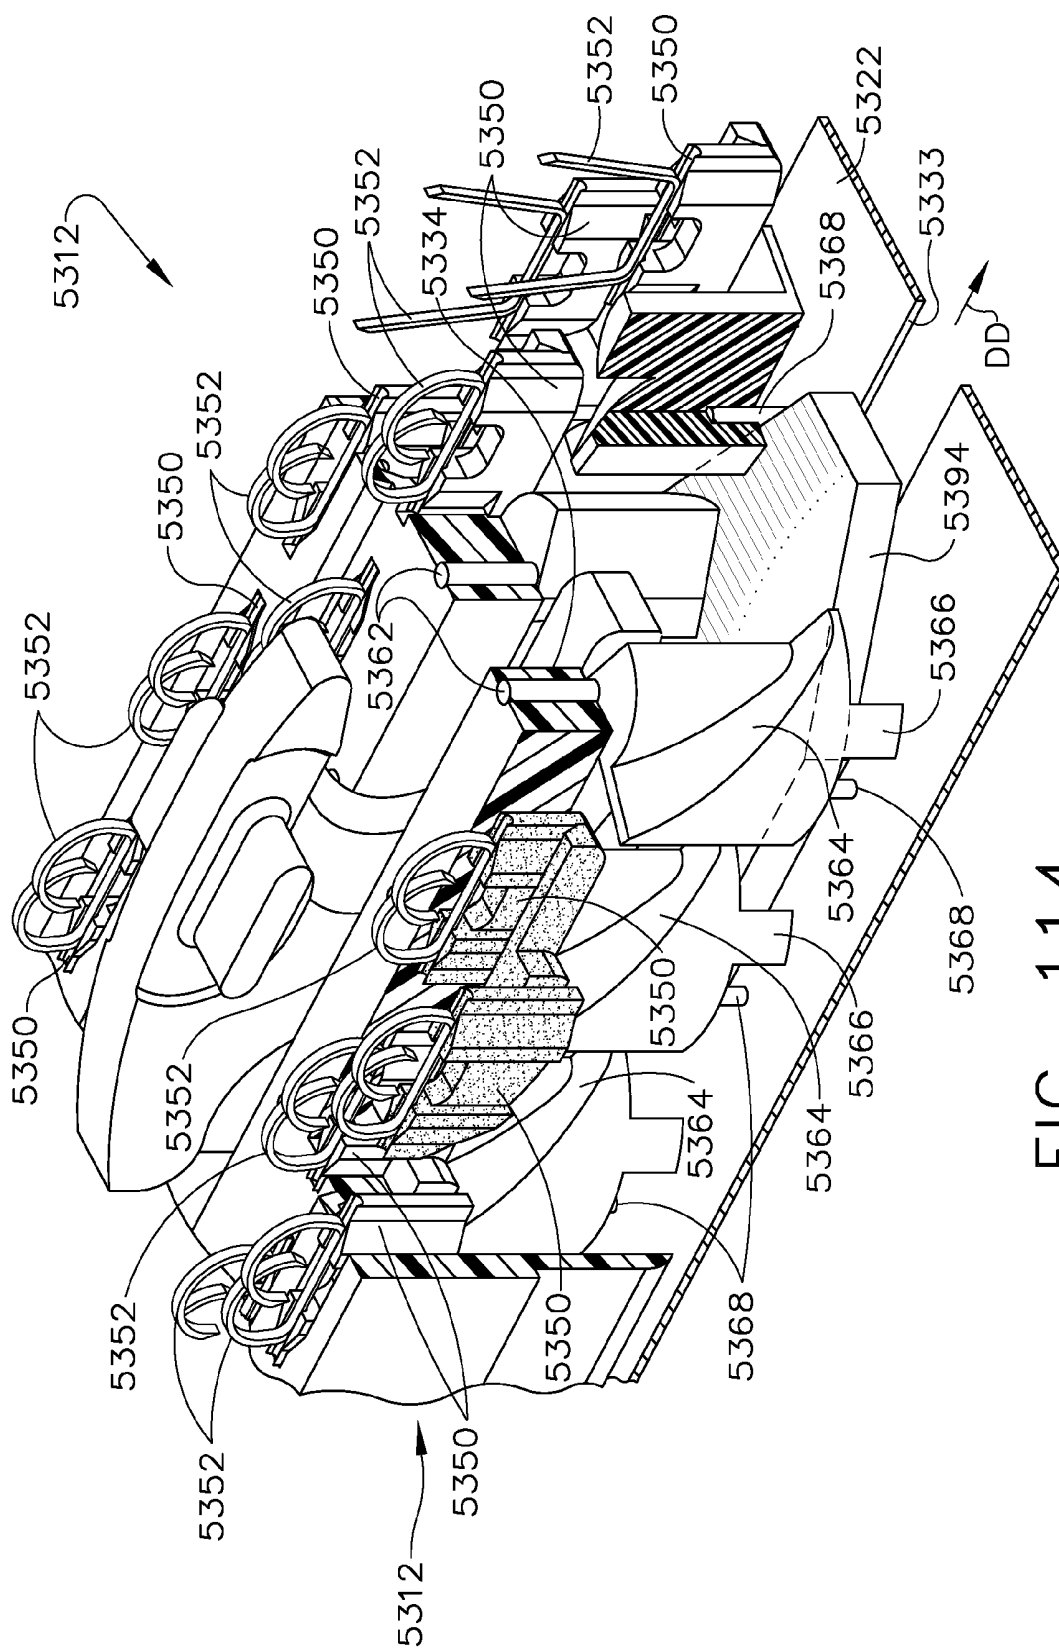


FIG. 114

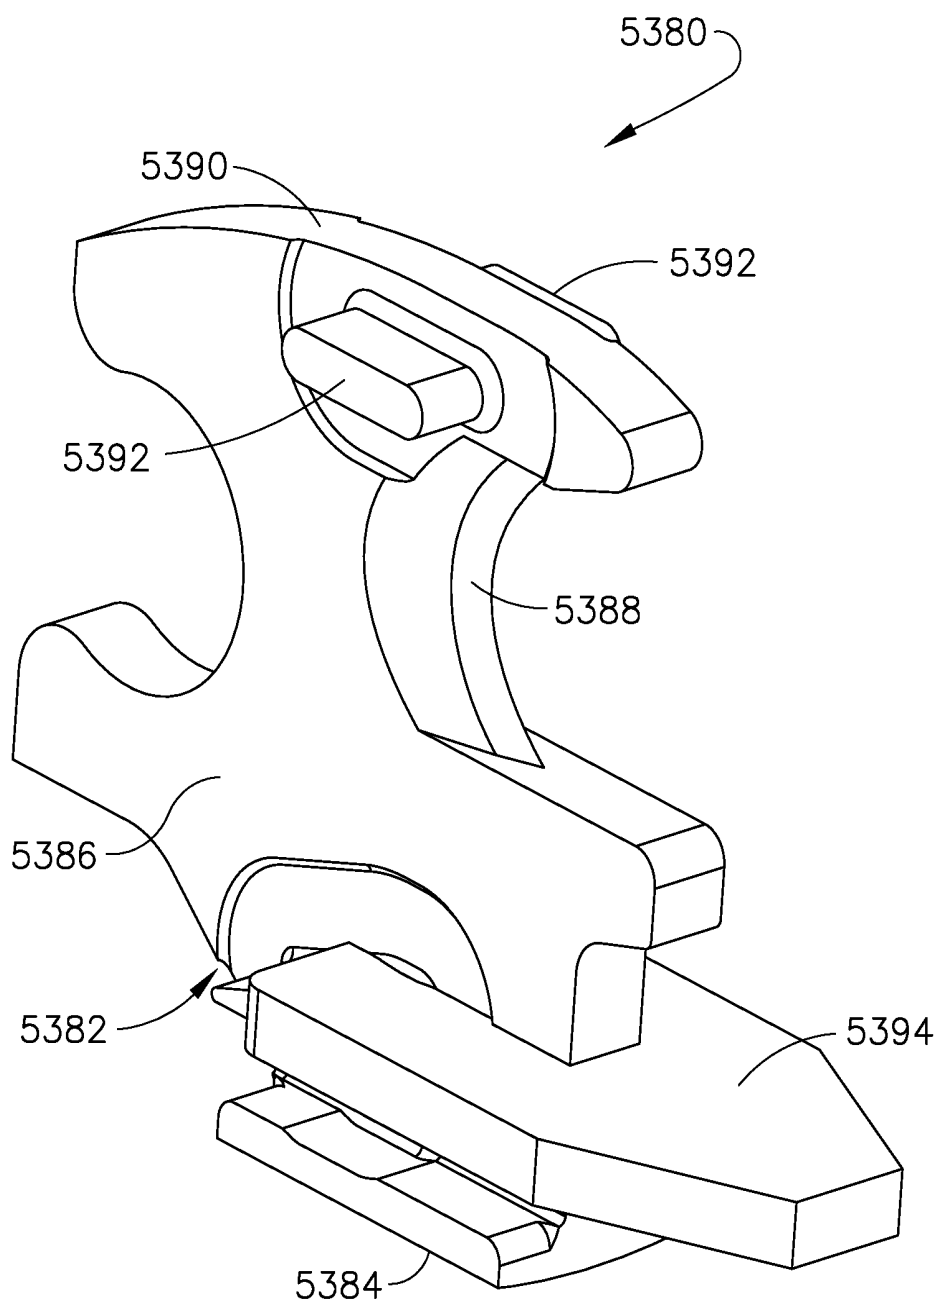


FIG. 115

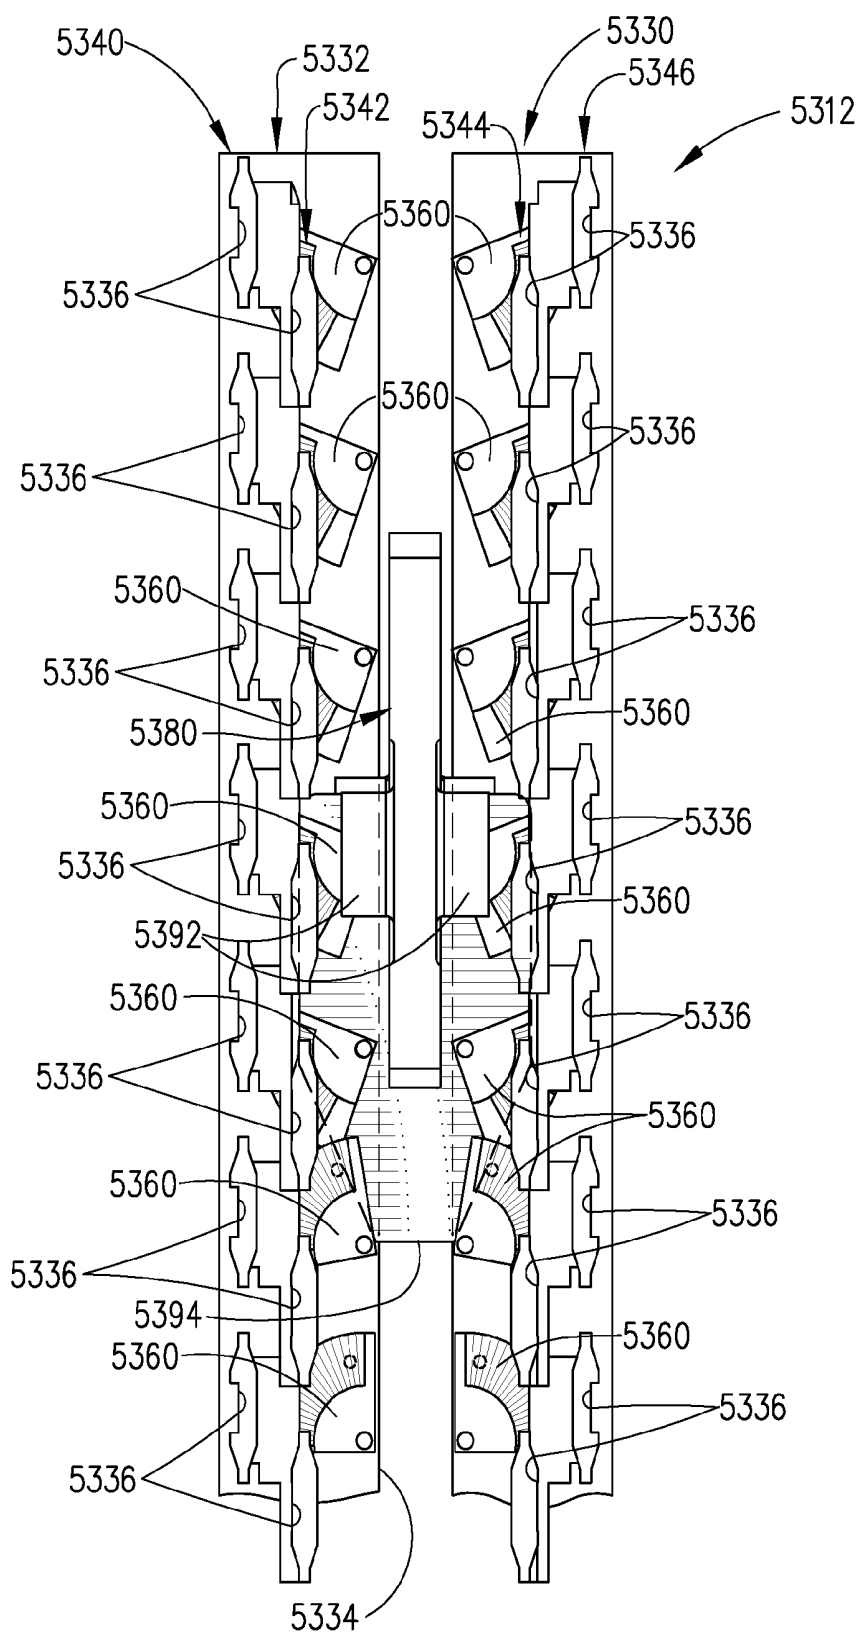


FIG. 116

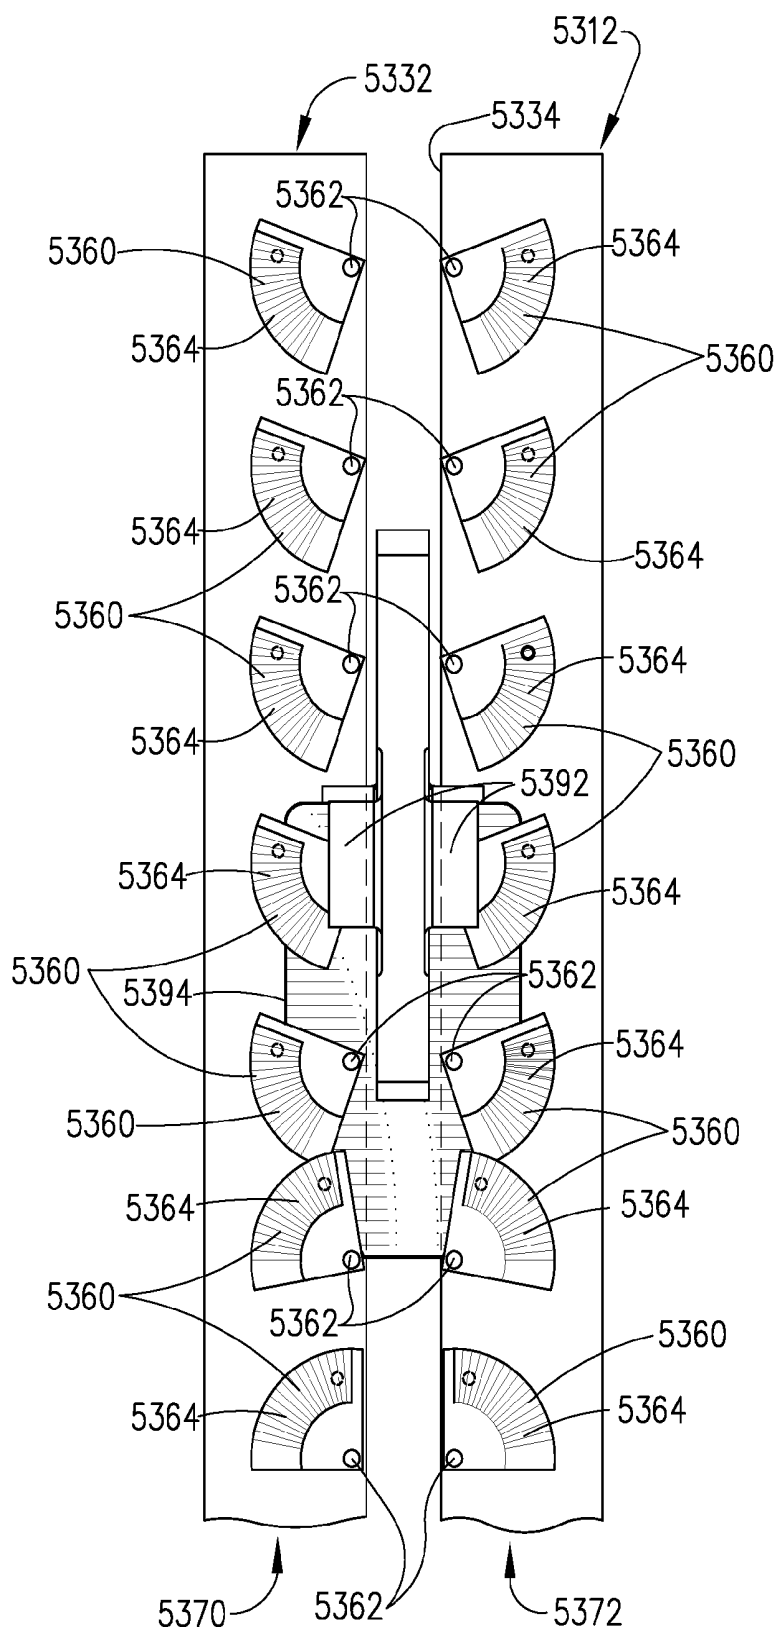


FIG. 117

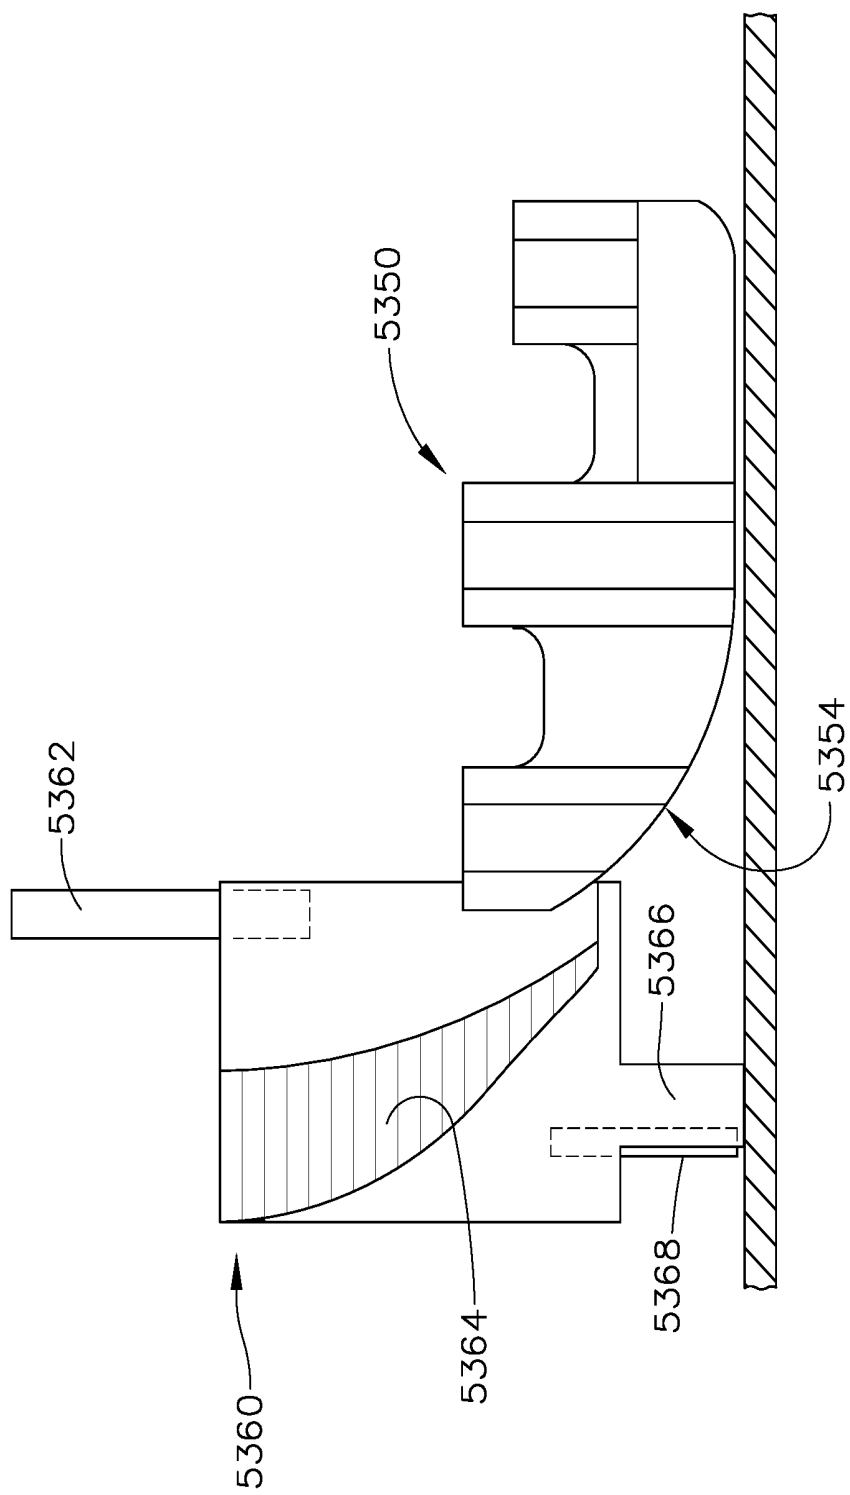


FIG. 118

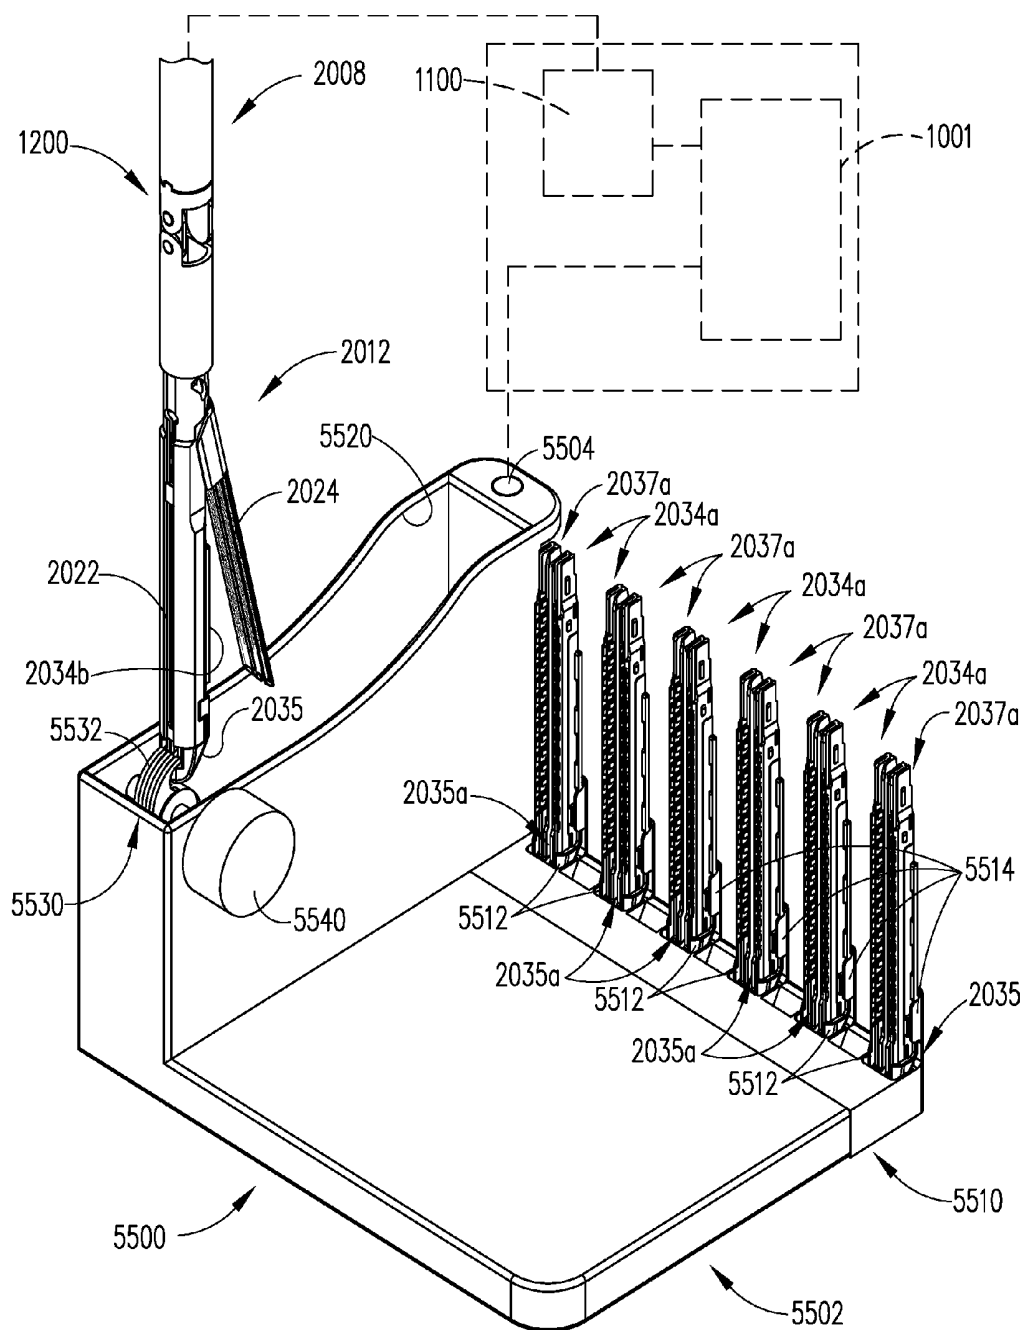


FIG. 119

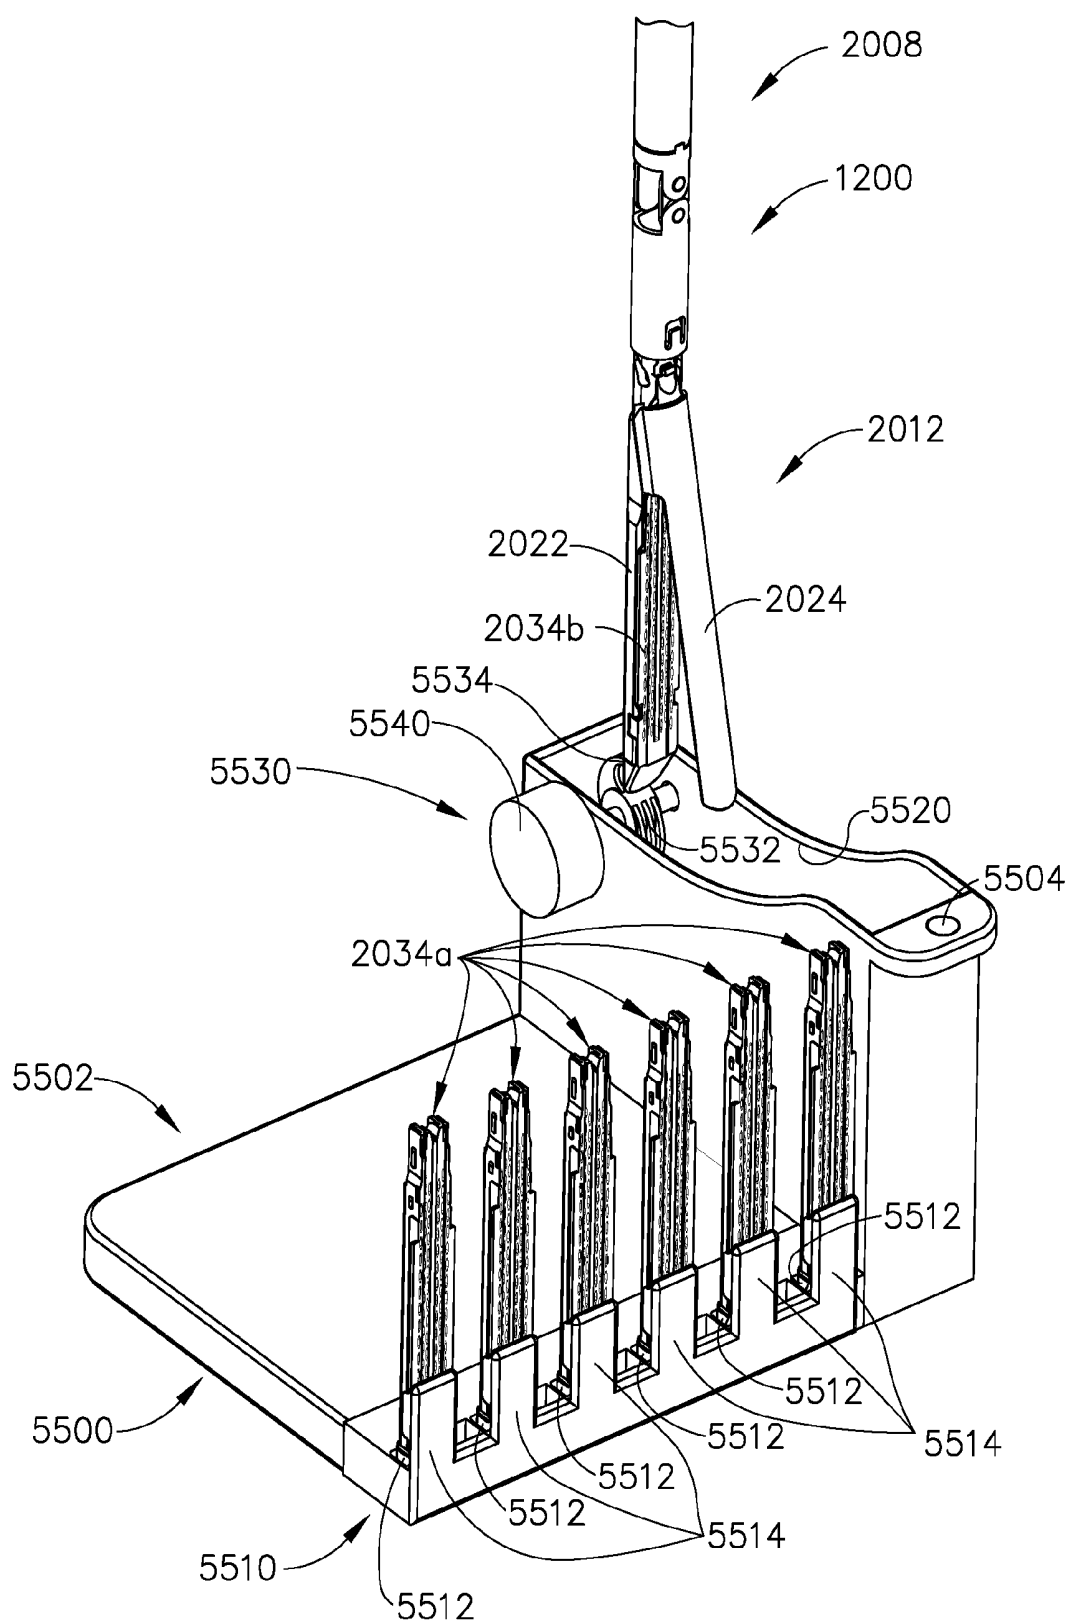
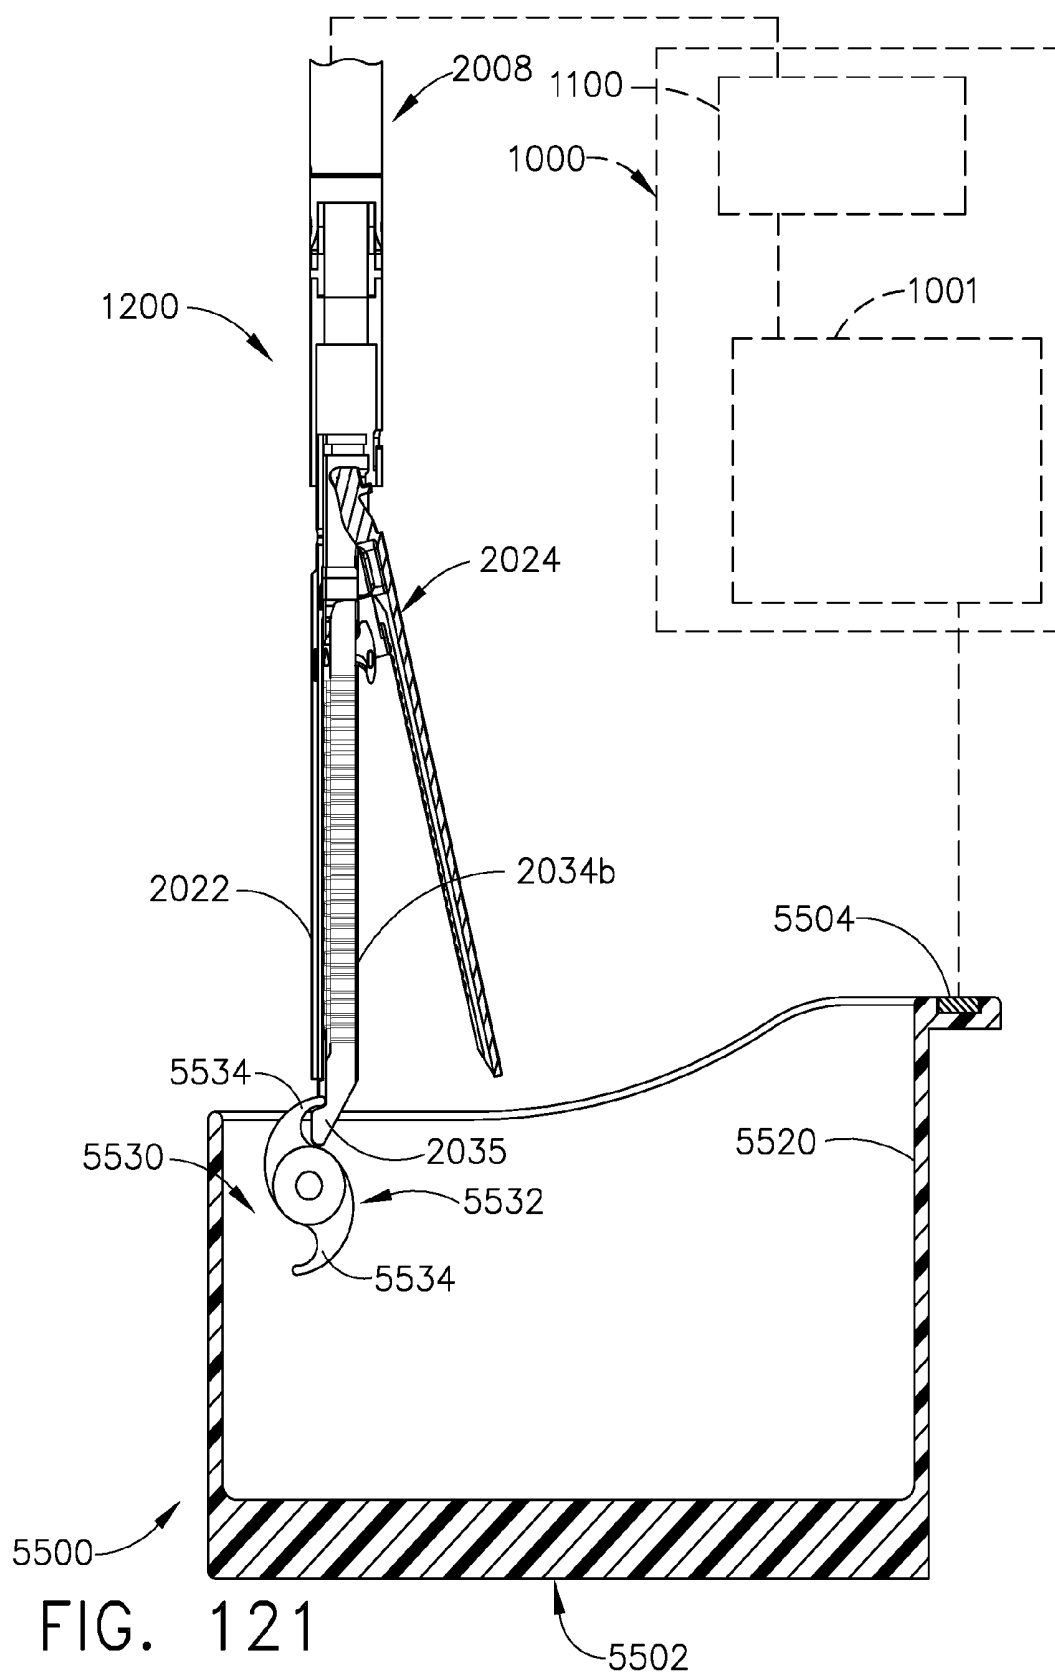


FIG. 120



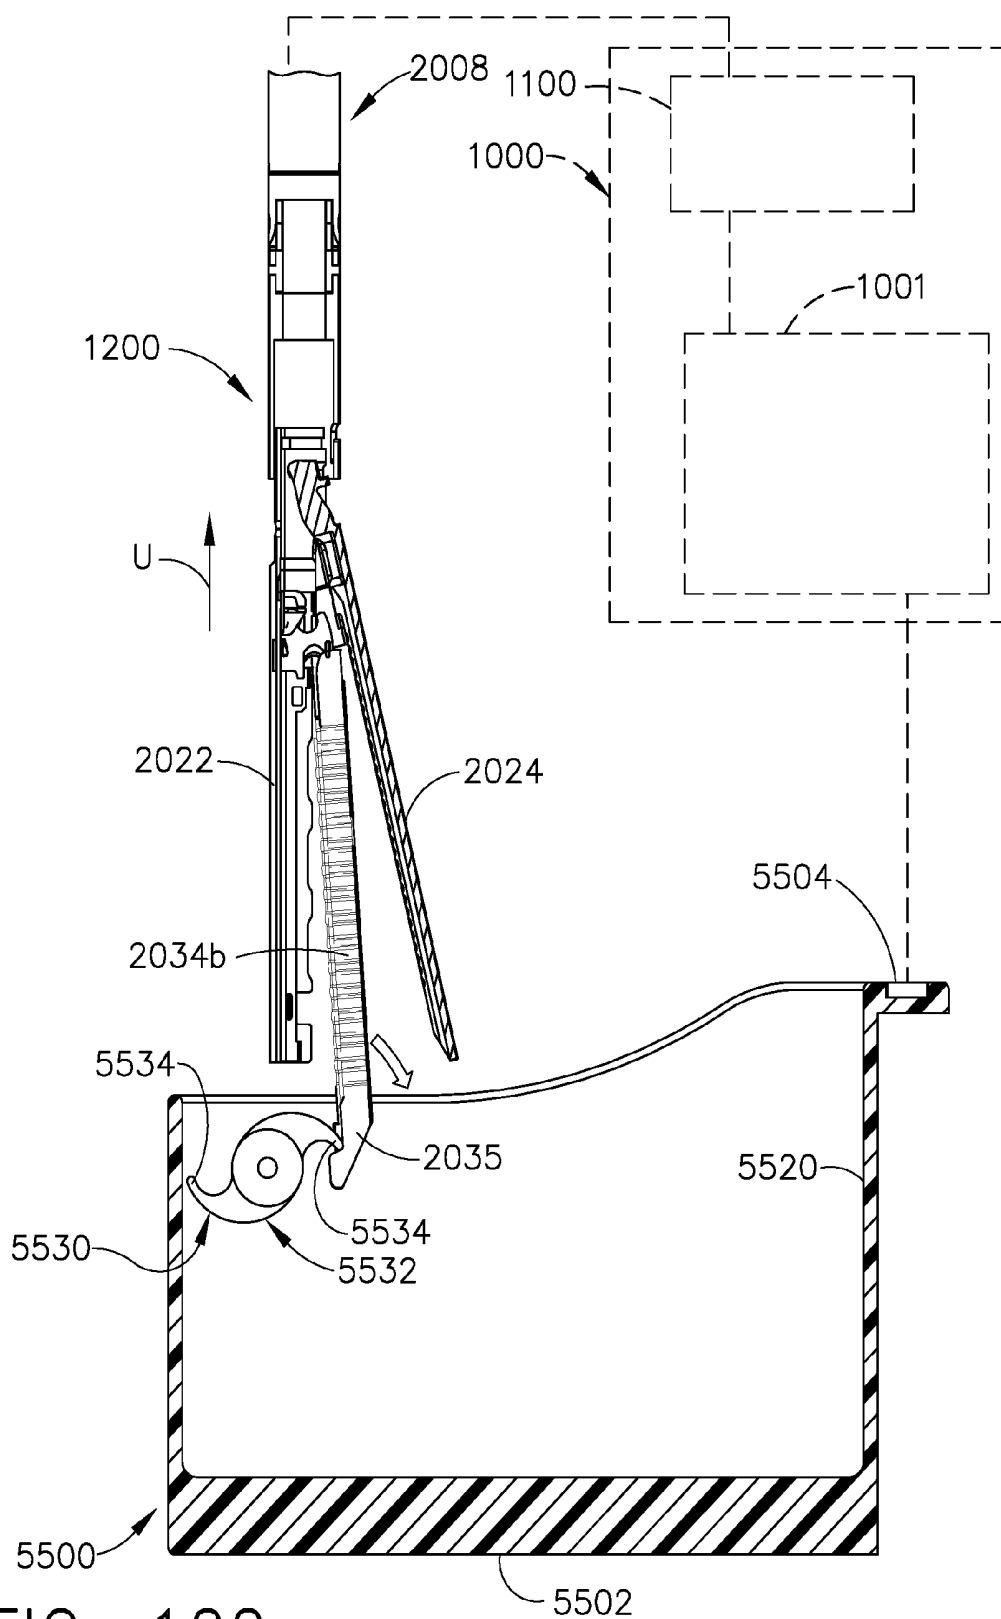
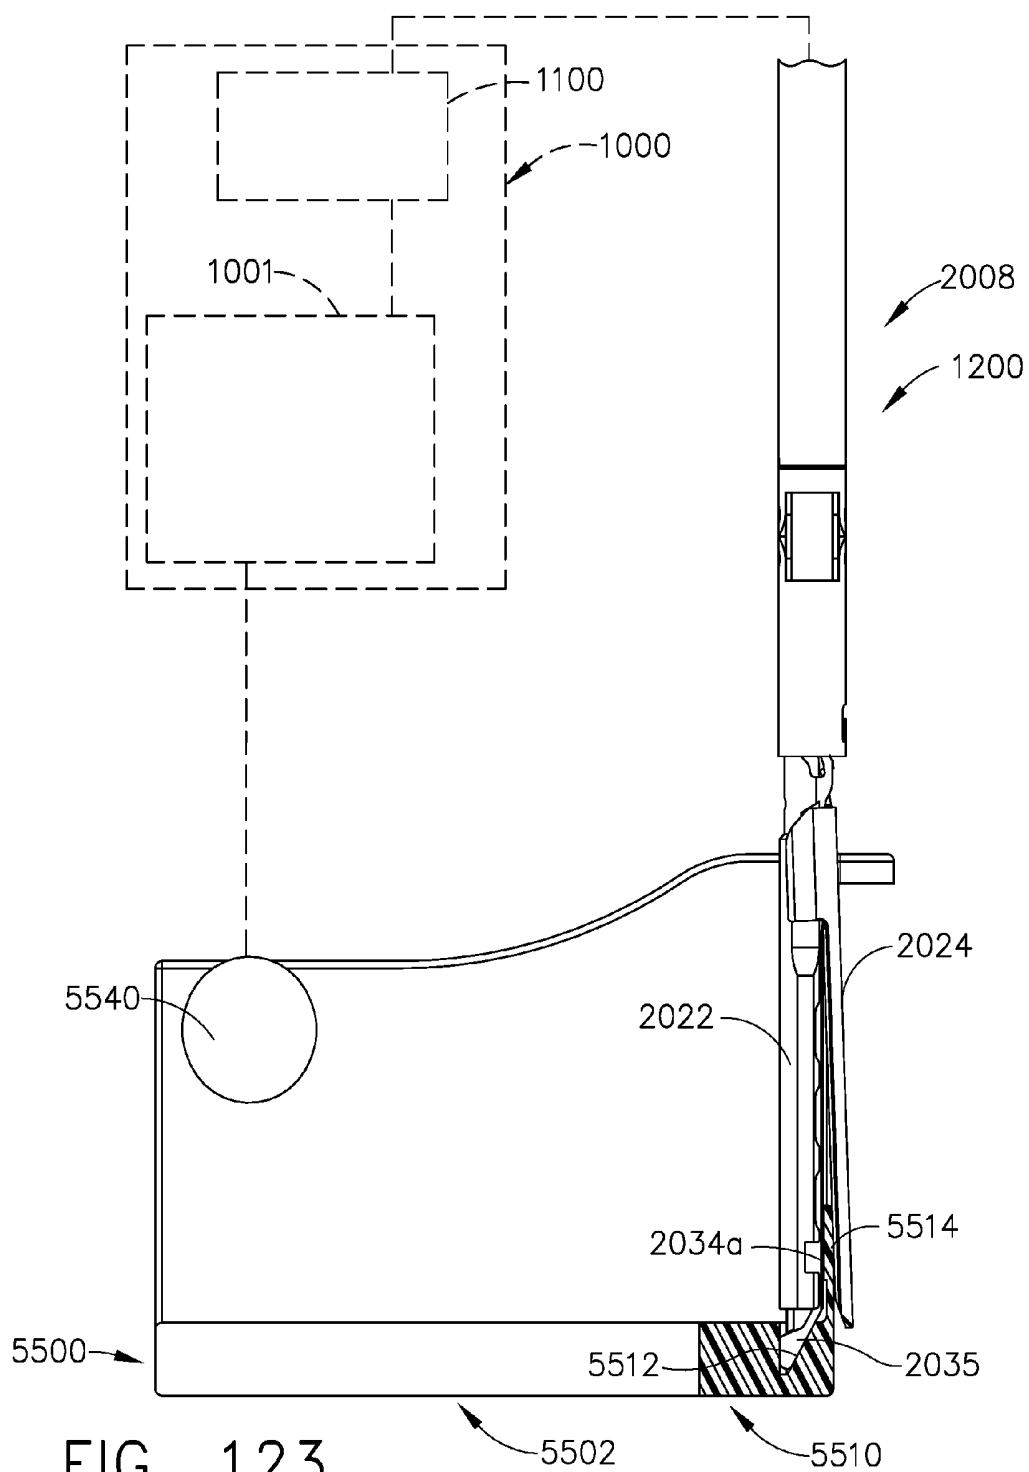


FIG. 122



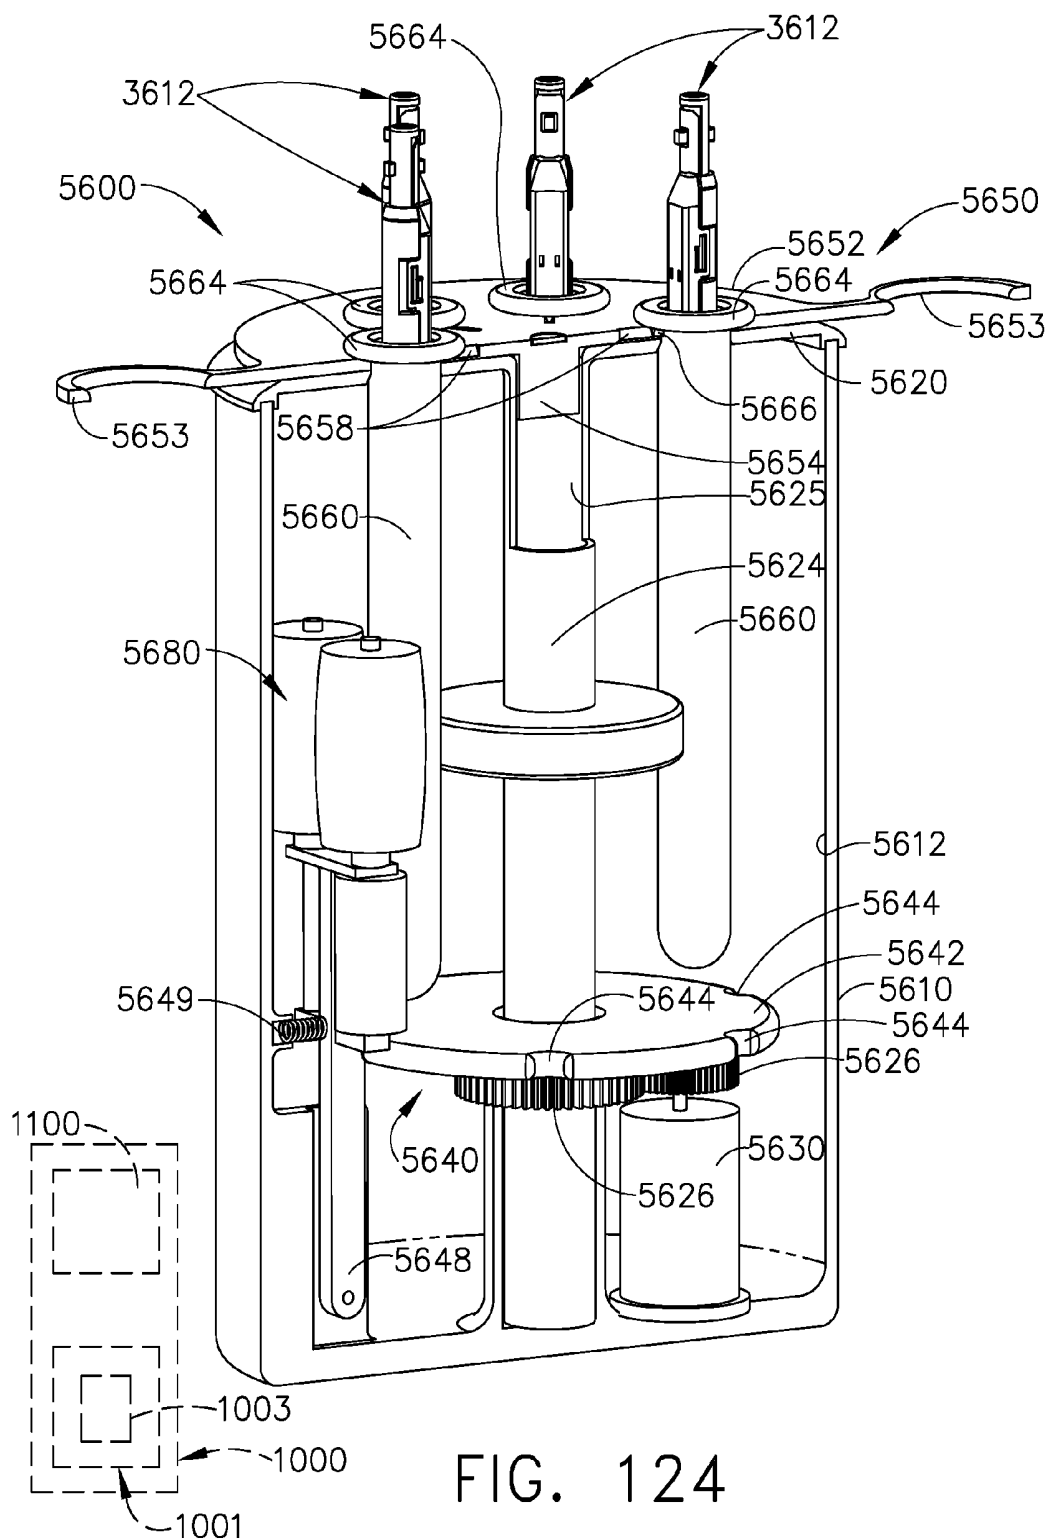


FIG. 124

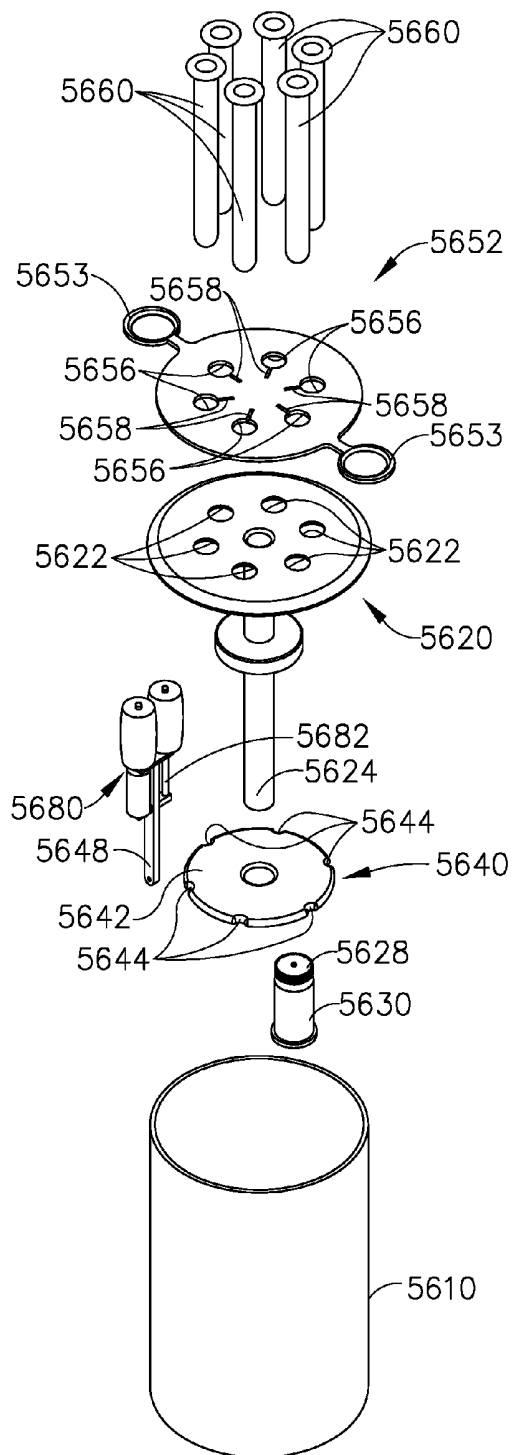


FIG. 125

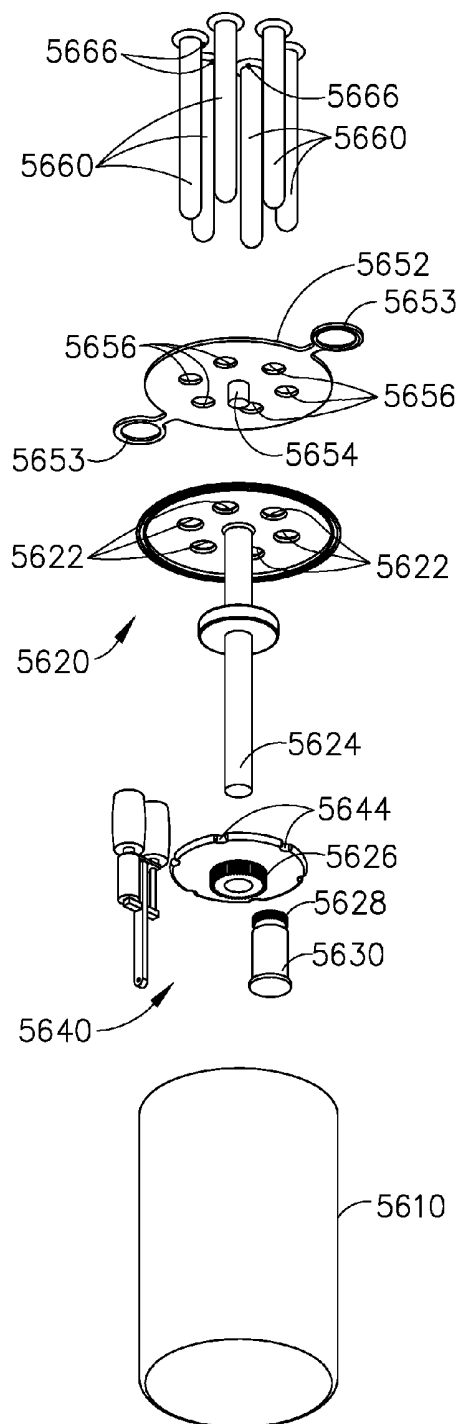


FIG. 126

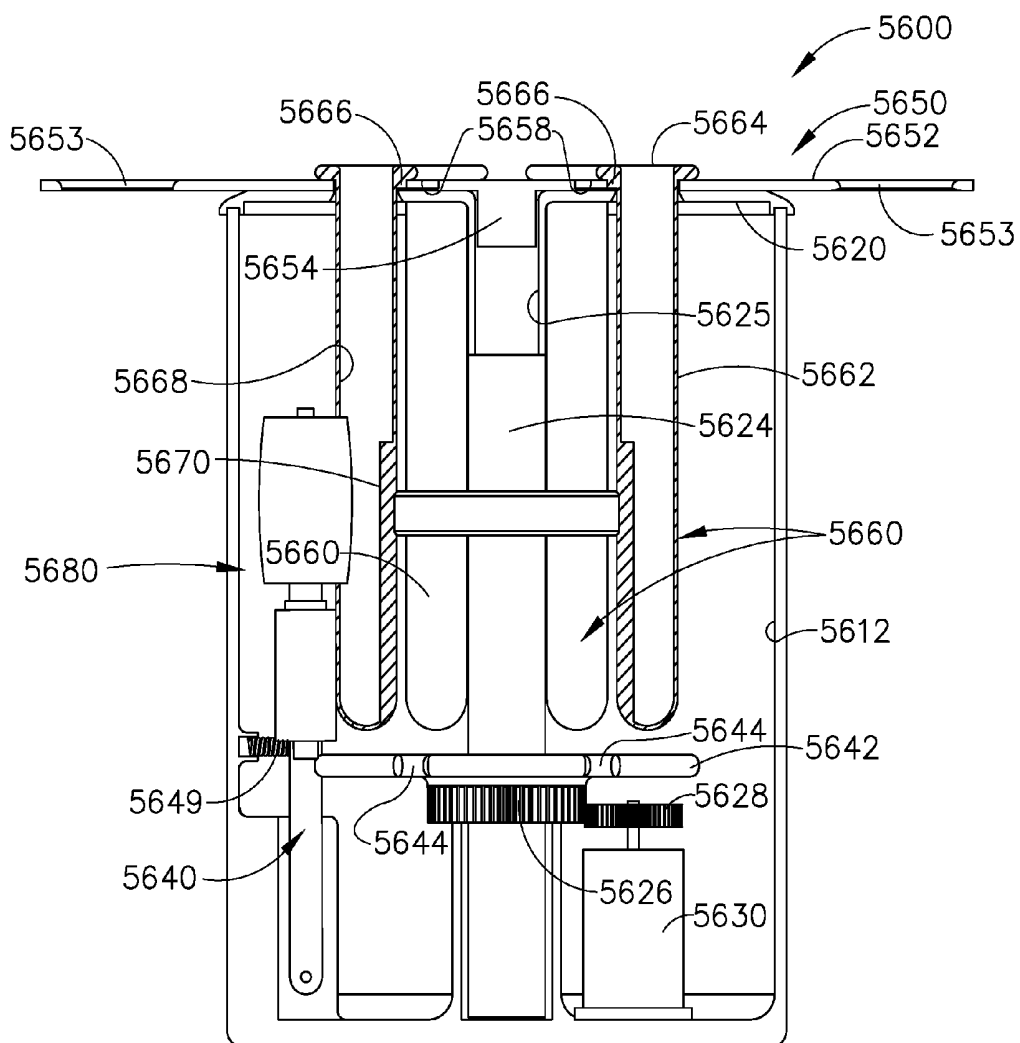


FIG. 127

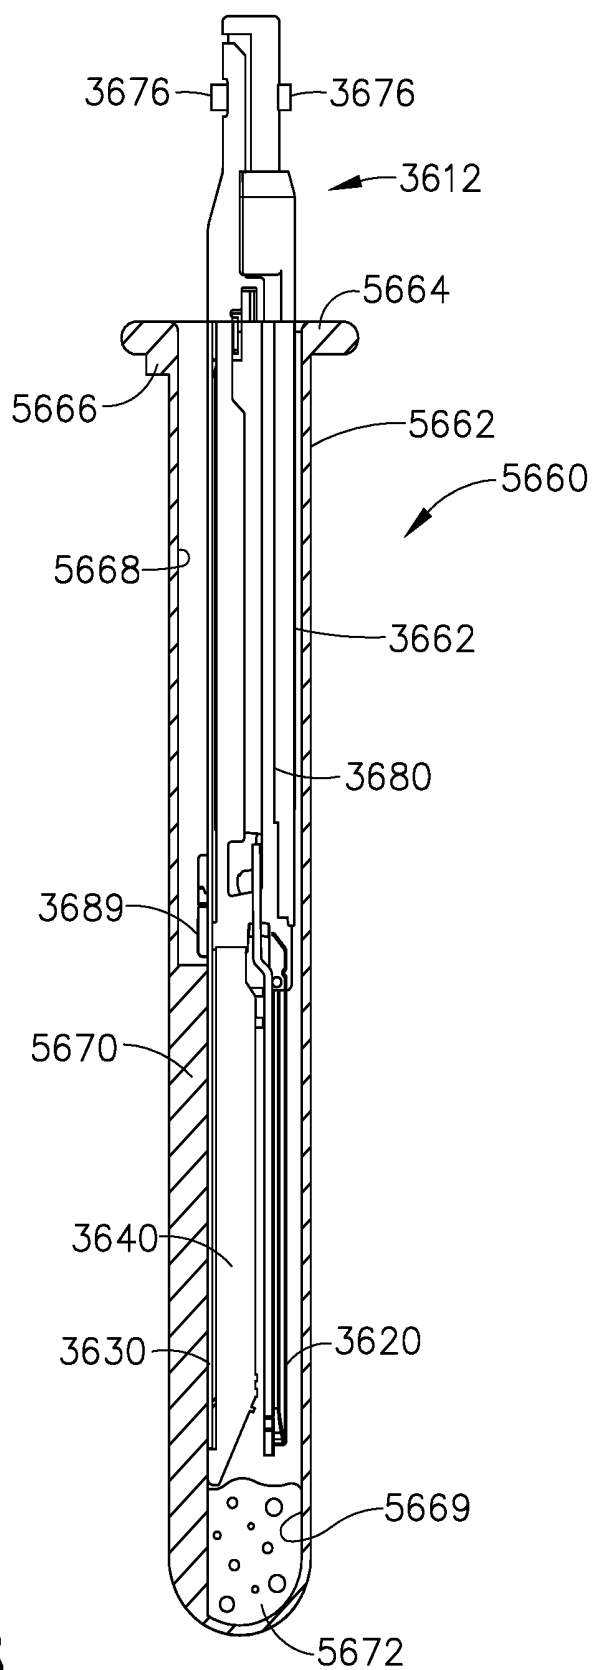


FIG. 128

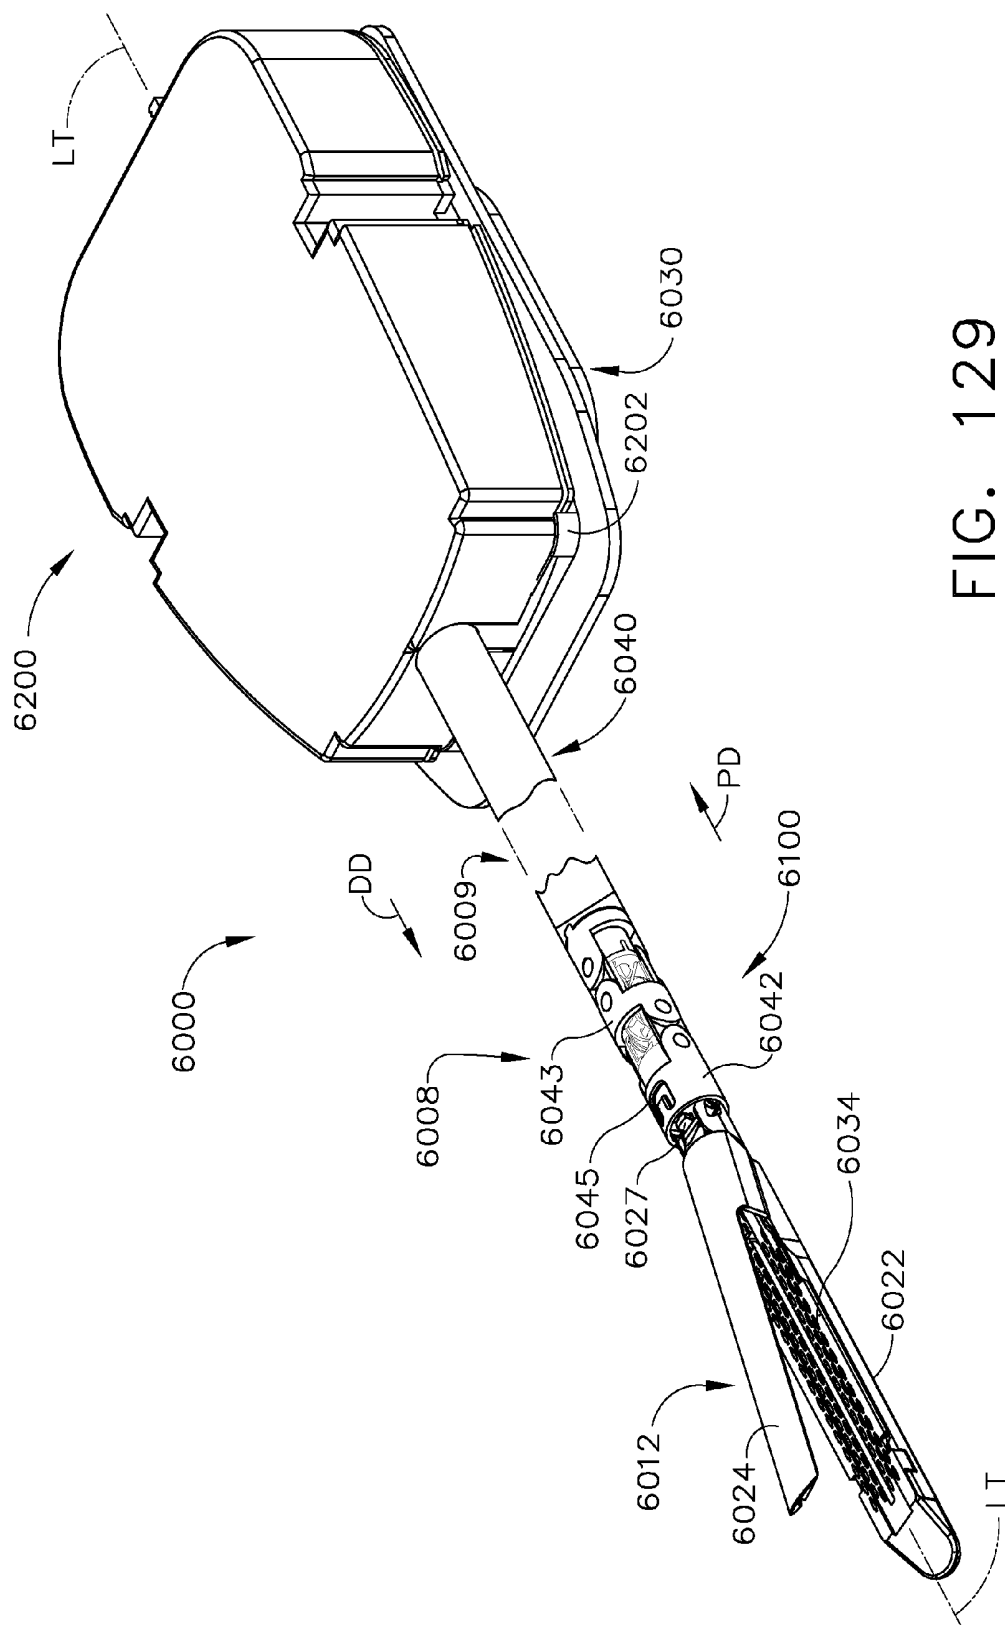
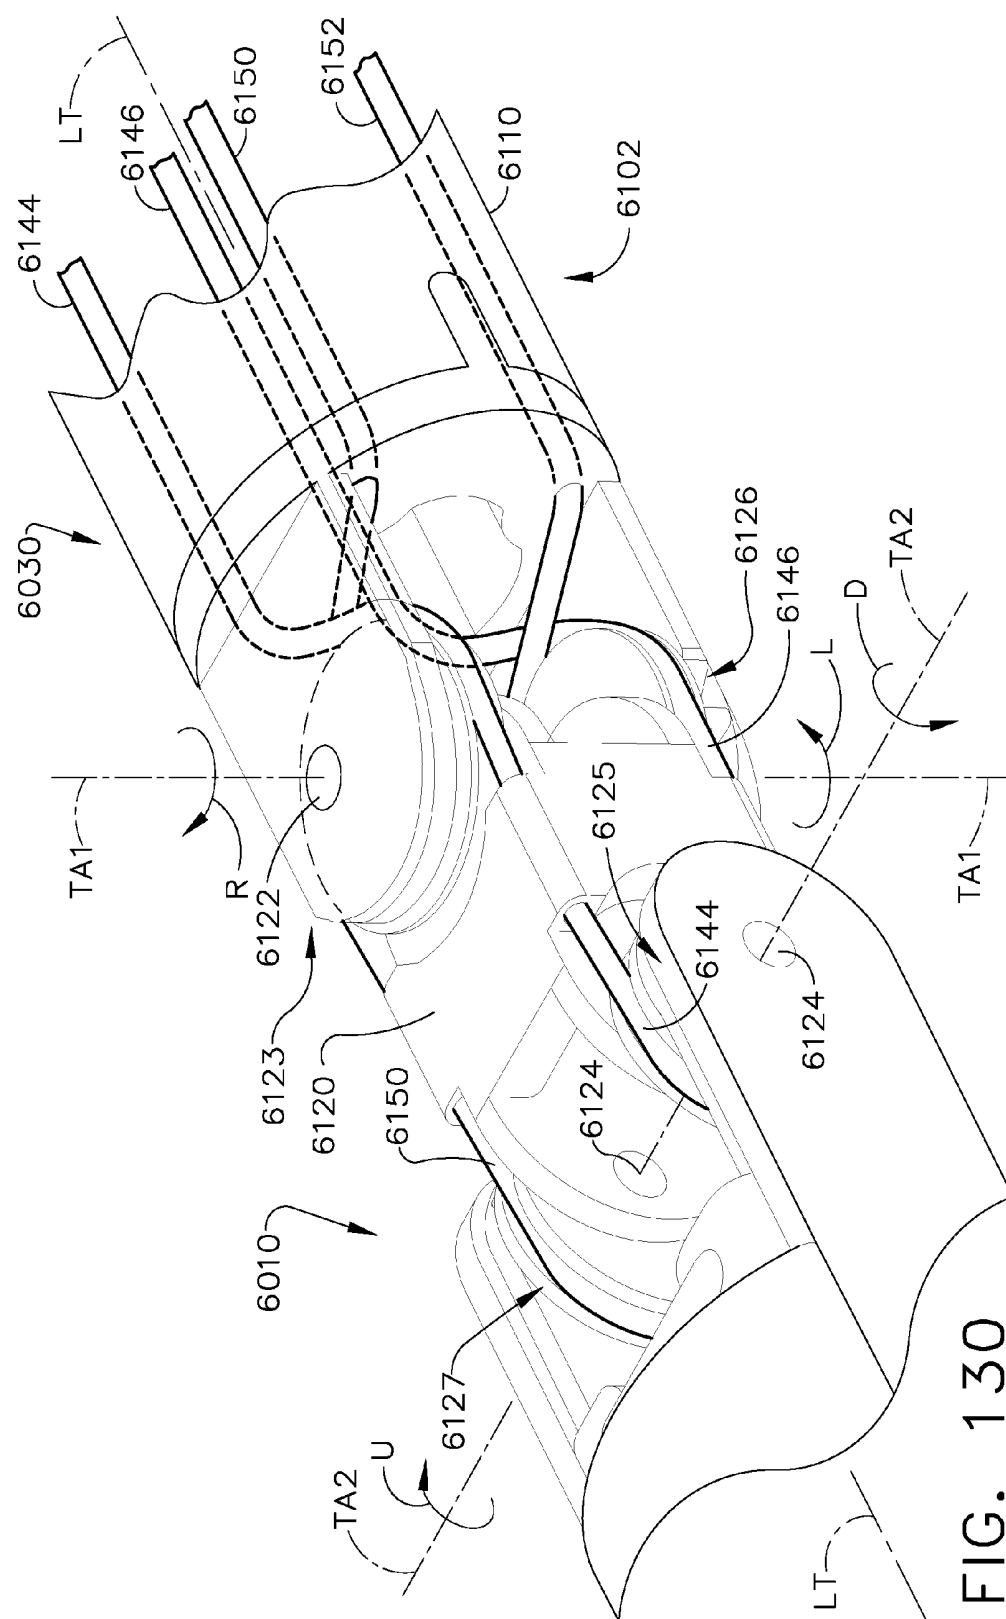
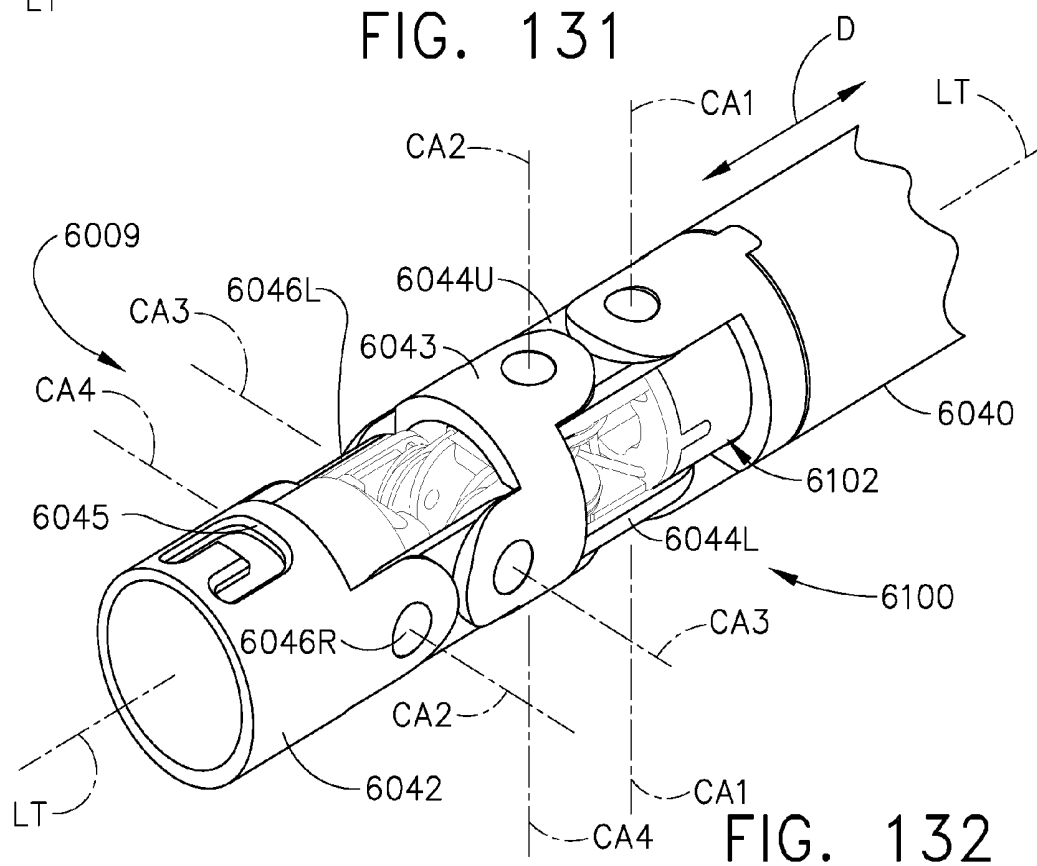
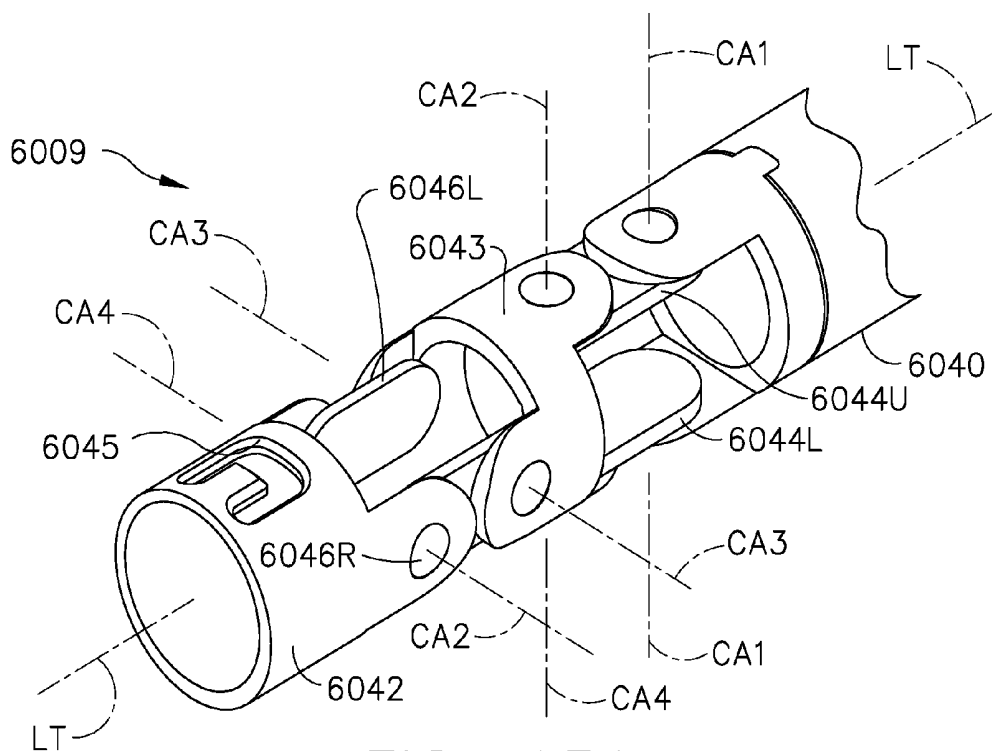


FIG. 129





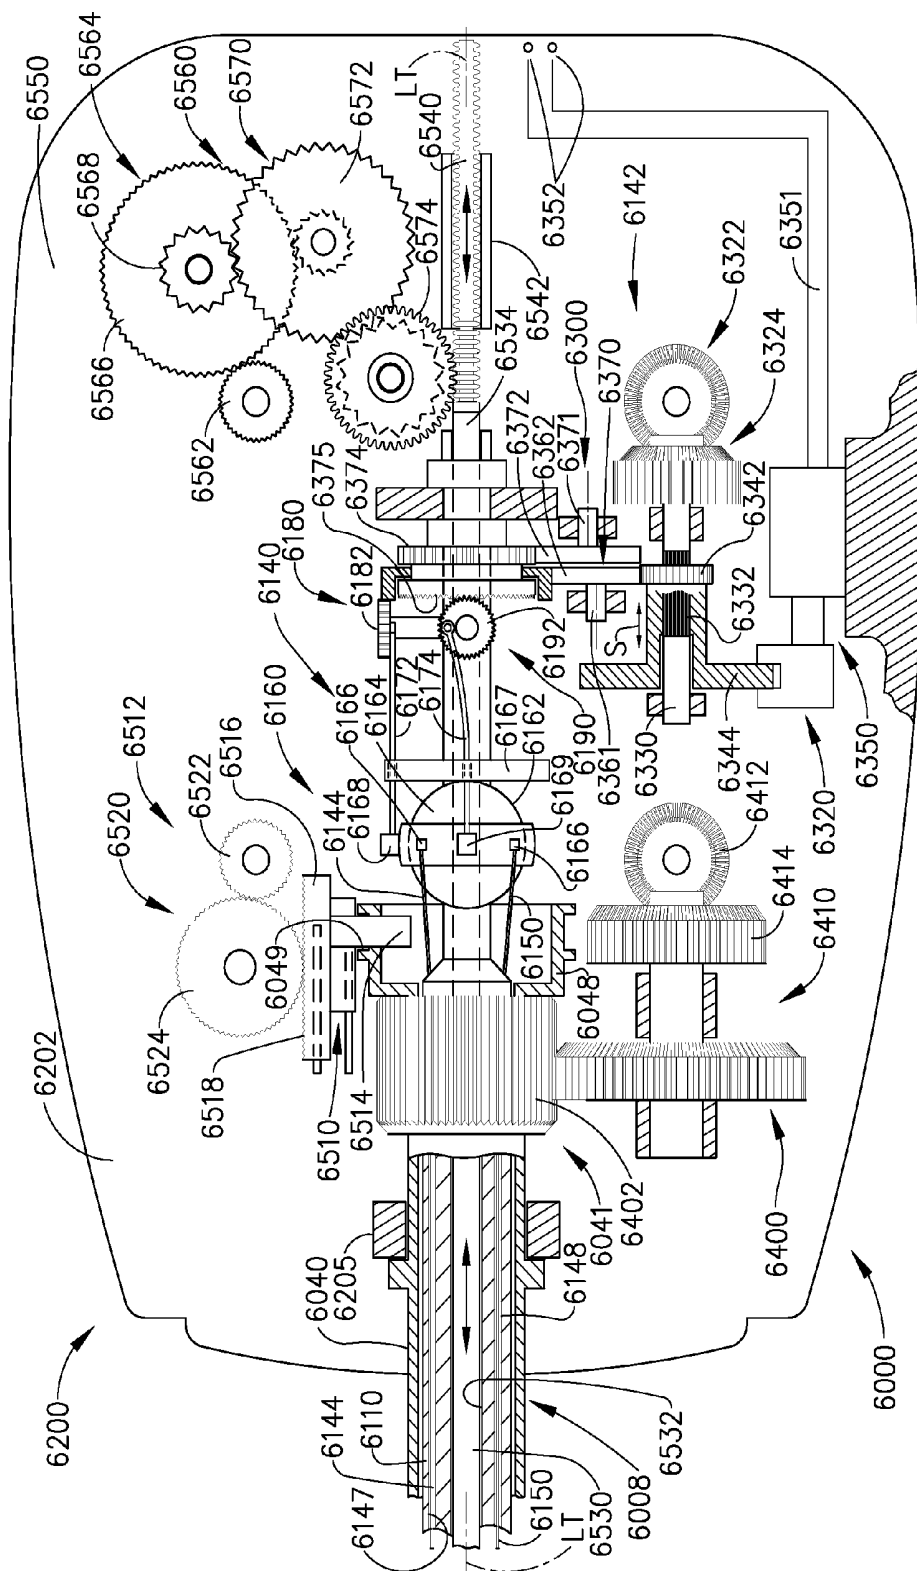


FIG. 133

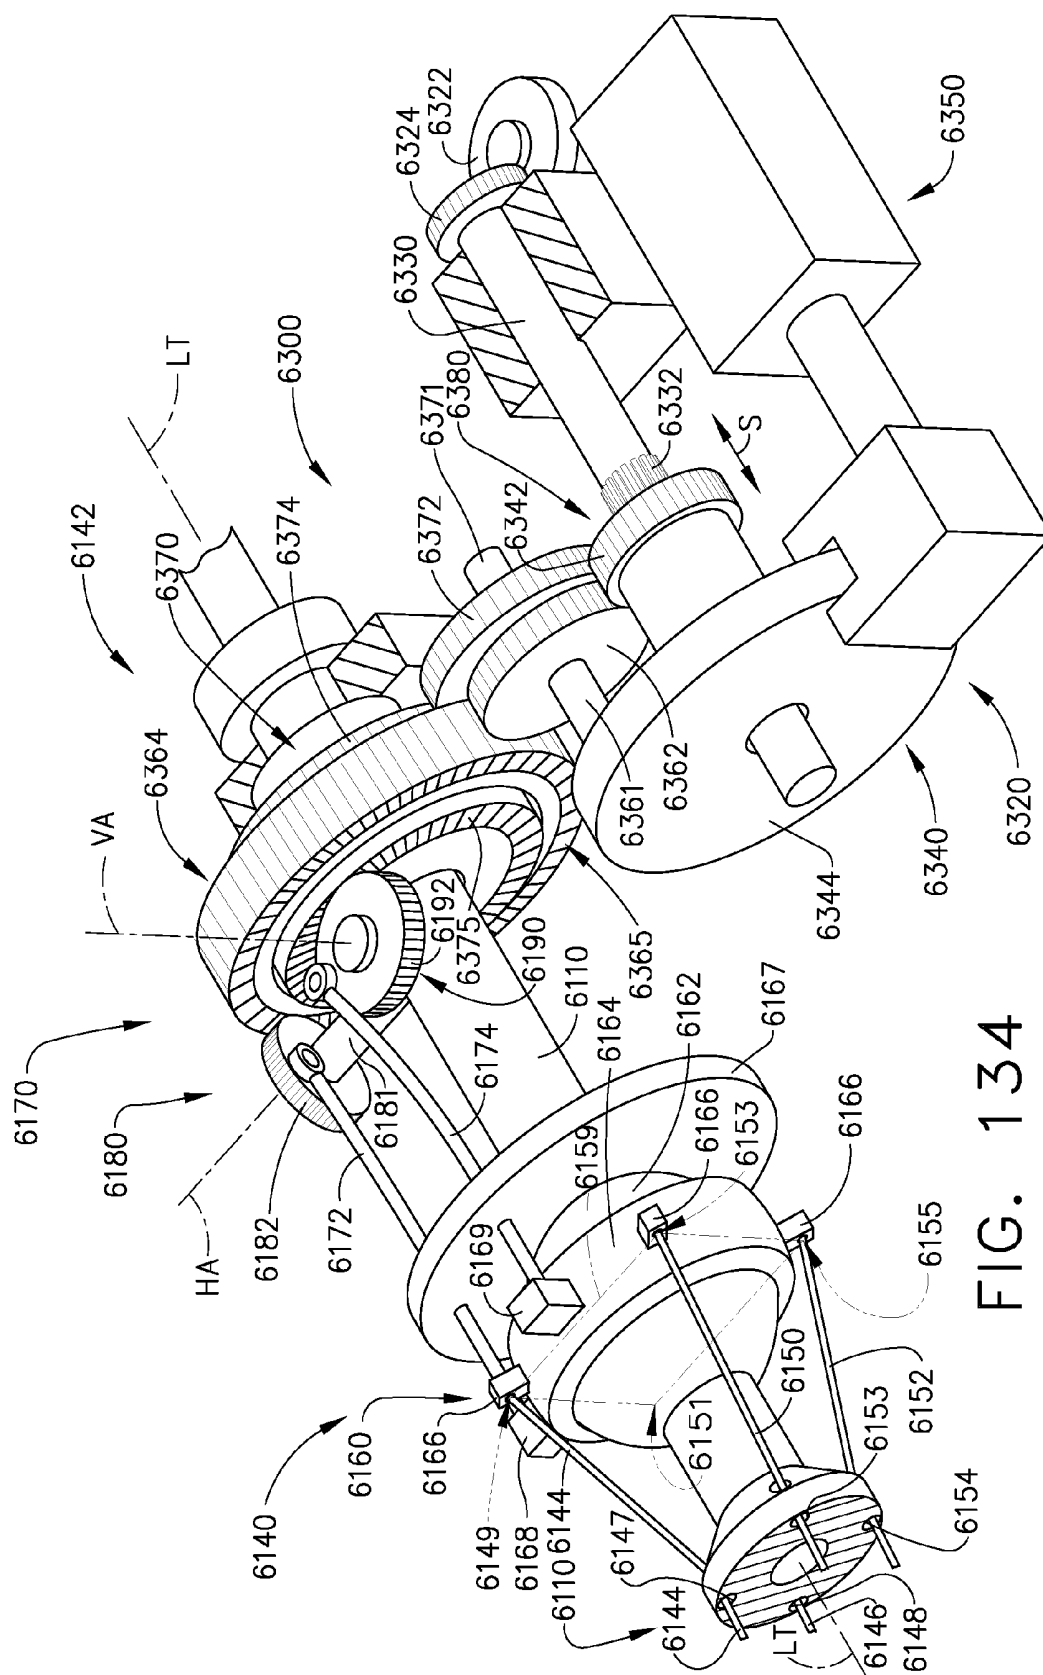


FIG. 134

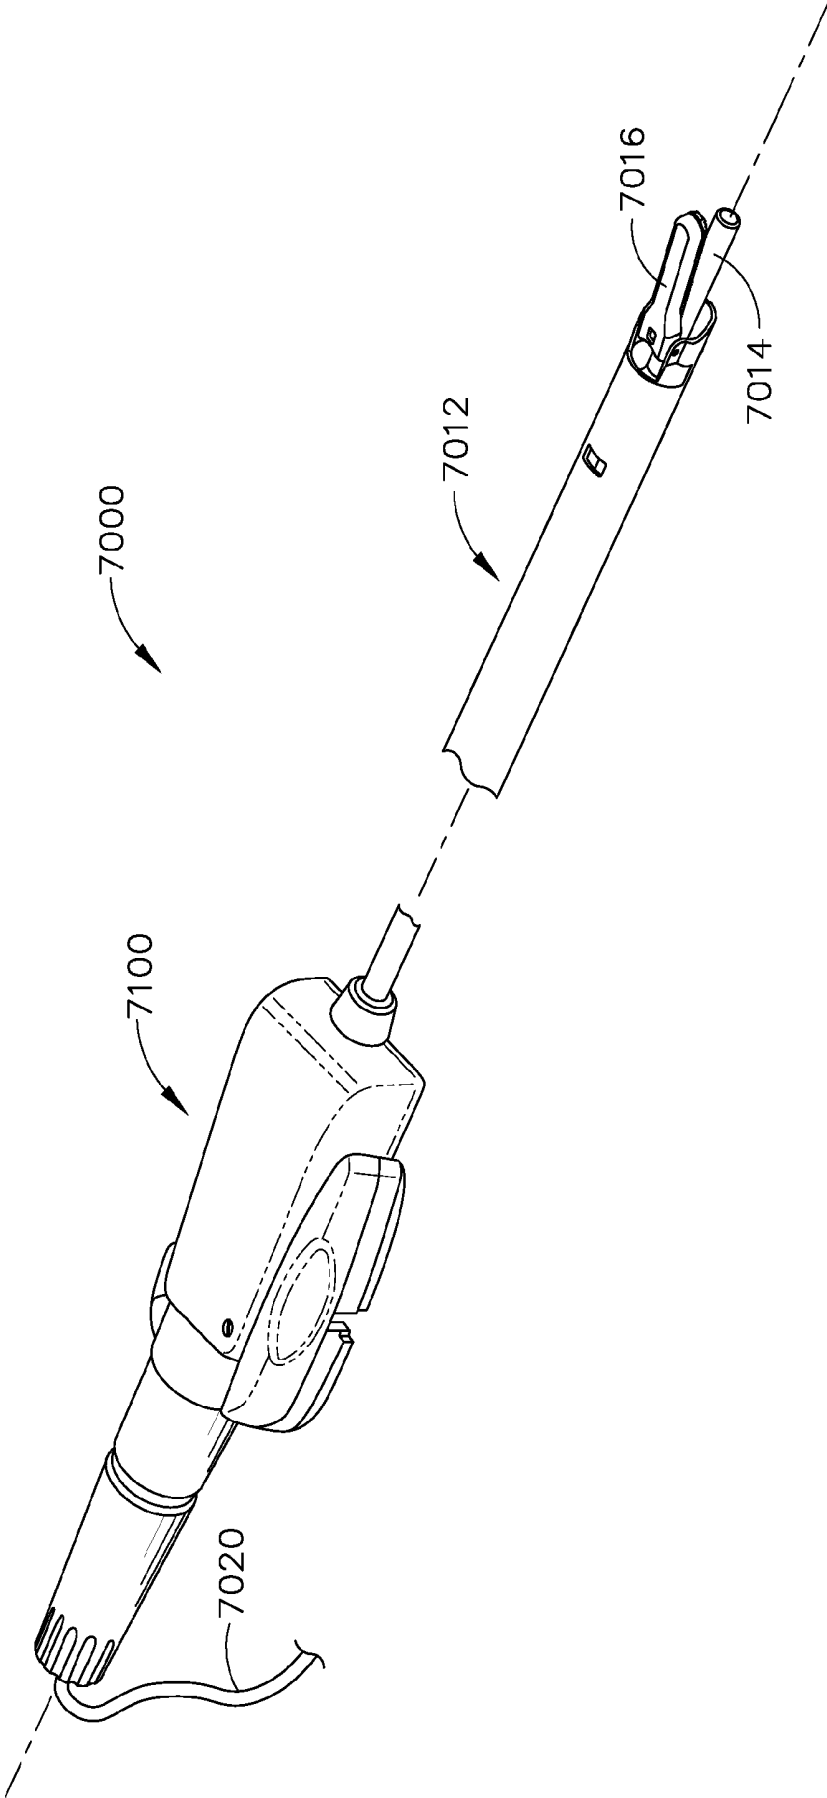


FIG. 135

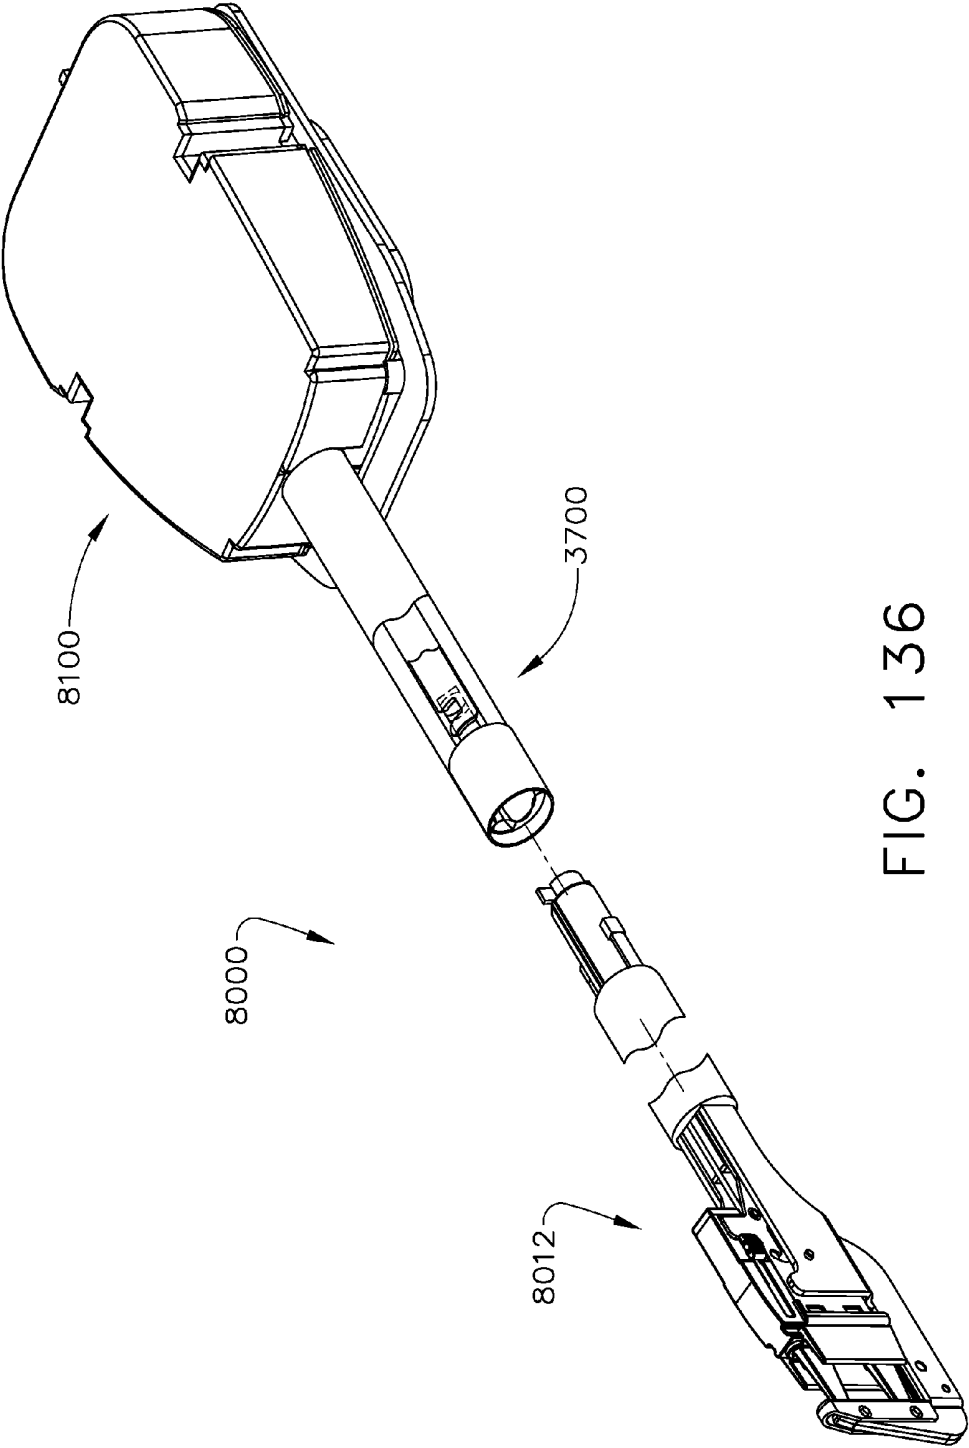


FIG. 136

ROBOTICALLY-DRIVEN SURGICAL INSTRUMENT WITH E-BEAM DRIVER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation application claiming priority under 35 U.S.C. §120 to U.S. patent application Ser. No. 14/867,362, entitled ROBOTICALLY-DRIVEN SURGICAL INSTRUMENT WITH E-BEAM DRIVER, filed Sep. 28, 2015, now U.S. Patent Application Publication No. 2016/0015391, which is a continuation application claiming priority under 35 U.S.C. §120 to U.S. patent application Ser. No. 14/745,858, entitled ROBOTICALLY-DRIVEN SURGICAL INSTRUMENT WITH E-BEAM DRIVER, filed Jun. 22, 2015, now U.S. Patent Application Publication No. 2015/0289873, which is a continuation application claiming priority under 35 U.S.C. §120 to U.S. patent application Ser. No. 13/118,246, entitled ROBOTICALLY-DRIVEN SURGICAL INSTRUMENT WITH E-BEAM DRIVER, filed May 27, 2011, which issued on Jun. 23, 2015 as U.S. Pat. No. 9,060,770, the entire disclosures of which are hereby incorporated by reference herein.

FIELD OF THE INVENTION

[0002] The present invention relates in general to surgical instruments that are suitable for endoscopically inserting an end effector that is actuated by a longitudinally driven firing member, and more particularly a surgical stapling and severing instrument that has an articulating shaft.

BACKGROUND OF THE INVENTION

[0003] Endoscopic surgical instruments are often preferred over traditional open surgical devices since a smaller incision tends to reduce the post-operative recovery time and complications. Consequently, significant development has gone into a range of endoscopic surgical instruments that are suitable for precise placement of a distal end effector at a desired surgical site through a cannula of a trocar. These distal end effectors engage the tissue in a number of ways to achieve a diagnostic or therapeutic effect (e.g., endocutter, grasper, cutter, staplers, clip applier, access device, drug/gene therapy delivery device, and energy device using ultrasound, RF, laser, etc.).

[0004] Positioning the end effector is constrained by the trocar. Generally these endoscopic surgical instruments include a long shaft between the end effector and a handle portion manipulated by the clinician. This long shaft enables insertion to a desired depth and rotation about the longitudinal axis of the shaft, thereby positioning the end effector to a degree. With judicious placement of the trocar and use of graspers, for instance, through another trocar, often this amount of positioning is sufficient. Surgical stapling and severing instruments, such as described in U.S. Pat. No. 5,465,895, are an example of an endoscopic surgical instrument that successfully positions an end effector by insertion and rotation.

[0005] More recently, U.S. patent application Ser. No. 10/443,617, entitled SURGICAL STAPLING INSTRUMENT INCORPORATING AN E-BEAM FIRING MECHANISM, filed on May 20, 2003, now U.S. Pat. No. 6,978,921, which has been incorporated by reference in its entirety, describes an improved “E-beam” firing bar for severing tissue and actuating staples. Some of the additional

advantages include affirmatively spacing the jaws of the end effector, or more specifically a staple applying assembly, even if slightly too much or too little tissue is clamped for optimal staple formation. Moreover, the E-beam firing bar engages the end effector and staple cartridge in a way that enables several beneficial lockouts to be incorporated.

[0006] Depending upon the nature of the operation, it may be desirable to further adjust the positioning of the end effector of an endoscopic surgical instrument. In particular, it is often desirable to orient the end effector at an axis transverse to the longitudinal axis of the shaft of the instrument. The transverse movement of the end effector relative to the instrument shaft is conventionally referred to as “articulation”. This is typically accomplished by a pivot (or articulation) joint being placed in the extended shaft just proximal to the staple applying assembly. This allows the surgeon to articulate the staple applying assembly remotely to either side for better surgical placement of the staple lines and easier tissue manipulation and orientation. This articulated positioning permits the clinician to more easily engage tissue in some instances, such as behind an organ. In addition, articulated positioning advantageously allows an endoscope to be positioned behind the end effector without being blocked by the instrument shaft.

[0007] Approaches to articulating a surgical stapling and severing instrument tend to be complicated by integrating control of the articulation along with the control of closing the end effector to clamp tissue and fire the end effector (i.e., stapling and severing) within the small diameter constraints of an endoscopic instrument. Generally, the three control motions are all transferred through the shaft as longitudinal translations. For instance, U.S. Pat. No. 5,673,840 discloses an accordion-like articulation mechanism (“flex-neck”) that is articulated by selectively drawing back one of two connecting rods through the implement shaft, each rod offset respectively on opposite sides of the shaft centerline. The connecting rods ratchet through a series of discrete positions.

[0008] Another example of longitudinal control of an articulation mechanism is U.S. Pat. No. 5,865,361 that includes an articulation link offset from a camming pivot such that pushing or pulling longitudinal translation of the articulation link effects articulation to a respective side. Similarly, U.S. Pat. No. 5,797,537 discloses a similar rod passing through the shaft to effect articulation.

[0009] In commonly-owned U.S. patent application Ser. No. 10/615,973, entitled SURGICAL INSTRUMENT INCORPORATING AN ARTICULATION MECHANISM HAVING ROTATION ABOUT THE LONGITUDINAL AXIS, now U.S. Pat. No. 7,111,769, the disclosure of which is hereby incorporated by reference in its entirety, a rotational motion is used to transfer articulation motion as an alternative to a longitudinal motion.

[0010] In the application entitled SURGICAL STAPLING INSTRUMENT INCORPORATING AN E-BEAM FIRING MECHANISM, U.S. patent application Ser. No. 10/443,617, filed on May 20, 2003, now U.S. Pat. No. 6,978,921, the disclosure of which was previously incorporated by reference in its entirety, a surgical severing and stapling instrument, suitable for laparoscopic and endoscopic clinical procedures, clamps tissue within an end effector of an elongate channel pivotally opposed by an anvil. An E-beam firing bar moves distally through the clamped end effector to sever tissue and to drive staples on each side of the cut. The E-beam firing bar affirmatively spaces the anvil from the elongate channel to

assure properly formed closed staples, especially when an amount of tissue is clamped that is inadequate to space the end effector. In particular, an upper pin of the firing bar longitudinally moves through an anvil slot and a channel slot is captured between a lower cap and a middle pin of the firing bar to assure a minimum spacing. While this E-beam firing bar has a number of advantages, additional features are desirable to enhance manufacturability and to minimize dimensional variations.

[0011] Consequently, a significant need exists for a surgical instrument with a firing bar that advantageously assures proper spacing between clamped jaws of an end effector and which facilitates articulation of its shaft.

SUMMARY

[0012] The invention overcomes the above-noted and other deficiencies of the prior art by providing a firing mechanism that affirmatively vertically spaces an end effector of a surgical stapling and severing instrument. Thus, the instrument structurally assures adequate spacing to achieve proper stapling, even in instances where too little tissue is clamped in the end effector. Integrally forming these features into an E-beam that includes a cutting edge realizes consistent spacing and performance as the E-beam fires through an end effector such as a severing and stapling assembly. Further, proximally attaching a separate, thinned firing bar to the E-beam enhances use in articulating surgical instruments wherein reduced cross sectional area and the ability to flex in a plane of articulation are desirable.

[0013] In one aspect of the invention, a surgical instrument includes a handle portion operable to produce a firing motion that actuates an implement portion. This implement portion has an elongate channel that receives a staple cartridge opposed by a pivotally attached anvil. A firing device includes a distally presented cutting edge longitudinally received between the elongate channel and the anvil, an upper member engageable to the anvil channel, a lower member engaging the channel slot, and a middle member operable to actuate the wedge sled, which is integral to the staple cartridge. The middle member advantageously opposes pinching of the end effector, assuring proper staple formation even when an otherwise too small amount of tissue has been clamped. These spacing and cutting features are advantageously formed into an E-beam while flexibility for articulation is provided by a thinned firing bar attached to the E-beam.

[0014] In another general aspect of at least one embodiment of the present invention, there is provided a surgical instrument that comprises an implement portion that is responsive to firing motions applied thereto from a robotic system. In various embodiments, the implement portion comprises an elongate channel that is configured for attachment to an elongated shaft that operably interfaces with the robotic system and includes a channel slot. A staple cartridge is received by the elongate channel and incorporates a proximally positioned wedge member that is aligned to cam upward a driver supporting a staple. An anvil is pivotally coupled to the elongate channel and includes an anvil channel that comprises a vertical slot that is inwardly open along a longitudinal axis of the anvil. The anvil further comprising left and right rectangular prism-shaped recesses communicating with, bisected by, and transverse to the vertical slot, wherein the left and right rectangular prism-shaped recesses extend substantially along the longitudinal length of the vertical slot. Various embodiments further include a firing device that has a distally

presented cutting edge that is longitudinally received between the elongate channel and the vertical slot of the anvil channel of the anvil. Various embodiments further include an upper member that is comprised of left and right lateral upper pins that are sized to slidably engage upper and lower inner surfaces of the left and right rectangular-shaped recesses of the anvil channel. Various embodiments further include a lower member that engages the channel slot and a middle member that is operable to actuate the staple cartridge by distally translating the wedge member of the staple cartridge. In various embodiments, the firing device positively engages both the elongate channel and the anvil during longitudinal firing travel to provide spacing therebetween for staple formation. Engagement of the firing device during firing maintains vertical spacing between the elongate channel and the anvil and serves to resist both pinching due to an inadequate clamped tissue and partial opening due to an excessive amount of clamped tissue.

[0015] In accordance with still another general aspect of an embodiment of the present invention, there is provided a surgical instrument that comprises an implement portion that is responsive to firing motions from a robotic system that is in communication therewith. The implement portion is diametrically dimensioned for endo-surgical use and in at least one form comprises an elongate channel that is coupled to an elongated shaft that operably interfaces with the robotic system. The elongate channel has a channel slot therein and an anvil is pivotally coupled to the elongate channel. The anvil is responsive to closing motions generated by the robotic system and which are applied to the anvil by the elongated shaft. The anvil includes an anvil channel. In at least one embodiment, the implement portion further comprises a firing device that includes a distally presented cutting edge that is longitudinally received between the elongate channel and the anvil. The firing device is configured to affirmatively space the anvil from the elongate channel during longitudinal travel between the anvil and elongate channel, wherein the firing device is configured to affirmatively space the anvil from the elongate channel during longitudinal travel between the anvil and elongate channel by including an upper member having an upper surface and a lower surface that longitudinally slidably engage the anvil.

[0016] In accordance with another general aspect of at least one embodiment of the present invention there is provided a surgical instrument that includes a robotic system that is operable to produce a plurality of control motions including a firing motion. The embodiment further includes an implement portion that is responsive to the firing motion from the robotic system. In various embodiments, the implement portion comprises an elongate channel that is coupled to the robotic system and includes a channel slot. A staple cartridge is received by the elongate channel and incorporates a proximally positioned wedge member that is aligned to cam upward a driver supporting a staple. An anvil is pivotally coupled to the elongate channel and includes an anvil channel. An embodiment includes a firing device that has a distally presented cutting edge that is longitudinally received between the elongate channel and the anvil. An upper member is engageable to the anvil channel and a lower member engages the channel slot. A middle member is operable to actuate the staple cartridge by distally translating the edge member of the staple cartridge. The firing device is configured to positively engage both the elongate channel and the anvil during longitudinal firing travel to provide spacing therebetween for

staple formation. An articulation joint is proximally coupled to the elongate channel and a thinned firing strip is proximally attached to the firing device for transferring the firing motion from the robotic system through the articulation joint.

[0017] These and other objects and advantages of the present invention shall be made apparent from the accompanying drawings and the description thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention, and, together with the general description of the invention given above, and the detailed description of the embodiments given below, serve to explain the principles of the present invention.

[0019] FIG. 1 is a perspective view of an endoscopic surgical stapling instrument for surgical stapling and severing in an open, unarticulated state;

[0020] FIG. 2 is a left, front perspective view of an open staple applying assembly of the surgical stapling instrument of FIG. 1 with a right half portion of a replaceable staple cartridge included in a staple channel;

[0021] FIG. 3 is an exploded perspective view of the staple applying assembly of FIG. 2 with a complete replaceable staple cartridge and an alternative nonarticulating shaft configuration;

[0022] FIG. 4 is a perspective view of a two-piece knife and firing bar ("E-beam") of the staple applying assembly of FIG. 2;

[0023] FIG. 5 is a perspective view of a wedge sled of a staple cartridge of the staple applying assembly of FIG. 1;

[0024] FIG. 6 is a left side view in elevation taken in longitudinal cross section along a centerline line 6-6 of the staple applying assembly of FIG. 2;

[0025] FIG. 7 is a perspective view of the open staple applying assembly of FIG. 2 without the replaceable staple cartridge, a portion of the staple channel proximate to a middle pin of two-piece knife and firing bar, and without a distal portion of a staple channel;

[0026] FIG. 8 is a front view in elevation taken in cross section along line 8-8 of the staple applying assembly of FIG. 2 depicting internal staple drivers of the staple cartridge and portions of the two-piece knife and firing bar;

[0027] FIG. 9 is a left side view in elevation taken generally along the longitudinal axis of line 6-6 of a closed staple applying assembly of FIG. 2 to include center contact points between the two-piece knife and wedge sled but also laterally offset to show staples and staple drivers within the staple cartridge;

[0028] FIG. 10 is a left side detail view in elevation of the staple applying assembly of FIG. 9 with the two-piece knife retracted slightly more as typical for staple cartridge replacement;

[0029] FIG. 11 is a left side detail view in elevation of the staple applying assembly of FIG. 10 with the two-piece knife beginning to fire, corresponding to the configuration depicted in FIG. 9;

[0030] FIG. 12 is a left side cross-sectional view in elevation of the closed staple applying assembly of FIG. 9 after the two-piece knife and firing bar has distally fired;

[0031] FIG. 13 is a left side cross-sectional view in elevation of the closed staple applying assembly of FIG. 12 after firing of the staple cartridge and retraction of the two-piece knife;

[0032] FIG. 14 is a left side cross-sectional detail view in elevation of the staple applying assembly of FIG. 13 with the two-piece knife allowed to drop into a lockout position;

[0033] FIG. 15 is a top view in section taken along lines 15-15 of an articulation joint (flex neck) of the surgical stapling instrument of FIG. 1;

[0034] FIG. 16 is a front view in elevation taken in vertical cross section along lines 16-16 of the articulation joint of FIG. 15, showing electroactive polymer (EAP) plate articulation actuators and EAP support plates for a firing bar;

[0035] FIG. 17 is a top view in section along lines 15-15 of the articulation joint of FIG. 16 after articulation;

[0036] FIG. 18 is a perspective view of the articulation joint of FIG. 15;

[0037] FIG. 19 is a perspective view of one robotic controller embodiment;

[0038] FIG. 20 is a perspective view of one robotic surgical arm cart/manipulator of a robotic system operably supporting a plurality of surgical tool embodiments of the present invention;

[0039] FIG. 21 is a side view of the robotic surgical arm cart/manipulator depicted in FIG. 20;

[0040] FIG. 22 is a perspective view of an exemplary cart structure with positioning linkages for operably supporting robotic manipulators that may be used with various surgical tool embodiments of the present invention;

[0041] FIG. 23 is a perspective view of a surgical tool embodiment of the present invention;

[0042] FIG. 24 is an exploded assembly view of an adapter and tool holder arrangement for attaching various surgical tool embodiments to a robotic system;

[0043] FIG. 25 is a side view of the adapter shown in FIG. 24;

[0044] FIG. 26 is a bottom view of the adapter shown in FIG. 24;

[0045] FIG. 27 is a top view of the adapter of FIGS. 24 and 25;

[0046] FIG. 28 is a partial bottom perspective view of the surgical tool embodiment of FIG. 23;

[0047] FIG. 29 is a partial exploded view of a portion of an articulatable surgical end effector embodiment of the present invention;

[0048] FIG. 30 is a perspective view of the surgical tool embodiment of FIG. 28 with the tool mounting housing removed;

[0049] FIG. 31 is a rear perspective view of the surgical tool embodiment of FIG. 28 with the tool mounting housing removed;

[0050] FIG. 32 is a front perspective view of the surgical tool embodiment of FIG. 28 with the tool mounting housing removed;

[0051] FIG. 33 is a partial exploded perspective view of the surgical tool embodiment of FIG. 32;

[0052] FIG. 34 is a partial cross-sectional side view of the surgical tool embodiment of FIG. 28;

[0053] FIG. 35 is an enlarged cross-sectional view of a portion of the surgical tool depicted in FIG. 34;

[0054] FIG. 36 is an exploded perspective view of a portion of the tool mounting portion of the surgical tool embodiment depicted in FIG. 28;

[0055] FIG. 37 is an enlarged exploded perspective view of a portion of the tool mounting portion of FIG. 36;

[0056] FIG. 38 is a partial cross-sectional view of a portion of the elongated shaft assembly of the surgical tool of FIG. 28;

[0057] FIG. 39 is a side view of a half portion of a closure nut embodiment of a surgical tool embodiment of the present invention;

[0058] FIG. 40 is a perspective view of another surgical tool embodiment of the present invention;

[0059] FIG. 41 is a cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 40 with the anvil in the open position and the closure clutch assembly in a neutral position;

[0060] FIG. 42 is another cross-sectional side view of the surgical end effector and elongated shaft assembly shown in FIG. 41 with the clutch assembly engaged in a closure position;

[0061] FIG. 43 is another cross-sectional side view of the surgical end effector and elongated shaft assembly shown in FIG. 41 with the clutch assembly engaged in a firing position;

[0062] FIG. 44 is a top view of a portion of a tool mounting portion embodiment of the present invention;

[0063] FIG. 45 is a perspective view of another surgical tool embodiment of the present invention;

[0064] FIG. 46 is a cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 45 with the anvil in the open position;

[0065] FIG. 47 is another cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 45 with the anvil in the closed position;

[0066] FIG. 48 is a perspective view of a closure drive nut and portion of a knife bar embodiment of the present invention;

[0067] FIG. 49 is a top view of another tool mounting portion embodiment of the present invention;

[0068] FIG. 50 is a perspective view of another surgical tool embodiment of the present invention;

[0069] FIG. 51 is a cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 50 with the anvil in the open position;

[0070] FIG. 52 is another cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 51 with the anvil in the closed position;

[0071] FIG. 53 is a cross-sectional view of a mounting collar embodiment of a surgical tool embodiment of the present invention showing the knife bar and distal end portion of the closure drive shaft;

[0072] FIG. 54 is a cross-sectional view of the mounting collar embodiment of FIG. 53;

[0073] FIG. 55 is a top view of another tool mounting portion embodiment of another surgical tool embodiment of the present invention;

[0074] FIG. 55A is an exploded perspective view of a portion of a gear arrangement of another surgical tool embodiment of the present invention;

[0075] FIG. 55B is a cross-sectional perspective view of the gear arrangement shown in FIG. 55A;

[0076] FIG. 56 is a cross-sectional side view of a portion of a surgical end effector and elongated shaft assembly of another surgical tool embodiment of the present invention employing a pressure sensor arrangement with the anvil in the open position;

[0077] FIG. 57 is another cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 56 with the anvil in the closed position;

[0078] FIG. 58 is a side view of a portion of another surgical tool embodiment of the present invention in relation to a tool holder portion of a robotic system with some of the components thereof shown in cross-section;

[0079] FIG. 59 is a side view of a portion of another surgical tool embodiment of the present invention in relation to a tool holder portion of a robotic system with some of the components thereof shown in cross-section;

[0080] FIG. 60 is a side view of a portion of another surgical tool embodiment of the present invention with some of the components thereof shown in cross-section;

[0081] FIG. 61 is a side view of a portion of another surgical end effector embodiment of a portion of a surgical tool embodiment of the present invention with some components thereof shown in cross-section;

[0082] FIG. 62 is a side view of a portion of another surgical end effector embodiment of a portion of a surgical tool embodiment of the present invention with some components thereof shown in cross-section;

[0083] FIG. 63 is a side view of a portion of another surgical end effector embodiment of a portion of a surgical tool embodiment of the present invention with some components thereof shown in cross-section;

[0084] FIG. 64 is an enlarged cross-sectional view of a portion of the end effector of FIG. 63;

[0085] FIG. 65 is another cross-sectional view of a portion of the end effector of FIGS. 63 and 64;

[0086] FIG. 66 is a cross-sectional side view of a portion of a surgical end effector and elongated shaft assembly of another surgical tool embodiment of the present invention with the anvil in the open position;

[0087] FIG. 67 is an enlarged cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIG. 66;

[0088] FIG. 68 is another cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of FIGS. 66 and 67 with the anvil thereof in the closed position;

[0089] FIG. 69 is an enlarged cross-sectional side view of a portion of the surgical end effector and elongated shaft assembly of the surgical tool embodiment of FIGS. 66-68;

[0090] FIG. 70 is a top view of a tool mounting portion embodiment of a surgical tool embodiment of the present invention;

[0091] FIG. 71 is a perspective assembly view of another surgical tool embodiment of the present invention;

[0092] FIG. 72 is a front perspective view of a disposable loading unit arrangement that may be employed with various surgical tool embodiments of the present invention;

[0093] FIG. 73 is a rear perspective view of the disposable loading unit of FIG. 72;

[0094] FIG. 74 is a bottom perspective view of the disposable loading unit of FIGS. 72 and 73;

[0095] FIG. 75 is a bottom perspective view of another disposable loading unit embodiment that may be employed with various surgical tool embodiments of the present invention;

[0096] FIG. 76 is an exploded perspective view of a mounting portion of a disposable loading unit depicted in FIGS. 72-74;

[0097] FIG. 77 is a perspective view of a portion of a disposable loading unit and an elongated shaft assembly embodiment of a surgical tool embodiment of the present invention with the disposable loading unit in a first position;

[0098] FIG. 78 is another perspective view of a portion of the disposable loading unit and elongated shaft assembly of FIG. 77 with the disposable loading unit in a second position;

[0099] FIG. 79 is a cross-sectional view of a portion of the disposable loading unit and elongated shaft assembly embodiment depicted in FIGS. 77 and 78;

[0100] FIG. 80 is another cross-sectional view of the disposable loading unit and elongated shaft assembly embodiment depicted in FIGS. 77-79;

[0101] FIG. 81 is a partial exploded perspective view of a portion of another disposable loading unit embodiment and an elongated shaft assembly embodiment of a surgical tool embodiment of the present invention;

[0102] FIG. 82 is a partial exploded perspective view of a portion of another disposable loading unit embodiment and an elongated shaft assembly embodiment of a surgical tool embodiment of the present invention;

[0103] FIG. 83 is another partial exploded perspective view of the disposable loading unit embodiment and an elongated shaft assembly embodiment of FIG. 82;

[0104] FIG. 84 is a top view of another tool mounting portion embodiment of a surgical tool embodiment of the present invention;

[0105] FIG. 85 is a side view of another surgical tool embodiment of the present invention with some of the components thereof shown in cross-section and in relation to a robotic tool holder of a robotic system;

[0106] FIG. 86 is an exploded assembly view of a surgical end effector embodiment that may be used in connection with various surgical tool embodiments of the present invention;

[0107] FIG. 87 is a side view of a portion of a cable-driven system for driving a cutting instrument employed in various surgical end effector embodiments of the present invention;

[0108] FIG. 88 is a top view of the cable-driven system and cutting instrument of FIG. 87;

[0109] FIG. 89 is a top view of a cable drive transmission embodiment of the present invention in a closure position;

[0110] FIG. 90 is another top view of the cable drive transmission embodiment of FIG. 89 in a neutral position;

[0111] FIG. 91 is another top view of the cable drive transmission embodiment of FIGS. 89 and 90 in a firing position;

[0112] FIG. 92 is a perspective view of the cable drive transmission embodiment in the position depicted in FIG. 89;

[0113] FIG. 93 is a perspective view of the cable drive transmission embodiment in the position depicted in FIG. 90;

[0114] FIG. 94 is a perspective view of the cable drive transmission embodiment in the position depicted in FIG. 91;

[0115] FIG. 95 is a perspective view of another surgical tool embodiment of the present invention;

[0116] FIG. 96 is a side view of a portion of another cable-driven system embodiment for driving a cutting instrument employed in various surgical end effector embodiments of the present invention;

[0117] FIG. 97 is a top view of the cable-driven system embodiment of FIG. 96;

[0118] FIG. 98 is a top view of a tool mounting portion embodiment of another surgical tool embodiment of the present invention;

[0119] FIG. 99 is a top cross-sectional view of another surgical tool embodiment of the present invention;

[0120] FIG. 100 is a cross-sectional view of a portion of a surgical end effector embodiment of a surgical tool embodiment of the present invention;

[0121] FIG. 101 is a cross-sectional end view of the surgical end effector of FIG. 100 taken along line 101-101 in FIG. 100;

[0122] FIG. 102 is a perspective view of the surgical end effector of FIGS. 100 and 101 with portions thereof shown in cross-section;

[0123] FIG. 103 is a side view of a portion of the surgical end effector of FIGS. 100-102;

[0124] FIG. 104 is a perspective view of a sled assembly embodiment of various surgical tool embodiments of the present invention;

[0125] FIG. 105 is a cross-sectional view of the sled assembly embodiment of FIG. 104 and a portion of the elongated channel of FIG. 103;

[0126] FIGS. 106-111 diagrammatically depict the sequential firing of staples in a surgical tool embodiment of the present invention;

[0127] FIG. 112 is a partial perspective view of a portion of a surgical end effector embodiment of the present invention;

[0128] FIG. 113 is a partial cross-sectional perspective view of a portion of a surgical end effector embodiment of a surgical tool embodiment of the present invention;

[0129] FIG. 114 is another partial cross-sectional perspective view of the surgical end effector embodiment of FIG. 113 with a sled assembly axially advancing therethrough;

[0130] FIG. 115 is a perspective view of another sled assembly embodiment of another surgical tool embodiment of the present invention;

[0131] FIG. 116 is a partial top view of a portion of the surgical end effector embodiment depicted in FIGS. 113 and 114 with the sled assembly axially advancing therethrough;

[0132] FIG. 117 is another partial top view of the surgical end effector embodiment of FIG. 116 with the top surface of the surgical staple cartridge omitted for clarity;

[0133] FIG. 118 is a partial cross-sectional side view of a rotary driver embodiment and staple pusher embodiment of the surgical end effector depicted in FIGS. 113 and 114;

[0134] FIG. 119 is a perspective view of an automated reloading system embodiment of the present invention with a surgical end effector in extractive engagement with the extraction system thereof;

[0135] FIG. 120 is another perspective view of the automated reloading system embodiment depicted in FIG. 119;

[0136] FIG. 121 is a cross-sectional elevational view of the automated reloading system embodiment depicted in FIGS. 119 and 120;

[0137] FIG. 122 is another cross-sectional elevational view of the automated reloading system embodiment depicted in FIGS. 119-121 with the extraction system thereof removing a spent surgical staple cartridge from the surgical end effector;

[0138] FIG. 123 is another cross-sectional elevational view of the automated reloading system embodiment depicted in FIGS. 119-122 illustrating the loading of a new surgical staple cartridge into a surgical end effector;

[0139] FIG. 124 is a perspective view of another automated reloading system embodiment of the present invention with some components shown in cross-section;

[0140] FIG. 125 is an exploded perspective view of a portion of the automated reloading system embodiment of FIG. 124;

[0141] FIG. 126 is another exploded perspective view of the portion of the automated reloading system embodiment depicted in FIG. 125;

[0142] FIG. 127 is a cross-sectional elevational view of the automated reloading system embodiment of FIGS. 124-126;

[0143] FIG. 128 is a cross-sectional view of an orientation tube embodiment supporting a disposable loading unit therein;

[0144] FIG. 129 is a perspective view of another surgical tool embodiment of the present invention;

[0145] FIG. 130 is a partial perspective view of an articulation joint embodiment of a surgical tool embodiment of the present invention;

[0146] FIG. 131 is a perspective view of a closure tube embodiment of a surgical tool embodiment of the present invention;

[0147] FIG. 132 is a perspective view of the closure tube embodiment of FIG. 131 assembled on the articulation joint embodiment of FIG. 130;

[0148] FIG. 133 is a top view of a portion of a tool mounting portion embodiment of a surgical tool embodiment of the present invention;

[0149] FIG. 134 is a perspective view of an articulation drive assembly embodiment employed in the tool mounting portion embodiment of FIG. 133;

[0150] FIG. 135 is a perspective view of another surgical tool embodiment of the present invention; and

[0151] FIG. 136 is a perspective view of another surgical tool embodiment of the present invention.

DETAILED DESCRIPTION

[0152] Applicant of the present application also owns the following patent applications which were filed on May 27, 2011 and which are each herein incorporated by reference in their respective entireties:

[0153] U.S. patent application Ser. No. 13/118,259, entitled SURGICAL INSTRUMENT WITH WIRELESS COMMUNICATION BETWEEN A CONTROL UNIT OF A ROBOTIC TOOL SYSTEM AND REMOTE SENSOR, now U.S. Pat. No. 8,684,253;

[0154] U.S. patent application Ser. No. 13/118,210, entitled ROBOTICALLY-CONTROLLED DISPOSABLE MOTOR DRIVEN LOADING UNIT, now U.S. Pat. No. 8,752,749;

[0155] U.S. patent application Ser. No. 13/118,194, entitled ROBOTICALLY-CONTROLLED ENDOSCOPIC ACCESSORY CHANNEL, now U.S. Pat. No. 8,992,422;

[0156] U.S. patent application Ser. No. 13/118,253, entitled ROBOTICALLY-CONTROLLED MOTORIZED SURGICAL INSTRUMENT, now U.S. Patent Application Publication No. 2011/0295269;

[0157] U.S. patent application Ser. No. 13/118,278, entitled ROBOTICALLY-CONTROLLED SURGICAL STAPLING DEVICES THAT PRODUCE FORMED STAPLES HAVING DIFFERENT LENGTHS, now U.S. Pat. No. 9,237,891;

[0158] U.S. patent application Ser. No. 13/118,190, entitled ROBOTICALLY-CONTROLLED MOTORIZED CUTTING AND FASTENING INSTRUMENT, now U.S. Pat. No. 9,179,912;

[0159] U.S. patent application Ser. No. 13/118,223, entitled ROBOTICALLY-CONTROLLED SHAFT BASED ROTARY DRIVE SYSTEMS FOR SURGICAL INSTRUMENTS, now U.S. Pat. No. 8,931,682;

[0160] U.S. patent application Ser. No. 13/118,263, entitled ROBOTICALLY-CONTROLLED SURGICAL INSTRUMENT HAVING RECORDING CAPABILITIES, now U.S. Patent Application Publication No. 2011/0295295;

[0161] U.S. patent application Ser. No. 13/118,272, entitled ROBOTICALLY-CONTROLLED SURGICAL INSTRUMENT WITH FORCE-FEEDBACK CAPABILITIES, now U.S. Patent Application Publication No. 2011/0290856; and

[0162] U.S. patent application Ser. No. 13/118,241, entitled SURGICAL STAPLING INSTRUMENTS WITH ROTATABLE STAPLE DEPLOYMENT ARRANGEMENTS, now U.S. Pat. No. 9,072,535.

[0163] Certain exemplary embodiments will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the devices and methods disclosed herein. One or more examples of these embodiments are illustrated in the accompanying drawings. Those of ordinary skill in the art will understand that the devices and methods specifically described herein and illustrated in the accompanying drawings are non-limiting exemplary embodiments and that the scope of the various embodiments of the present invention is defined solely by the claims. The features illustrated or described in connection with one exemplary embodiment may be combined with the features of other embodiments. Such modifications and variations are intended to be included within the scope of the present invention.

[0164] Uses of the phrases “in various embodiments,” “in some embodiments,” “in one embodiment,” or “in an embodiment,” or the like, throughout the specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics of one or more embodiments may be combined in any suitable manner in one or more other embodiments. Such modifications and variations are intended to be included within the scope of the present invention.

[0165] In FIGS. 1-3, a surgical stapling instrument 10 has at its distal end an end effector, depicted as a staple applying assembly 12, spaced apart from a handle 14 (FIG. 2) by an elongate shaft 16. The staple applying assembly 12 includes a staple channel 18 for receiving a replaceable staple cartridge 20. Pivotaly attached to the staple channel 18 is an anvil 22 that clamps tissue to the staple cartridge 20 and serves to deform staples 23 (FIG. 3) driven up from staple holes 24 in the staple cartridge 20 against staple forming recesses 26 (FIG. 6) in an anvil undersurface 28 into a closed shape. When the staple applying assembly 12 is closed, its cross sectional area, as well as the elongate shaft 16 are suitable for insertion through a small surgical opening, such as through a cannula of a trocar (not shown).

[0166] With particular reference to FIG. 1, correct placement and orientation of the staple applying assembly 12 is facilitated by controls on the handle 14. In particular, a rotation knob 30 causes rotation of the shaft 16 about its longitudinal axis, and hence rotation of the staple applying assembly 12. Additional positioning is enabled at an articulation joint 32 in the shaft 16 that pivots the staple applying assembly 12 in an arc from the longitudinal axis of the shaft 16, thereby allowing placement behind an organ or allowing other instruments such as an endoscope (not shown) to be oriented behind the staple applying assembly 12. This articulation is advantageously effected by an articulation control switch 34 on the handle 14 that transmits an electrical signal to the articulation

joint 32 to an Electroactive Polymer (EAP) actuator 36, powered by an EAP controller and power supply 38 contained within the handle 14.

[0167] Once positioned with tissue in the staple applying assembly 12, a surgeon closes the anvil 22 by drawing a closure trigger 40 proximally toward a pistol grip 42. Once clamped thus, the surgeon may grasp a more distally presented firing trigger 44, drawing it back to effect firing of the staple applying assembly 12, which in some applications is achieved in one single firing stroke and in other applications by multiple firing strokes. Firing accomplishes simultaneously stapling of at least two rows of staples while severing the tissue therebetween.

[0168] Retraction of the firing components may be automatically initiated upon full travel. Alternatively, a retraction lever 46 may be drawn aft to effect retraction. With the firing components retracted, the staple applying assembly 12 may be unclamped and opened by the surgeon slightly drawing the closure trigger 40 aft toward the pistol grip 42 and depressing a closure release button 48 and then releasing the closure trigger 40, thereby releasing the two stapled ends of severed tissue from the staple applying assembly 12.

[0169] Staple Applying Assembly.

[0170] While an articulation joint 32 is depicted in FIG. 1, for clarity and as an alternative application, the surgical stapling instrument 10 of FIGS. 2-14 omit an articulation joint 32. It should be appreciated, however, that aspects of the present invention have particular advantages for articulation as described below with regard to FIGS. 15-18.

[0171] In FIGS. 1-3, the staple applying assembly 12 accomplishes the functions of clamping onto tissue, driving staples and severing tissue by two distinct motions transferred longitudinally down the shaft 16 over a shaft frame 70. This shaft frame 70 is proximally attached to the handle 14 and coupled for rotation with the rotation knob 30. An illustrative multi-stroke handle 14 for the surgical stapling and severing instrument 10 of FIG. 1 is described in greater detail in the co-owned U.S. patent application entitled SURGICAL STAPLING INSTRUMENT INCORPORATING A MULTI-STROKE FIRING POSITION INDICATOR AND RETRACTION MECHANISM, U.S. patent application Ser. No. 10/674,026, now U.S. Pat. No. 7,364,061, the disclosure of which is hereby incorporated by reference in its entirety, with additional features and variation as described herein. While a multi-stroke handle 14 advantageously supports applications with high firing forces over a long distance, applications consistent with the present invention may incorporate a single firing stroke, such as described in commonly owned U.S. patent application Ser. No. 10/441,632, entitled SURGICAL STAPLING INSTRUMENT HAVING SEPARATE DISTINCT CLOSING AND FIRING SYSTEMS, now U.S. Pat. No. 7,000,818, the disclosure of which is hereby incorporated by reference in its entirety.

[0172] With particular reference to FIG. 3, the distal end of the shaft frame 70 is attached to the staple channel 18. The anvil 22 has a proximal pivoting end 72 that is pivotally received within a proximal end 74 of the staple channel 18, just distal to its engagement to the shaft frame 70. The pivoting end 72 of the anvil 22 includes a closure feature 76 proximate but distal to its pivotal attachment with the staple channel 18. Thus, a closure tube 78, whose distal end includes a horseshoe aperture 80 that engages this closure feature 76, selectively imparts an opening motion to the anvil 22 during proximal longitudinal motion and a closing motion to the

anvil 22 during distal longitudinal motion of the closure tube 78 sliding over the shaft frame 70 in response to the closure trigger 40.

[0173] The shaft frame 70 encompasses and guides a firing motion from the handle 14 through a longitudinally reciprocating, two-piece knife and firing bar 90. In particular, the shaft frame 70 includes a longitudinal firing bar slot 92 that receives a proximal portion of the two-piece knife and firing bar 90, specifically a laminate tapered firing bar 94. It should be appreciated that the laminated tapered firing bar 94 may be substituted with a solid firing bar or of other materials in applications not intended to pass through an articulation joint, such as depicted in FIGS. 2-14.

[0174] An E-beam 102 is the distal portion of the two-piece knife and firing bar 90, which facilitates separate closure and firing as well as spacing of the anvil 22 from the elongate staple channel 18 during firing. With particular reference to FIGS. 3-4, in addition to any attachment treatment such as brazing or an adhesive, the knife and firing bar 90 are formed of a female vertical attachment aperture 104 proximally formed in the E-beam 102 that receives a corresponding male attachment member 106 distally presented by the laminated tapered firing bar 94, allowing each portion to be formed of a selected material and process suitable for their disparate functions (e.g., strength, flexibility, friction). The E-beam 102 may be advantageously formed of a material having suitable material properties for forming a pair of top pins 110, a pair of middle pins 112 and a bottom pin or foot 114, as well as being able to acquire a sharp cutting edge 116. In addition, integrally formed and proximally projecting top guide 118 and middle guide 120 bracketing each vertical end of the cutting edge 116 further define a tissue staging area 122 assisting in guiding tissue to the sharp cutting edge 116 prior to being severed. The middle guide 120 also serves to engage and fire the staple applying apparatus 12 by abutting a stepped central member 124 of a wedge sled 126 (FIG. 5) that effects staple formation by the staple applying assembly 12, as described in greater detail below.

[0175] Forming these features (e.g., top pins 110, middle pins 112, and bottom foot 114) integrally with the E-beam 102 facilitates manufacturing at tighter tolerances relative to one another as compared to being assembled from a plurality of parts, ensuring desired operation during firing and/or effective interaction with various lockout features of the staple applying assembly 12.

[0176] In FIGS. 6-7, the surgical stapling instrument 10 is shown open, with the E-beam 102 fully retracted. During assembly, the lower foot 114 of the E-beam 102 is dropped through a widened hole 130 in the staple channel 18 and the E-beam 102 is then advanced such that the E-beam 102 slides distally along a lower track 132 formed in the staple channel 18. In particular, the lower track 132 includes a narrow slot 133 that opens up as a widened slot 134 on an undersurface of the staple channel 18 to form an inverted T-shape in lateral cross section, as depicted particularly in FIGS. 7 and 8, which communicates with the widened hole 130. Once assembled, the components proximally coupled to the laminate tapered firing bar 94 do not allow the lower foot 114 to proximally travel again to the widened hole 130 to permit disengagement.

[0177] In FIG. 9, the laminate tapered firing bar 94 facilitates insertion of the staple applying assembly 12 through a trocar. In particular, a more distal, downward projection 136 raises the E-beam 102 when fully retracted. This is accomplished by placement of the downward projection 136 at a

point where it cams upwardly on a proximal edge of the widened hole 130 in the staple channel 18.

[0178] In FIG. 10, the laminate tapered firing bar 94 also enhances operation of certain lockout features that may be incorporated into the staple channel 18 by including a more proximal upward projection 138 that is urged downwardly by the shaft frame 70 during an initial portion of the firing travel. In particular, a lateral bar 140 is defined between a pair of square apertures 142 in the shaft frame 70 (FIG. 3). A clip spring 144 that encompasses the lateral bar 140 downwardly urges a portion of the laminate tapered firing bar 94 projecting distally out of the longitudinal firing bar slot 92, which ensures certain advantageous lockout features are engaged when appropriate. This urging is more pronounced or confined solely to that portion of the firing travel when the upward projection 138 contacts the clip spring 144.

[0179] In FIGS. 6-7, the E-beam 102 is retracted with the top pins 110 thereof residing within an anvil pocket 150 near the pivoting proximal end of the anvil 22. A downwardly open vertical anvil slot 152 (FIG. 2) laterally widens in the anvil 22 into an anvil internal track 154 that captures the top pins 110 of the E-beam 102 as they distally advance during firing, as depicted in FIGS. 9-10, affirmatively spacing the anvil 22 from the staple channel 18. Thus, with the E-beam 102 retracted, the surgeon is able to repeatedly open and close the staple applying assembly 12 until satisfied with the placement and orientation of tissue captured therein for stapling and severing, yet the E-beam 102 assists in proper positioning of tissue even for a staple applying assembly 12 of reduced diameter and correspondingly reduced rigidity.

[0180] In FIGS. 2-3, 5-6, 8-14, the staple applying assembly 12 is shown with the replaceable staple cartridge 20 that includes the wedge sled 126. Longitudinally aligned and parallel plurality of downwardly open wedge slots 202 (FIG. 8) receive respective wedges 204 integral to the wedge sled 126. In FIGS. 8-10, the wedge sled 126 thus cams upwardly a plurality of staple drivers 206 that are vertically slidable within staple driver recesses 208. In this illustrative version, each staple driver 206 includes two vertical prongs, each translating upwardly into a respective staple hole 210 to upwardly force out and deform a staple 23 resting thereupon against a staple forming surface 214 (FIG. 10) of the anvil 22. A central firing recess 216 (FIG. 3) defined within the staple cartridge 20 proximate to the staple channel 18 allows the passage of the bottom, horizontal portion 218 (FIG. 5) of the wedge sled 126 as well as the middle pins 112 of the E-beam 102. Specifically, a staple cartridge tray 220 (FIGS. 3, 8) attaches to and underlies a polymer staple cartridge body 222 that has the staple driver recesses 208, staple holes 210, and central firing recess 216 formed therein. As staples 23 are thus formed to either side, the sharp cutting edge 116 enters a vertical through slot 230 passing through the longitudinal axis of the staple cartridge 20, excepting only a most distal end thereof.

[0181] Firing the staple applying assembly 12 begins as depicted in FIG. 10 with the two-piece knife and firing bar 90 proximally drawn until the downward projection 136 cams the middle guide 120 on the E-beam 102 upward and aft, allowing a new staple cartridge 20 to be inserted into the staple channel 18 when the anvil 22 is open as depicted in FIGS. 2, 6.

[0182] In FIG. 11, the two-piece knife and firing bar 90 has been distally advanced a small distance, allowing the downward projection 136 to drop into the widened hole 130 of the

lower track 132 under the urging of the clip spring 144 against the upward projection 138 of the laminate tapered firing bar 94. The middle guide 120 prevents further downward rotation by resting upon the stepped central member 124 of the wedge sled 126, thus maintaining the middle pin 112 of the E-beam within the central firing recess 216.

[0183] In FIG. 12, the two-piece knife and firing bar 90 has been distally fired, advancing the wedge sled 126 to cause formation of staples 23 while severing tissue 242 clamped between the anvil 22 and staple cartridge 20 with the sharp cutting edge 116. Thereafter, in FIG. 13, the two-piece knife and firing bar 90 is retracted, leaving the wedge sled 126 distally positioned.

[0184] In FIG. 14, the middle pin 112 is allowed to translate down into a lockout recess 240 formed in the staple channel 18 (also see FIGS. 7, 10). Thus, the operator would receive a tactile indication as the middle pin 112 encounters the distal edge of the lockout recess 240 when the wedge sled 126 (not shown in FIG. 14) is not proximally positioned (i.e., missing staple cartridge 20 or spent staple cartridge 20).

[0185] In FIG. 1, an articulation joint 32 is depicted that advantageously benefits from the flexible strength of the two-piece knife and firing bar 90. In FIGS. 15-18, the articulation joint 32 is depicted as a flex neck joint 300 formed by vertebral column body 302 having laterally symmetric pairs of arcing recesses 304 that allow articulation in an articulation plane. It is generally known to simultaneously compress and expand respective lateral sides 306, 308 by selective movement of control rods (not shown) that longitudinally pass through the respective lateral sides 306, 308. Depicted, however, are EAP plate actuators 310, 312, each capable of powered deflection to one or both lateral directions.

[0186] A central passage 320 (FIG. 16) defined longitudinally through the vertebral column body 302 receives a pair of support plates 322, 324 that prevent buckling and binding of the laminate tapered firing bar 94. In the illustrative version, each support plate 322, 324 has a proximal fixed end 326 (FIG. 15) and a sliding end 328 to accommodate changes in radial distance during articulation. Having a firing bar 94 of a thinner thickness is thus supported.

[0187] While the present invention has been illustrated by description of several embodiments and while the illustrative embodiments have been described in considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications may readily appear to those skilled in the art.

[0188] For example, while there are a number of advantages to having a wedge sled integral to a staple cartridge, in some applications consistent with aspects of the present invention, the wedge sled may be integral instead to an E-beam. For instance, an entire end effector may be replaceable rather than just the staple cartridge.

[0189] Over the years a variety of minimally invasive robotic (or "telesurgical") systems have been developed to increase surgical dexterity as well as to permit a surgeon to operate on a patient in an intuitive manner. Many of such systems are disclosed in the following U.S. patents which are each herein incorporated by reference in their respective entirety: U.S. Pat. No. 5,792,135, entitled ARTICULATED SURGICAL INSTRUMENT FOR PERFORMING MINIMALLY INVASIVE SURGERY WITH ENHANCED DEXTERITY AND SENSITIVITY, U.S. Pat. No. 6,231,565, entitled ROBOTIC ARM DLUS FOR PERFORMING SUR-

GICAL TASKS, U.S. Pat. No. 6,783,524, entitled ROBOTIC SURGICAL TOOL WITH ULTRASOUND CAUTERIZING AND CUTTING INSTRUMENT, U.S. Pat. No. 6,364,888, entitled ALIGNMENT OF MASTER AND SLAVE IN A MINIMALLY INVASIVE SURGICAL APPARATUS, U.S. Pat. No. 7,524,320, entitled MECHANICAL ACTUATOR INTERFACE SYSTEM FOR ROBOTIC SURGICAL TOOLS, U.S. Pat. No. 7,691,098, entitled PLATFORM LINK WRIST MECHANISM, U.S. Pat. No. 7,806,891, entitled REPOSITIONING AND REORIENTATION OF MASTER/SLAVE RELATIONSHIP IN MINIMALLY INVASIVE TELESURGERY, and U.S. Pat. No. 7,824,401, entitled SURGICAL TOOL WITH WRITED MONOPOLAR ELECTROSURGICAL END EFFECTORS. Many of such systems, however, have in the past been unable to generate the magnitude of forces required to effectively cut and fasten tissue.

[0190] FIG. 19 depicts one version of a master controller **1001** that may be used in connection with a robotic arm slave cart **1100** of the type depicted in FIG. 20. Master controller **1001** and robotic arm slave cart **1100**, as well as their respective components and control systems are collectively referred to herein as a robotic system **1000**. Examples of such systems and devices are disclosed in U.S. Pat. No. 7,524,320 which has been herein incorporated by reference. Thus, various details of such devices will not be described in detail herein beyond that which may be necessary to understand various embodiments and forms of the present invention. As is known, the master controller **1001** generally includes master controllers (generally represented as **1003** in FIG. 19) which are grasped by the surgeon and manipulated in space while the surgeon views the procedure via a stereo display **1002**. The master controllers **1001** generally comprise manual input devices which preferably move with multiple degrees of freedom, and which often further have an actuatable handle for actuating tools (for example, for closing grasping saws, applying an electrical potential to an electrode, or the like).

[0191] As can be seen in FIG. 20, in one form, the robotic arm cart **1100** is configured to actuate a plurality of surgical tools, generally designated as **1200**. Various robotic surgery systems and methods employing master controller and robotic arm cart arrangements are disclosed in U.S. Pat. No. 6,132,368, entitled MULTI-COMPONENT TELEPRESENCE SYSTEM AND METHOD, the full disclosure of which is incorporated herein by reference. In various forms, the robotic arm cart **1100** includes a base **1002** from which, in the illustrated embodiment, three surgical tools **1200** are supported. In various forms, the surgical tools **1200** are each supported by a series of manually articulatable linkages, generally referred to as set-up joints **1104**, and a robotic manipulator **1106**. These structures are herein illustrated with protective covers extending over much of the robotic linkage. These protective covers may be optional, and may be limited in size or entirely eliminated in some embodiments to minimize the inertia that is encountered by the servo mechanisms used to manipulate such devices, to limit the volume of moving components so as to avoid collisions, and to limit the overall weight of the cart **1100**. Cart **1100** will generally have dimensions suitable for transporting the cart **1100** between operating rooms. The cart **1100** may be configured to typically fit through standard operating room doors and onto standard hospital elevators. In various forms, the cart **1100** would preferably have a weight and include a wheel (or other

transportation) system that allows the cart **1100** to be positioned adjacent an operating table by a single attendant.

[0192] Referring now to FIG. 21, in at least one form, robotic manipulators **1106** may include a linkage **1108** that constrains movement of the surgical tool **1200**. In various embodiments, linkage **1108** includes rigid links coupled together by rotational joints in a parallelogram arrangement so that the surgical tool **1200** rotates around a point in space **1110**, as more fully described in issued U.S. Pat. No. 5,817,084, the full disclosure of which is incorporated herein by reference. The parallelogram arrangement constrains rotation to pivoting about an axis **1112a**, sometimes called the pitch axis. The links supporting the parallelogram linkage are pivotally mounted to set-up joints **1104** (FIG. 20) so that the surgical tool **1200** further rotates about an axis **1112b**, sometimes called the yaw axis. The pitch and yaw axes **1112a**, **1112b** intersect at the remote center **1114**, which is aligned along a shaft **1208** of the surgical tool **1200**. The surgical tool **1200** may have further degrees of driven freedom as supported by manipulator **1106**, including sliding motion of the surgical tool **1200** along the longitudinal tool axis "LT-LT". As the surgical tool **1200** slides along the tool axis LT-LT relative to manipulator **1106** (arrow **1112c**), remote center **1114** remains fixed relative to base **1116** of manipulator **1106**. Hence, the entire manipulator is generally moved to re-position remote center **1114**. Linkage **1108** of manipulator **1106** is driven by a series of motors **1120**. These motors actively move linkage **1108** in response to commands from a processor of a control system. As will be discussed in further detail below, motors **1120** are also employed to manipulate the surgical tool **1200**.

[0193] An alternative set-up joint structure is illustrated in FIG. 22. In this embodiment, a surgical tool **1200** is supported by an alternative manipulator structure **1106'** between two tissue manipulation tools. Those of ordinary skill in the art will appreciate that various embodiments of the present invention may incorporate a wide variety of alternative robotic structures, including those described in U.S. Pat. No. 5,878,193, entitled AUTOMATED ENDOSCOPE SYSTEM FOR OPTIMAL POSITIONING, the full disclosure of which is incorporated herein by reference. Additionally, while the data communication between a robotic component and the processor of the robotic surgical system is primarily described herein with reference to communication between the surgical tool **1200** and the master controller **1001**, it should be understood that similar communication may take place between circuitry of a manipulator, a set-up joint, an endoscope or other image capture device, or the like, and the processor of the robotic surgical system for component compatibility verification, component-type identification, component calibration (such as off-set or the like) communication, confirmation of coupling of the component to the robotic surgical system, or the like.

[0194] An exemplary non-limiting surgical tool **1200** that is well-adapted for use with a robotic system **1000** that has a tool drive assembly **1010** (FIG. 24) that is operatively coupled to a master controller **1001** that is operable by inputs from an operator (i.e., a surgeon) is depicted in FIG. 23. As can be seen in that Figure, the surgical tool **1200** includes a surgical end effector **2012** that comprises an endocutter. In at least one form, the surgical tool **1200** generally includes an elongated shaft assembly **2008** that has a proximal closure tube **2040** and a distal closure tube **2042** that are coupled together by an articulation joint **2011**. The surgical tool **1200** is operably

coupled to the manipulator by a tool mounting portion, generally designated as **1300**. The surgical tool **1200** further includes an interface **1230** which mechanically and electrically couples the tool mounting portion **1300** to the manipulator. One form of interface **1230** is illustrated in FIGS. 24-28. In various embodiments, the tool mounting portion **1300** includes a tool mounting plate **1302** that operably supports a plurality of (four are shown in FIG. 28) rotatable body portions, driven discs or elements **1304**, that each include a pair of pins **1306** that extend from a surface of the driven element **1304**. One pin **1306** is closer to an axis of rotation of each driven element **1304** than the other pin **1306** on the same driven element **1304**, which helps to ensure positive angular alignment of the driven element **1304**. Interface **1230** includes an adaptor portion **1240** that is configured to mountingly engage the mounting plate **1302** as will be further discussed below. The adaptor portion **1240** may include an array of electrical connecting pins **1242** (FIG. 26) which may be coupled to a memory structure by a circuit board within the tool mounting portion **1300**. While interface **1230** is described herein with reference to mechanical, electrical, and magnetic coupling elements, it should be understood that a wide variety of telemetry modalities might be used, including infrared, inductive coupling, or the like.

[0195] As can be seen in FIGS. 24-27, the adapter portion **1240** generally includes a tool side **1244** and a holder side **1246**. In various forms, a plurality of rotatable bodies **1250** are mounted to a floating plate **1248** which has a limited range of movement relative to the surrounding adaptor structure normal to the major surfaces of the adaptor **1240**. Axial movement of the floating plate **1248** helps decouple the rotatable bodies **1250** from the tool mounting portion **1300** when the levers **1303** along the sides of the tool mounting portion housing **1301** are actuated (See FIG. 23). Other mechanisms/arrangements may be employed for releasably coupling the tool mounting portion **1300** to the adaptor **1240**. In at least one form, rotatable bodies **1250** are resiliently mounted to floating plate **1248** by resilient radial members which extend into a circumferential indentation about the rotatable bodies **1250**. The rotatable bodies **1250** can move axially relative to plate **1248** by deflection of these resilient structures. When disposed in a first axial position (toward tool side **1244**) the rotatable bodies **1250** are free to rotate without angular limitation. However, as the rotatable bodies **1250** move axially toward tool side **1244**, tabs **1252** (extending radially from the rotatable bodies **1250**) laterally engage detents on the floating plates so as to limit angular rotation of the rotatable bodies **1250** about their axes. This limited rotation can be used to help drivingly engage the rotatable bodies **1250** with drive pins **1272** of a corresponding tool holder portion **1270** of the robotic system **1000**, as the drive pins **1272** will push the rotatable bodies **1250** into the limited rotation position until the pins **1234** are aligned with (and slide into) openings **1256'**. Openings **1256** on the tool side **1244** and openings **1256'** on the holder side **1246** of rotatable bodies **1250** are configured to accurately align the driven elements **1304** (FIG. 28) of the tool mounting portion **1300** with the drive elements **1271** of the tool holder **1270**. As described above regarding inner and outer pins **1306** of driven elements **1304**, the openings **1256**, **1256'** are at differing distances from the axis of rotation on their respective rotatable bodies **1250** so as to ensure that the alignment is not 180 degrees from its intended position. Additionally, each of the openings **1256** is slightly radially elongated so as to fittingly receive the pins **1306** in the circumfer-

ential orientation. This allows the pins **1306** to slide radially within the openings **1256**, **1256'** and accommodate some axial misalignment between the tool **1200** and tool holder **1270**, while minimizing any angular misalignment and backlash between the drive and driven elements. Openings **1256** on the tool side **1244** are offset by about 90 degrees from the openings **1256'** (shown in broken lines) on the holder side **1246**, as can be seen most clearly in FIG. 27.

[0196] Various embodiments may further include an array of electrical connector pins **1242** located on holder side **1246** of adaptor **1240**, and the tool side **1244** of the adaptor **1240** may include slots **1258** (FIG. 27) for receiving a pin array (not shown) from the tool mounting portion **1300**. In addition to transmitting electrical signals between the surgical tool **1200** and the tool holder **1270**, at least some of these electrical connections may be coupled to an adaptor memory device **1260** (FIG. 26) by a circuit board of the adaptor **1240**.

[0197] A detachable latch arrangement **1239** may be employed to releasably affix the adaptor **1240** to the tool holder **1270**. As used herein, the term “tool drive assembly” when used in the context of the robotic system **1000**, at least encompasses various embodiments of the adaptor **1240** and tool holder **1270** and which has been generally designated as **1010** in FIG. 24. For example, as can be seen in FIG. 24, the tool holder **1270** may include a first latch pin arrangement **1274** that is sized to be received in corresponding clevis slots **1241** provided in the adaptor **1240**. In addition, the tool holder **1270** may further have second latch pins **1276** that are sized to be retained in corresponding latch devices **1243** in the adaptor **1240**. See FIG. 26. In at least one form, a latch assembly **1245** is movably supported on the adaptor **1240** and is biasable between a first latched position wherein the latch pins **1276** are retained within their respective latch clevis **1243** and an unlatched position wherein the second latch pins **1276** may be into or removed from the latch devices **1243**. A spring or springs (not shown) are employed to bias the latch assembly into the latched position. A lip on the tool side **1244** of adaptor **1240** may slidably receive laterally extending tabs of tool mounting housing **1301**.

[0198] Turning next to FIGS. 28-35, in at least one embodiment, the surgical tool **1200** includes a surgical end effector **2012** that comprises in this example, among other things, at least one component **2024** that is selectively movable between first and second positions relative to at least one other component **2022** in response to various control motions applied thereto as will be discussed in further detail below. In various embodiments, component **2022** comprises an elongated channel **2022** configured to operably support a surgical staple cartridge **2034** therein and component **2024** comprises a pivotally translatable clamping member, such as an anvil **2024**. Various embodiments of the surgical end effector **2012** are configured to maintain the anvil **2024** and elongated channel **2022** at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector **2012**. As can be seen in FIG. 34, the surgical end effector **2012** further includes a cutting instrument **2032** and a sled **2033**. The cutting instrument **2032** may be, for example, a knife. The surgical staple cartridge **2034** operably houses a plurality of surgical staples (not shown) therein that are supported on movable staple drivers (not shown). As the cutting instrument **2032** is driven distally through a centrally-disposed slot (not shown) in the surgical staple cartridge **2034**, it forces the sled **2033** distally as well. As the sled **2033** is driven distally, its “wedge-shaped” configuration contacts the movable staple

drivers and drives them vertically toward the closed anvil **2024**. The surgical staples are formed as they are driven into the forming surface located on the underside of the anvil **2024**. The sled **2033** may be part of the surgical staple cartridge **2034**, such that when the cutting instrument **2032** is retracted following the cutting operation, the sled **2033** does not retract. The anvil **2024** may be pivotably opened and closed at a pivot point **2025** located at the proximal end of the elongated channel **2022**. The anvil **2024** may also include a tab **2027** at its proximal end that interacts with a component of the mechanical closure system (described further below) to facilitate the opening of the anvil **2024**. The elongated channel **2022** and the anvil **2024** may be made of an electrically conductive material (such as metal) so that they may serve as part of an antenna that communicates with sensor(s) in the end effector, as described above. The surgical staple cartridge **2034** could be made of a nonconductive material (such as plastic) and the sensor may be connected to or disposed in the surgical staple cartridge **2034**, as was also described above.

[0199] As can be seen in FIGS. 28-35, the surgical end effector **2012** is attached to the tool mounting portion **1300** by an elongated shaft assembly **2008** according to various embodiments. As shown in the illustrated embodiment, the shaft assembly **2008** includes an articulation joint generally indicated as **2011** that enables the surgical end effector **2012** to be selectively articulated about an articulation axis AA-AA that is substantially transverse to a longitudinal tool axis LT-LT. See FIG. 29. In other embodiments, the articulation joint is omitted. In various embodiments, the shaft assembly **2008** may include a closure tube assembly **2009** that comprises a proximal closure tube **2040** and a distal closure tube **2042** that are pivotably linked by a pivot links **2044** and operably supported on a spine assembly generally depicted as **2049**. In the illustrated embodiment, the spine assembly **2049** comprises a distal spine portion **2050** that is attached to the elongated channel **2022** and is pivotally coupled to the proximal spine portion **2052**. The closure tube assembly **2009** is configured to axially slide on the spine assembly **2049** in response to actuation motions applied thereto. The distal closure tube **2042** includes an opening **2045** into which the tab **2027** on the anvil **2024** is inserted in order to facilitate opening of the anvil **2024** as the distal closure tube **2042** is moved axially in the proximal direction "PD". The closure tubes **2040**, **2042** may be made of electrically conductive material (such as metal) so that they may serve as part of the antenna, as described above. Components of the main drive shaft assembly (e.g., the drive shafts **2048**, **2050**) may be made of a nonconductive material (such as plastic).

[0200] In use, it may be desirable to rotate the surgical end effector **2012** about the longitudinal tool axis LT-LT. In at least one embodiment, the tool mounting portion **1300** includes a rotational transmission assembly **2069** that is configured to receive a corresponding rotary output motion from the tool drive assembly **1010** of the robotic system **1000** and convert that rotary output motion to a rotary control motion for rotating the elongated shaft assembly **2008** (and surgical end effector **2012**) about the longitudinal tool axis LT-LT. In various embodiments, for example, the proximal end **2060** of the proximal closure tube **2040** is rotatably supported on the tool mounting plate **1302** of the tool mounting portion **1300** by a forward support cradle **1309** and a closure sled **2100** that is also movably supported on the tool mounting plate **1302**. In at least one form, the rotational transmission assembly **2069** includes a tube gear segment **2062** that is formed on (or

attached to) the proximal end **2060** of the proximal closure tube **2040** for operable engagement by a rotational gear assembly **2070** that is operably supported on the tool mounting plate **1302**. As can be seen in FIG. 31, the rotational gear assembly **2070**, in at least one embodiment, comprises a rotation drive gear **2072** that is coupled to a corresponding first one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **1302** when the tool mounting portion **1300** is coupled to the tool drive assembly **1010**. See FIG. 28. The rotational gear assembly **2070** further comprises a rotary driven gear **2074** that is rotatably supported on the tool mounting plate **1302** in meshing engagement with the tube gear segment **2062** and the rotation drive gear **2072**. Application of a first rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding driven element **1304** will thereby cause rotation of the rotation drive gear **2072**. Rotation of the rotation drive gear **2072** ultimately results in the rotation of the elongated shaft assembly **2008** (and the surgical end effector **2012**) about the longitudinal tool axis LT-LT (represented by arrow "R" in FIG. 31). It will be appreciated that the application of a rotary output motion from the tool drive assembly **1010** in one direction will result in the rotation of the elongated shaft assembly **2008** and surgical end effector **2012** about the longitudinal tool axis LT-LT in a first direction and an application of the rotary output motion in an opposite direction will result in the rotation of the elongated shaft assembly **2008** and surgical end effector **2012** in a second direction that is opposite to the first direction.

[0201] In at least one embodiment, the closure of the anvil **2024** relative to the staple cartridge **2034** is accomplished by axially moving the closure tube assembly **2009** in the distal direction "DD" on the spine assembly **2049**. As indicated above, in various embodiments, the proximal end **2060** of the proximal closure tube **2040** is supported by the closure sled **2100** which comprises a portion of a closure transmission, generally depicted as **2099**. In at least one form, the closure sled **2100** is configured to support the closure tube assembly **2009** on the tool mounting plate **1320** such that the proximal closure tube **2040** can rotate relative to the closure sled **2100**, yet travel axially with the closure sled **2100**. In particular, as can be seen in FIG. 36, the closure sled **2100** has an upstanding tab **2101** that extends into a radial groove **2063** in the proximal end portion of the proximal closure tube **2040**. In addition, as can be seen in 33 and 36, the closure sled **2100** has a tab portion **2102** that extends through a slot **1305** in the tool mounting plate **1302**. The tab portion **2102** is configured to retain the closure sled **2100** in sliding engagement with the tool mounting plate **1302**. In various embodiments, the closure sled **2100** has an upstanding portion **2104** that has a closure rack gear **2106** formed thereon. The closure rack gear **2106** is configured for driving engagement with a closure gear assembly **2110**. See FIG. 33.

[0202] In various forms, the closure gear assembly **2110** includes a closure spur gear **2112** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **1302**. See FIG. 28. Thus, application of a second rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **2112** when the tool mounting portion **1300** is coupled to the tool drive assembly **1010**. The closure gear assembly **2110** further includes a closure reduction gear set **2114** that is supported in meshing engagement

with the closure spur gear **2112**. As can be seen in FIGS. **32** and **33**, the closure reduction gear set **2114** includes a driven gear **2116** that is rotatably supported in meshing engagement with the closure spur gear **2112**. The closure reduction gear set **2114** further includes a first closure drive gear **2118** that is in meshing engagement with a second closure drive gear **2120** that is rotatably supported on the tool mounting plate **1302** in meshing engagement with the closure rack gear **2106**. Thus, application of a second rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **2112** and the closure transmission **2110** and ultimately drive the closure sled **2100** and closure tube assembly **2009** axially. The axial direction in which the closure tube assembly **2009** moves ultimately depends upon the direction in which the second driven element **1304** is rotated. For example, in response to one rotary output motion received from the tool drive assembly **1010** of the robotic system **1000**, the closure sled **2100** will be driven in the distal direction “DD” and ultimately drive the closure tube assembly **2009** in the distal direction. As the distal closure tube **2042** is driven distally, the end of the closure tube segment **2042** will engage a portion of the anvil **2024** and cause the anvil **2024** to pivot to a closed position. Upon application of an “opening” output motion from the tool drive assembly **1010** of the robotic system **1000**, the closure sled **2100** and closure tube assembly **2009** will be driven in the proximal direction “PD”. As the distal closure tube **2042** is driven in the proximal direction, the opening **2045** therein interacts with the tab **2027** on the anvil **2024** to facilitate the opening thereof. In various embodiments, a spring (not shown) may be employed to bias the anvil to the open position when the distal closure tube **2042** has been moved to its starting position. In various embodiments, the various gears of the closure gear assembly **2110** are sized to generate the necessary closure forces needed to satisfactorily close the anvil **2024** onto the tissue to be cut and stapled by the surgical end effector **2012**. For example, the gears of the closure transmission **2110** may be sized to generate approximately 70-120 pounds.

[0203] In various embodiments, the cutting instrument **2032** is driven through the surgical end effector **2012** by a knife bar **2200**. See FIGS. **34** and **36**. In at least one form, the knife bar **2200** is fabricated from, for example, stainless steel or other suitable materials and has a substantially rectangular cross-sectional shape. Such knife bar configuration is sufficiently rigid to push the cutting instrument **2032** through tissue clamped in the surgical end effector **2012**, while still being flexible enough to enable the surgical end effector **2012** to articulate relative to the proximal closure tube **2040** and the proximal spine portion **2052** about the articulation axis AA-AA as will be discussed in further detail below. As can be seen in FIGS. **37** and **38**, the proximal spine portion **2052** has a rectangular-shaped passage **2054** extending therethrough to provide support to the knife bar **2200** as it is axially pushed therethrough. The proximal spine portion **2052** has a proximal end **2056** that is rotatably mounted to a spine mounting bracket **2057** attached to the tool mounting plate **1032**. See FIG. **36**. Such arrangement permits the proximal spine portion **2052** to rotate, but not move axially, within the proximal closure tube **2040**.

[0204] As shown in FIG. **34**, the distal end **2202** of the knife bar **2200** is attached to the cutting instrument **2032**. The proximal end **2204** of the knife bar **2200** is rotatably affixed to a knife rack gear **2206** such that the knife bar **2200** is free to

rotate relative to the knife rack gear **2206**. See FIG. **36**. As can be seen in FIGS. **30-35**, the knife rack gear **2206** is slidably supported within a rack housing **2210** that is attached to the tool mounting plate **1302** such that the knife rack gear **2206** is retained in meshing engagement with a knife gear assembly **2220**. More specifically and with reference to FIG. **33**, in at least one embodiment, the knife gear assembly **2220** includes a knife spur gear **2222** that is coupled to a corresponding third one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **1302**. See FIG. **28**. Thus, application of another rotary output motion from the robotic system **1000** through the tool drive assembly **1010** to the corresponding third driven element **1304** will cause rotation of the knife spur gear **2222**. The knife gear assembly **2220** further includes a knife gear reduction set **2224** that includes a first knife driven gear **2226** and a second knife drive gear **2228**. The knife gear reduction set **2224** is rotatably mounted to the tool mounting plate **1302** such that the first knife driven gear **2226** is in meshing engagement with the knife spur gear **2222**. Likewise, the second knife drive gear **2228** is in meshing engagement with a third knife drive gear **2230** that is rotatably supported on the tool mounting plate **1302** in meshing engagement with the knife rack gear **2206**. In various embodiments, the gears of the knife gear assembly **2220** are sized to generate the forces needed to drive the cutting element **2032** through the tissue clamped in the surgical end effector **2012** and actuate the staples therein. For example, the gears of the knife drive assembly **2230** may be sized to generate approximately 40 to 100 pounds. It will be appreciated that the application of a rotary output motion from the tool drive assembly **1010** in one direction will result in the axial movement of the cutting instrument **2032** in a distal direction and application of the rotary output motion in an opposite direction will result in the axial travel of the cutting instrument **2032** in a proximal direction.

[0205] In various embodiments, the surgical tool **1200** employs an articulation system **2007** that includes an articulation joint **2011** that enables the surgical end effector **2012** to be articulated about an articulation axis AA-AA that is substantially transverse to the longitudinal tool axis LT-LT. In at least one embodiment, the surgical tool **1200** includes first and second articulation bars **2250a**, **2250b** that are slidably supported within corresponding passages **2053** provided through the proximal spine portion **2052**. See FIGS. **36** and **38**. In at least one form, the first and second articulation bars **2250a**, **2250b** are actuated by an articulation transmission generally designated as **2249** that is operably supported on the tool mounting plate **1032**. Each of the articulation bars **2250a**, **2250b** has a proximal end **2252** that has a guide rod protruding therefrom which extend laterally through a corresponding slot in the proximal end portion of the proximal spine portion **2052** and into a corresponding arcuate slot in an articulation nut **2260** which comprises a portion of the articulation transmission. FIG. **37** illustrates articulation bar **2250a**. It will be understood that articulation bar **2250b** is similarly constructed. As can be seen in FIG. **37**, for example, the articulation bar **2250a** has a guide rod **2254** which extends laterally through a corresponding slot **2058** in the proximal end portion **2056** of the distal spine portion **2050** and into a corresponding arcuate slot **2262** in the articulation nut **2260**. In addition, the articulation bar **2250a** has a distal end **2251a** that is pivotally coupled to the distal spine portion **2050** by, for example, a pin **2253a** and articulation bar **2250b** has a distal end **2251b** that is pivotally coupled to the distal spine

portion **2050** by, for example, a pin **2253b**. In particular, the articulation bar **2250a** is laterally offset in a first lateral direction from the longitudinal tool axis LT-LT and the articulation bar **2250b** is laterally offset in a second lateral direction from the longitudinal tool axis LT-LT. Thus, axial movement of the articulation bars **2250a** and **2250b** in opposing directions will result in the articulation of the distal spine portion **2050** as well as the surgical end effector **2012** attached thereto about the articulation axis AA-AA as will be discussed in further detail below.

[0206] Articulation of the surgical end effector **2012** is controlled by rotating the articulation nut **2260** about the longitudinal tool axis LT-LT. The articulation nut **2260** is rotatably journaled on the proximal end portion **2056** of the distal spine portion **2050** and is rotatably driven thereon by an articulation gear assembly **2270**. More specifically and with reference to FIG. 31, in at least one embodiment, the articulation gear assembly **2270** includes an articulation spur gear **2272** that is coupled to a corresponding fourth one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **1302**. See FIG. 28. Thus, application of another rotary input motion from the robotic system **1000** through the tool drive assembly **1010** to the corresponding fourth driven element **1304** will cause rotation of the articulation spur gear **2272** when the interface **1230** is coupled to the tool holder **1270**. An articulation drive gear **2274** is rotatably supported on the tool mounting plate **1302** in meshing engagement with the articulation spur gear **2272** and a gear portion **2264** of the articulation nut **2260** as shown. As can be seen in FIGS. 36 and 37, the articulation nut **2260** has a shoulder **2266** formed thereon that defines an annular groove **2267** for receiving retaining posts **2268** therein. Retaining posts **2268** are attached to the tool mounting plate **1302** and serve to prevent the articulation nut **2260** from moving axially on the proximal spine portion **2052** while maintaining the ability to be rotated relative thereto. Thus, rotation of the articulation nut **2260** in a first direction, will result in the axial movement of the articulation bar **2250a** in a distal direction “DD” and the axial movement of the articulation bar **2250b** in a proximal direction “PD” because of the interaction of the guide rods **2254** with the spiral slots **2262** in the articulation gear **2260**. Similarly, rotation of the articulation nut **2260** in a second direction that is opposite to the first direction will result in the axial movement of the articulation bar **2250a** in the proximal direction “PD” as well as cause articulation bar **2250b** to axially move in the distal direction “DD”. Thus, the surgical end effector **2012** may be selectively articulated about articulation axis “AA-AA” in a first direction “FD” by simultaneously moving the articulation bar **2250a** in the distal direction “DD” and the articulation bar **2250b** in the proximal direction “PD”. Likewise, the surgical end effector **2012** may be selectively articulated about the articulation axis “AA-AA” in a second direction “SD” by simultaneously moving the articulation bar **2250a** in the proximal direction “PD” and the articulation bar **2250b** in the distal direction “DD.” See FIG. 29.

[0207] The tool embodiment described above employs an interface arrangement that is particularly well-suited for mounting the robotically controllable medical tool onto at least one form of robotic arm arrangement that generates at least four different rotary control motions. Those of ordinary skill in the art will appreciate that such rotary output motions may be selectively controlled through the programmable control systems employed by the robotic system/controller. For

example, the tool arrangement described above may be well-suited for use with those robotic systems manufactured by Intuitive Surgical, Inc. of Sunnyvale, Calif., U.S.A., many of which may be described in detail in various patents incorporated herein by reference. The unique and novel aspects of various embodiments of the present invention serve to utilize the rotary output motions supplied by the robotic system to generate specific control motions having sufficient magnitudes that enable end effectors to cut and staple tissue. Thus, the unique arrangements and principles of various embodiments of the present invention may enable a variety of different forms of the tool systems disclosed and claimed herein to be effectively employed in connection with other types and forms of robotic systems that supply programmed rotary or other output motions. In addition, as will become further apparent as the present Detailed Description proceeds, various end effector embodiments of the present invention that require other forms of actuation motions may also be effectively actuated utilizing one or more of the control motions generated by the robotic system.

[0208] FIGS. 40-44 illustrate yet another surgical tool **2300** that may be effectively employed in connection with the robotic system **1000** that has a tool drive assembly that is operably coupled to a controller of the robotic system that is operable by inputs from an operator and which is configured to provide at least one rotary output motion to at least one rotatable body portion supported on the tool drive assembly. In various forms, the surgical tool **2300** includes a surgical end effector **2312** that includes an elongated channel **2322** and a pivotally translatable clamping member, such as an anvil **2324**, which are maintained at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector **2312**. As shown in the illustrated embodiment, the surgical end effector **2312** may include, in addition to the previously-mentioned elongated channel **2322** and anvil **2324**, a cutting instrument **2332** that has a sled portion **2333** formed thereon, a surgical staple cartridge **2334** that is seated in the elongated channel **2322**, and a rotary end effector drive shaft **2336** that has a helical screw thread formed thereon. The cutting instrument **2332** may be, for example, a knife. As will be discussed in further detail below, rotation of the end effector drive shaft **2336** will cause the cutting instrument **2332** and sled portion **2333** to axially travel through the surgical staple cartridge **2334** to move between a starting position and an ending position. The direction of axial travel of the cutting instrument **2332** depends upon the direction in which the end effector drive shaft **2336** is rotated. The anvil **2324** may be pivotally opened and closed at a pivot point **2325** connected to the proximate end of the elongated channel **2322**. The anvil **2324** may also include a tab **2327** at its proximate end that operably interfaces with a component of the mechanical closure system (described further below) to open and close the anvil **2324**. When the end effector drive shaft **2336** is rotated, the cutting instrument **2332** and sled **2333** will travel longitudinally through the surgical staple cartridge **2334** from the starting position to the ending position, thereby cutting tissue clamped within the surgical end effector **2312**. The movement of the sled **2333** through the surgical staple cartridge **2334** causes the staples therein to be driven through the severed tissue and against the closed anvil **2324**, which turns the staples to fasten the severed tissue. In one form, the elongated channel **2322** and the anvil **2324** may be made of an electrically conductive material (such as metal) so that they may serve as part of the antenna that communi-

cates with sensor(s) in the end effector, as described above. The surgical staple cartridge **2334** could be made of a non-conductive material (such as plastic) and the sensor may be connected to or disposed in the surgical staple cartridge **2334**, as described above.

[0209] It should be noted that although the embodiments of the surgical tool **2300** described herein employ a surgical end effector **2312** that staples the severed tissue, in other embodiments different techniques for fastening or sealing the severed tissue may be used. For example, end effectors that use RF energy or adhesives to fasten the severed tissue may also be used. U.S. Pat. No. 5,709,680, entitled ELECTROSURGICAL HEMOSTATIC DEVICE, and U.S. Pat. No. 5,688,270, entitled ELECTROSURGICAL HEMOSTATIC DEVICE WITH RECESSED AND/OR OFFSET ELECTRODES, which are incorporated herein by reference, discloses cutting instruments that use RF energy to fasten the severed tissue. U.S. patent application Ser. No. 11/267,811, now U.S. Pat. No. 7,673,783, and U.S. patent application Ser. No. 11/267,383, now U.S. Pat. No. 7,607,557, which are also incorporated herein by reference, disclose cutting instruments that use adhesives to fasten the severed tissue. Accordingly, although the description herein refers to cutting/stapling operations and the like, it should be recognized that this is an exemplary embodiment and is not meant to be limiting. Other tissue-fastening techniques may also be used.

[0210] In the illustrated embodiment, the surgical end effector **2312** is coupled to an elongated shaft assembly **2308** that is coupled to a tool mounting portion **2460** and defines a longitudinal tool axis LT-LT. In this embodiment, the elongated shaft assembly **2308** does not include an articulation joint. Those of ordinary skill in the art will understand that other embodiments may have an articulation joint therein. In at least one embodiment, the elongated shaft assembly **2308** comprises a hollow outer tube **2340** that is rotatably supported on a tool mounting plate **2462** of a tool mounting portion **2460** as will be discussed in further detail below. In various embodiments, the elongated shaft assembly **2308** further includes a distal spine shaft **2350**. Distal spine shaft **2350** has a distal end portion **2354** that is coupled to, or otherwise integrally formed with, a distal stationary base portion **2360** that is non-movably coupled to the channel **2322**. See FIGS. 41-43.

[0211] As shown in FIG. 41, the distal spine shaft **2350** has a proximal end portion **2351** that is slidably received within a slot **2355** in a proximal spine shaft **2353** that is non-movably supported within the hollow outer tube **2340** by at least one support collar **2357**. As can be further seen in FIGS. 41 and 42, the surgical tool **2300** includes a closure tube **2370** that is constrained to only move axially relative to the distal stationary base portion **2360**. The closure tube **2370** has a proximal end **2372** that has an internal thread **2374** formed therein that is in threaded engagement with a transmission arrangement, generally depicted as **2375** that is operably supported on the tool mounting plate **2462**. In various forms, the transmission arrangement **2375** includes a rotary drive shaft assembly, generally designated as **2381**. When rotated, the rotary drive shaft assembly **2381** will cause the closure tube **2370** to move axially as will be describe in further detail below. In at least one form, the rotary drive shaft assembly **2381** includes a closure drive nut **2382** of a closure clutch assembly generally designated as **2380**. More specifically, the closure drive nut **2382** has a proximal end portion **2384** that is rotatably supported relative to the outer tube **2340** and is in threaded

engagement with the closure tube **2370**. For assembly purposes, the proximal end portion **2384** may be threadably attached to a retention ring **2386**. Retention ring **2386**, in cooperation with an end **2387** of the closure drive nut **2382**, defines an annular slot **2388** into which a shoulder **2392** of a locking collar **2390** extends. The locking collar **2390** is non-movably attached (e.g., welded, glued, etc.) to the end of the outer tube **2340**. Such arrangement serves to affix the closure drive nut **2382** to the outer tube **2340** while enabling the closure drive nut **2382** to rotate relative to the outer tube **2340**. The closure drive nut **2382** further has a distal end **2383** that has a threaded portion **2385** that threadably engages the internal thread **2374** of the closure tube **2370**. Thus, rotation of the closure drive nut **2382** will cause the closure tube **2370** to move axially as represented by arrow "D" in FIG. 42.

[0212] Closure of the anvil **2324** and actuation of the cutting instrument **2332** are accomplished by control motions that are transmitted by a hollow drive sleeve **2400**. As can be seen in FIGS. 41 and 42, the hollow drive sleeve **2400** is rotatably and slidably received on the distal spine shaft **2350**. The drive sleeve **2400** has a proximal end portion **2401** that is rotatably mounted to the proximal spine shaft **2353** that protrudes from the tool mounting portion **2460** such that the drive sleeve **2400** may rotate relative thereto. See FIG. 41. As can also be seen in FIGS. 41-43, the drive sleeve **2400** is rotated about the longitudinal tool axis "LT-LT" by a drive shaft **2440**. The drive shaft **2440** has a drive gear **2444** that is attached to its distal end **2442** and is in meshing engagement with a driven gear **2450** that is attached to the drive sleeve **2400**.

[0213] The drive sleeve **2400** further has a distal end portion **2402** that is coupled to a closure clutch **2410** portion of the closure clutch assembly **2380** that has a proximal face **2412** and a distal face **2414**. The proximal face **2412** has a series of proximal teeth **2416** formed thereon that are adapted for selective engagement with corresponding proximal teeth cavities **2418** formed in the proximal end portion **2384** of the closure drive nut **2382**. Thus, when the proximal teeth **2416** are in meshing engagement with the proximal teeth cavities **2418** in the closure drive nut **2382**, rotation of the drive sleeve **2400** will result in rotation of the closure drive nut **2382** and ultimately cause the closure tube **2370** to move axially as will be discussed in further detail below.

[0214] As can be most particularly seen in FIGS. 41 and 42 the distal face **2414** of the drive clutch portion **2410** has a series of distal teeth **2415** formed thereon that are adapted for selective engagement with corresponding distal teeth cavities **2426** formed in a face plate portion **2424** of a knife drive shaft assembly **2420**. In various embodiments, the knife drive shaft assembly **2420** comprises a hollow knife shaft segment **2430** that is rotatably received on a corresponding portion of the distal spine shaft **2350** that is attached to or protrudes from the stationary base **2360**. When the distal teeth **2415** of the closure clutch portion **2410** are in meshing engagement with the distal teeth cavities **2426** in the face plate portion **2424**, rotation of the drive sleeve **2400** will result in rotation of the drive shaft segment **2430** about the stationary shaft **2350**. As can be seen in FIGS. 41-43, a knife drive gear **2432** is attached to the drive shaft segment **2430** and is meshing engagement with a drive knife gear **2434** that is attached to the end effector drive shaft **2336**. Thus, rotation of the drive shaft segment **2430** will result in the rotation of the end effector drive shaft **2336** to drive the cutting instrument **2332** and sled **2333** distally through the surgical staple cartridge **2334** to cut and staple tissue clamped within the surgical end effector **2312**. The sled

2333 may be made of, for example, plastic, and may have a sloped distal surface. As the sled **2333** traverses the elongated channel **2322**, the sloped forward surface of the sled **2333** pushes up or “drive” the staples in the surgical staple cartridge **2334** through the clamped tissue and against the anvil **2324**. The anvil **2324** turns or “forms” the staples, thereby stapling the severed tissue. As used herein, the term “fire” refers to the initiation of actions required to drive the cutting instrument and sled portion in a distal direction through the surgical staple cartridge to cut the tissue clamped in the surgical end effector and drive the staples through the severed tissue.

[0215] In use, it may be desirable to rotate the surgical end effector **2312** about the longitudinal tool axis LT-LT. In at least one embodiment, the transmission arrangement **2375** includes a rotational transmission assembly **2465** that is configured to receive a corresponding rotary output motion from the tool drive assembly **1010** of the robotic system **1000** and convert that rotary output motion to a rotary control motion for rotating the elongated shaft assembly **2308** (and surgical end effector **2312**) about the longitudinal tool axis LT-LT. As can be seen in FIG. 44, a proximal end **2341** of the outer tube **2340** is rotatably supported within a cradle arrangement **2343** attached to the tool mounting plate **2462** of the tool mounting portion **2460**. A rotation gear **2345** is formed on or attached to the proximal end **2341** of the outer tube **2340** of the elongated shaft assembly **2308** for meshing engagement with a rotation gear assembly **2470** operably supported on the tool mounting plate **2462**. In at least one embodiment, a rotation drive gear **2472** is coupled to a corresponding first one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **2462** when the tool mounting portion **2460** is coupled to the tool drive assembly **1010**. See FIGS. 28 and 44. The rotation drive assembly **2470** further comprises a rotary driven gear **2474** that is rotatably supported on the tool mounting plate **2462** in meshing engagement with the rotation gear **2345** and the rotation drive gear **2472**. Application of a first rotary output motion from the robotic system **1000** through the tool drive assembly **1010** to the corresponding driven element **1304** will thereby cause rotation of the rotation drive gear **2472** by virtue of being operably coupled thereto. Rotation of the rotation drive gear **2472** ultimately results in the rotation of the elongated shaft assembly **2308** (and the end effector **2312**) about the longitudinal tool axis LT-LT (primary rotary motion).

[0216] Closure of the anvil **2324** relative to the staple cartridge **2034** is accomplished by axially moving the closure tube **2370** in the distal direction “DD”. Axial movement of the closure tube **2370** in the distal direction “DD” is accomplished by applying a rotary control motion to the closure drive nut **2382**. To apply the rotary control motion to the closure drive nut **2382**, the closure clutch **2410** must first be brought into meshing engagement with the proximal end portion **2384** of the closure drive nut **2382**. In various embodiments, the transmission arrangement **2375** further includes a shifter drive assembly **2480** that is operably supported on the tool mounting plate **2462**. More specifically and with reference to FIG. 44, it can be seen that a proximal end portion **2359** of the proximal spine portion **2353** extends through the rotation gear **2345** and is rotatably coupled to a shifter gear rack **2481** that is slidably affixed to the tool mounting plate **2462** through slots **2482**. The shifter drive assembly **2480** further comprises a shifter drive gear **2483** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **2462** when

the tool mounting portion **2460** is coupled to the tool holder **1270**. See FIGS. 28 and 44. The shifter drive assembly **2480** further comprises a shifter driven gear **2478** that is rotatably supported on the tool mounting plate **2462** in meshing engagement with the shifter drive gear **2483** and the shifter rack gear **2482**. Application of a second rotary output motion from the robotic system **1000** through the tool drive assembly **1010** to the corresponding driven element **1304** will thereby cause rotation of the shifter drive gear **2483** by virtue of being operably coupled thereto. Rotation of the shifter drive gear **2483** ultimately results in the axial movement of the shifter gear rack **2482** and the proximal spine portion **2353** as well as the drive sleeve **2400** and the closure clutch **2410** attached thereto. The direction of axial travel of the closure clutch **2410** depends upon the direction in which the shifter drive gear **2483** is rotated by the robotic system **1000**. Thus, rotation of the shifter drive gear **2483** in a first rotary direction will result in the axial movement of the closure clutch **2410** in the proximal direction “PD” to bring the proximal teeth **2416** into meshing engagement with the proximal teeth cavities **2418** in the closure drive nut **2382**. Conversely, rotation of the shifter drive gear **2483** in a second rotary direction (opposite to the first rotary direction) will result in the axial movement of the closure clutch **2410** in the distal direction “DD” to bring the distal teeth **2415** into meshing engagement with corresponding distal teeth cavities **2426** formed in the face plate portion **2424** of the knife drive shaft assembly **2420**.

[0217] Once the closure clutch **2410** has been brought into meshing engagement with the closure drive nut **2382**, the closure drive nut **2382** is rotated by rotating the closure clutch **2410**. Rotation of the closure clutch **2410** is controlled by applying rotary output motions to a rotary drive transmission portion **2490** of transmission arrangement **2375** that is operably supported on the tool mounting plate **2462** as shown in FIG. 44. In at least one embodiment, the rotary drive transmission **2490** includes a rotary drive assembly **2490'** that includes a gear **2491** that is coupled to a corresponding third one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **2462** when the tool mounting portion **2460** is coupled to the tool holder **1270**. See FIGS. 28 and 44. The rotary drive transmission **2490** further comprises a first rotary driven gear **2492** that is rotatably supported on the tool mounting plate **2462** in meshing engagement with a second rotary driven gear **2493** and the rotary drive gear **2491**. The second rotary driven gear **2493** is coupled to a proximal end portion **2443** of the drive shaft **2440**.

[0218] Rotation of the rotary drive gear **2491** in a first rotary direction will result in the rotation of the drive shaft **2440** in a first direction. Conversely, rotation of the rotary drive gear **2491** in a second rotary direction (opposite to the first rotary direction) will cause the drive shaft **2440** to rotate in a second direction. As indicated above, the drive shaft **2440** has a drive gear **2444** that is attached to its distal end **2442** and is in meshing engagement with a driven gear **2450** that is attached to the drive sleeve **2400**. Thus, rotation of the drive shaft **2440** results in rotation of the drive sleeve **2400**.

[0219] A method of operating the surgical tool **2300** will now be described. Once the tool mounting portion **2462** has been operably coupled to the tool holder **1270** of the robotic system **1000** and oriented into position adjacent the target tissue to be cut and stapled, if the anvil **2334** is not already in the open position (FIG. 41), the robotic system **1000** may apply the first rotary output motion to the shifter drive gear **2483** which results in the axial movement of the closure

clutch **2410** into meshing engagement with the closure drive nut **2382** (if it is not already in meshing engagement therewith). See FIG. 42. Once the controller **1001** of the robotic system **1000** has confirmed that the closure clutch **2410** is meshing engagement with the closure drive nut **2382** (e.g., by means of sensor(s)—not shown) in the surgical end effector **2312** that are in communication with the robotic control system), the robotic controller **1001** may then apply a second rotary output motion to the rotary drive gear **2492** which, as was described above, ultimately results in the rotation of the rotary drive nut **2382** in the first direction which results in the axial travel of the closure tube **2370** in the distal direction “DD”. As the closure tube **2370** moved in the distal direction, it contacts a portion of the anvil **2323** and causes the anvil **2324** to pivot to the closed position to clamp the target tissue between the anvil **2324** and the surgical staple cartridge **2334**. Once the robotic controller **1001** determines that the anvil **2334** has been pivoted to the closed position by corresponding sensor(s) in the surgical end effector **2312** in communication therewith (not shown), the robotic system **1000** discontinues the application of the second rotary output motion to the rotary drive gear **2491**. The robotic controller **1001** may also provide the surgeon with an indication that the anvil **2334** has been fully closed. The surgeon may then initiate the firing procedure. In alternative embodiments, the firing procedure may be automatically initiated by the robotic controller **1001**. The robotic controller **1001** then applies the primary rotary control motion **2483** to the shifter drive gear **2483** which results in the axial movement of the closure clutch **2410** into meshing engagement with the face plate portion **2424** of the knife drive shaft assembly **2420**. See FIG. 43. Once the controller **1001** of the robotic system **1000** has confirmed that the closure clutch **2410** is meshing engagement with the face plate portion **2424** (by means of sensor(s) in the end effector **2312** that are in communication with the robotic controller **1001**), the robotic controller **1001** may then apply the second rotary output motion to the rotary drive gear **2492** which, as was described above, ultimately results in the axial movement of the cutting instrument **2332** and sled portion **2333** in the distal direction “DD” through the surgical staple cartridge **2334**. As the cutting instrument **2332** moves distally through the surgical staple cartridge **2334**, the tissue clamped therein is severed. As the sled portion **2333** is driven distally, it causes the staples within the surgical staple cartridge to be driven through the severed tissue into forming contact with the anvil **2324**. Once the robotic controller **1001** has determined that the cutting instrument **2324** has reached the end position within the surgical staple cartridge **2334** (by means of sensor(s)—not shown) in the end effector **2312** that are in communication with the robotic controller **1001**), the robotic controller **1001** discontinues the application of the second rotary output motion to the rotary drive gear **2491**. Thereafter, the robotic controller **1001** applies the secondary rotary output motion to the rotary drive gear **2491** which ultimately results in the axial travel of the cutting instrument **2332** and sled portion **2333** in the proximal direction “PD” to the starting position. Once the robotic controller **1001** has determined that the cutting instrument **2324** has reached the starting position by means of sensor(s) in the surgical end effector **2312** that are in communication with the robotic controller **1001**, the robotic controller **1001** discontinues the application of the secondary rotary output motion to the rotary drive gear **2491**. Thereafter, the robotic controller **1001** applies the primary rotary output motion to the shifter drive gear **2483** to cause the

closure clutch **2410** to move into engagement with the rotary drive nut **2382**. Once the closure clutch **2410** has been moved into meshing engagement with the rotary drive nut **2382**, the robotic controller **1001** then applies the secondary output motion to the rotary drive gear **2491** which ultimately results in the rotation of the rotary drive nut **2382** in the second direction to cause the closure tube **2370** to move in the proximal direction “PD”. As can be seen in FIGS. 41-43, the closure tube **2370** has an opening **2345** therein that engages the tab **2327** on the anvil **2324** to cause the anvil **2324** to pivot to the open position. In alternative embodiments, a spring may also be employed to pivot the anvil **2324** to the open position when the closure tube **2370** has been returned to the starting position (FIG. 41).

[0220] FIGS. 45-49 illustrate yet another surgical tool **2500** that may be effectively employed in connection with the robotic system **1000**. In various forms, the surgical tool **2500** includes a surgical end effector **2512** that includes a “first portion” in the form of an elongated channel **2522** and a “second movable portion” in the form of a pivotally translatable clamping member, such as an anvil **2524**, which are maintained at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector **2512**. As shown in the illustrated embodiment, the surgical end effector **2512** may include, in addition to the previously-mentioned elongated channel **2522** and anvil **2524**, a “third movable portion” in the form of a cutting instrument **2532**, a sled (not shown), and a surgical staple cartridge **2534** that is removably seated in the elongated channel **2522**. The cutting instrument **2532** may be, for example, a knife. The anvil **2524** may be pivotably opened and closed at a pivot point **2525** connected to the proximate end of the elongated channel **2522**. The anvil **2524** may also include a tab **2527** at its proximate end that is configured to operably interface with a component of the mechanical closure system (described further below) to open and close the anvil **2524**. When actuated, the knife **2532** and sled travel longitudinally along the elongated channel **2522**, thereby cutting tissue clamped within the surgical end effector **2512**. The movement of the sled along the elongated channel **2522** causes the staples of the surgical staple cartridge **2534** to be driven through the severed tissue and against the closed anvil **2524**, which turns the staples to fasten the severed tissue. In one form, the elongated channel **2522** and the anvil **2524** may be made of an electrically conductive material (such as metal) so that they may serve as part of the antenna that communicates with sensor(s) in the surgical end effector, as described above. The surgical staple cartridge **2534** could be made of a nonconductive material (such as plastic) and the sensor may be connected to or disposed in the surgical staple cartridge **2534**, as described above.

[0221] It should be noted that although the embodiments of the surgical tool **2500** described herein employ a surgical end effector **2512** that staples the severed tissue, in other embodiments different techniques for fastening or sealing the severed tissue may be used. For example, end effectors that use RF energy or adhesives to fasten the severed tissue may also be used. U.S. Pat. No. 5,709,680, entitled ELECTROSURGICAL HEMOSTATIC DEVICE, and U.S. Pat. No. 5,688,270, entitled ELECTROSURGICAL HEMOSTATIC DEVICE WITH RECESSED AND/OR OFFSET ELECTRODES, which are incorporated herein by reference, discloses cutting instruments that use RF energy to fasten the severed tissue. U.S. patent application Ser. No. 11/267,811,

now U.S. Pat. No. 7,673,783 and U.S. patent application Ser. No. 11/267,383, now U.S. Pat. No. 7,607,557, which are also incorporated herein by reference, disclose cutting instruments that use adhesives to fasten the severed tissue. Accordingly, although the description herein refers to cutting/stapling operations and the like, it should be recognized that this is an exemplary embodiment and is not meant to be limiting. Other tissue-fastening techniques may also be used.

[0222] In the illustrated embodiment, the elongated channel 2522 of the surgical end effector 2512 is coupled to an elongated shaft assembly 2508 that is coupled to a tool mounting portion 2600. In at least one embodiment, the elongated shaft assembly 2508 comprises a hollow spine tube 2540 that is non-movably coupled to a tool mounting plate 2602 of the tool mounting portion 2600. As can be seen in FIGS. 46 and 47, the proximal end 2523 of the elongated channel 2522 comprises a hollow tubular structure configured to be attached to the distal end 2541 of the spine tube 2540. In one embodiment, for example, the proximal end 2523 of the elongated channel 2522 is welded or glued to the distal end of the spine tube 2540.

[0223] As can be further seen in FIGS. 46 and 47, in at least one non-limiting embodiment, the surgical tool 2500 further includes an axially movable actuation member in the form of a closure tube 2550 that is constrained to move axially relative to the elongated channel 2522 and the spine tube 2540. The closure tube 2550 has a proximal end 2552 that has an internal thread 2554 formed therein that is in threaded engagement with a rotatably movable portion in the form of a closure drive nut 2560. More specifically, the closure drive nut 2560 has a proximal end portion 2562 that is rotatably supported relative to the elongated channel 2522 and the spine tube 2540. For assembly purposes, the proximal end portion 2562 is threadably attached to a retention ring 2570. The retention ring 2570 is received in a groove 2529 formed between a shoulder 2527 on the proximal end 2523 of the elongated channel 2522 and the distal end 2541 of the spine tube 2540. Such arrangement serves to rotatably support the closure drive nut 2560 within the elongated channel 2522. Rotation of the closure drive nut 2560 will cause the closure tube 2550 to move axially as represented by arrow “D” in FIG. 46.

[0224] Extending through the spine tube 2540 and the closure drive nut 2560 is a drive member which, in at least one embodiment, comprises a knife bar 2580 that has a distal end portion 2582 that is rotatably coupled to the cutting instrument 2532 such that the knife bar 2580 may rotate relative to the cutting instrument 2582. As can be seen in FIG. 46-51, the closure drive nut 2560 has a slot 2564 therein through which the knife bar 2580 can slidably extend. Such arrangement permits the knife bar 2580 to move axially relative to the closure drive nut 2560. However, rotation of the knife bar 2580 about the longitudinal tool axis LT-LT will also result in the rotation of the closure drive nut 2560. The axial direction in which the closure tube 2550 moves ultimately depends upon the direction in which the knife bar 2580 and the closure drive nut 2560 are rotated. As the closure tube 2550 is driven distally, the distal end thereof will contact the anvil 2524 and cause the anvil 2524 to pivot to a closed position. Upon application of an opening rotary output motion from the robotic system 1000, the closure tube 2550 will be driven in the proximal direction “PD” and pivot the anvil 2524 to the open position by virtue of the engagement of the tab 2527 with the opening 2555 in the closure tube 2550.

[0225] In use, it may be desirable to rotate the surgical end effector 2512 about the longitudinal tool axis LT-LT. In at least one embodiment, the tool mounting portion 2600 is configured to receive a corresponding first rotary output motion from the robotic system 1000 and convert that first rotary output motion to a rotary control motion for rotating the elongated shaft assembly 2508 about the longitudinal tool axis LT-LT. As can be seen in FIG. 44, a proximal end 2542 of the hollow spine tube 2540 is rotatably supported within a cradle arrangement 2603 attached to a tool mounting plate 2602 of the tool mounting portion 2600. Various embodiments of the surgical tool 2500 further include a transmission arrangement, generally depicted as 2605, that is operably supported on the tool mounting plate 2602. In various forms the transmission arrangement 2605 include a rotation gear 2544 that is formed on or attached to the proximal end 2542 of the spine tube 2540 for meshing engagement with a rotation drive assembly 2610 that is operably supported on the tool mounting plate 2602. In at least one embodiment, a rotation drive gear 2612 is coupled to a corresponding first one of the rotational bodies, driven discs or elements 1304 on the adapter side of the tool mounting plate 2602 when the tool mounting portion 2600 is coupled to the tool holder 1270. See FIGS. 28 and 49. The rotation drive assembly 2610 further comprises a rotary driven gear 2614 that is rotatably supported on the tool mounting plate 2602 in meshing engagement with the rotation gear 2544 and the rotation drive gear 2612. Application of a first rotary output motion from the robotic system 1000 through the tool drive assembly 1010 to the corresponding driven rotational body 1304 will thereby cause rotation of the rotation drive gear 2612 by virtue of being operably coupled thereto. Rotation of the rotation drive gear 2612 ultimately results in the rotation of the elongated shaft assembly 2508 (and the end effector 2512) about the longitudinal tool axis LT-LT.

[0226] Closure of the anvil 2524 relative to the surgical staple cartridge 2534 is accomplished by axially moving the closure tube 2550 in the distal direction “DD”. Axial movement of the closure tube 2550 in the distal direction “DD” is accomplished by applying a rotary control motion to the closure drive nut 2382. In various embodiments, the closure drive nut 2560 is rotated by applying a rotary output motion to the knife bar 2580. Rotation of the knife bar 2580 is controlled by applying rotary output motions to a rotary closure system 2620 that is operably supported on the tool mounting plate 2602 as shown in FIG. 49. In at least one embodiment, the rotary closure system 2620 includes a closure drive gear 2622 that is coupled to a corresponding second one of the driven rotatable body portions discs or elements 1304 on the adapter side of the tool mounting plate 2462 when the tool mounting portion 2600 is coupled to the tool holder 1270. See FIGS. 28 and 49. The closure drive gear 2622, in at least one embodiment, is in meshing driving engagement with a closure gear train, generally depicted as 2623. The closure gear drive train 2623 comprises a first driven closure gear 2624 that is rotatably supported on the tool mounting plate 2602. The first closure driven gear 2624 is attached to a second closure driven gear 2626 by a drive shaft 2628. The second closure driven gear 2626 is in meshing engagement with a third closure driven gear 2630 that is rotatably supported on the tool mounting plate 2602. Rotation of the closure drive gear 2622 in a second rotary direction will result in the rotation of the third closure driven gear 2630 in a second direction. Conversely, rotation of the closure drive gear 2483 in a sec-

ondary rotary direction (opposite to the second rotary direction) will cause the third closure driven gear 2630 to rotate in a secondary direction.

[0227] As can be seen in FIG. 49, a drive shaft assembly 2640 is coupled to a proximal end of the knife bar 2580. In various embodiments, the drive shaft assembly 2640 includes a proximal portion 2642 that has a square cross-sectional shape. The proximal portion 2642 is configured to slideably engage a correspondingly shaped aperture in the third driven gear 2630. Such arrangement results in the rotation of the drive shaft assembly 2640 (and knife bar 2580) when the third driven gear 2630 is rotated. The drive shaft assembly 2640 is axially advanced in the distal and proximal directions by a knife drive assembly 2650. One form of the knife drive assembly 2650 comprises a rotary drive gear 2652 that is coupled to a corresponding third one of the driven rotatable body portions, discs or elements 1304 on the adapter side of the tool mounting plate 2462 when the tool mounting portion 2600 is coupled to the tool holder 1270. See FIGS. 28 and 49. The rotary driven gear 2652 is in meshing driving engagement with a gear train, generally depicted as 2653. In at least one form, the gear train 2653 further comprises a first rotary driven gear assembly 2654 that is rotatably supported on the tool mounting plate 2602. The first rotary driven gear assembly 2654 is in meshing engagement with a third rotary driven gear assembly 2656 that is rotatably supported on the tool mounting plate 2602 and which is in meshing engagement with a fourth rotary driven gear assembly 2658 that is in meshing engagement with a threaded portion 2644 of the drive shaft assembly 2640. Rotation of the rotary drive gear 2652 in a third rotary direction will result in the axial advancement of the drive shaft assembly 2640 and knife bar 2580 in the distal direction “DD”. Conversely, rotation of the rotary drive gear 2652 in a tertiary rotary direction (opposite to the third rotary direction) will cause the drive shaft assembly 2640 and the knife bar 2580 to move in the proximal direction.

[0228] A method of operating the surgical tool 2500 will now be described. Once the tool mounting portion 2600 has been operably coupled to the tool holder 1270 of the robotic system 1000, the robotic system 1000 can orient the surgical end effector 2512 in position adjacent the target tissue to be cut and stapled. If the anvil 2524 is not already in the open position (FIG. 46), the robotic system 1000 may apply the second rotary output motion to the closure drive gear 2622 which results in the rotation of the knife bar 2580 in a second direction. Rotation of the knife bar 2580 in the second direction results in the rotation of the closure drive nut 2560 in a second direction. As the closure drive nut 2560 rotates in the second direction, the closure tube 2550 moves in the proximal direction “PD”. As the closure tube 2550 moves in the proximal direction “PD”, the tab 2527 on the anvil 2524 interfaces with the opening 2555 in the closure tube 2550 and causes the anvil 2524 to pivot to the open position. In addition or in alternative embodiments, a spring (not shown) may be employed to pivot the anvil 2524 to the open position when the closure tube 2550 has been returned to the starting position (FIG. 46). The opened surgical end effector 2512 may then be manipulated by the robotic system 1000 to position the target tissue between the open anvil 2524 and the surgical staple cartridge 2534. Thereafter, the surgeon may initiate the closure process by activating the robotic control system 1000 to apply the second rotary output motion to the closure drive gear 2622 which, as was described above, ultimately results

in the rotation of the closure drive nut 2382 in the second direction which results in the axial travel of the closure tube 2250 in the distal direction “DD”. As the closure tube 2550 moves in the distal direction, it contacts a portion of the anvil 2524 and causes the anvil 2524 to pivot to the closed position to clamp the target tissue between the anvil 2524 and the staple cartridge 2534. Once the robotic controller 1001 determines that the anvil 2524 has been pivoted to the closed position by corresponding sensor(s) in the end effector 2512 that are in communication therewith (not shown), the robotic controller 1001 discontinues the application of the second rotary output motion to the closure drive gear 2622. The robotic controller 1001 may also provide the surgeon with an indication that the anvil 2524 has been fully closed. The surgeon may then initiate the firing procedure. In alternative embodiments, the firing procedure may be automatically initiated by the robotic controller 1001.

[0229] After the robotic controller 1001 has determined that the anvil 2524 is in the closed position, the robotic controller 1001 then applies the third rotary output motion to the rotary drive gear 2652 which results in the axial movement of the drive shaft assembly 2640 and knife bar 2580 in the distal direction “DD”. As the cutting instrument 2532 moves distally through the surgical staple cartridge 2534, the tissue clamped therein is severed. As the sled portion (not shown) is driven distally, it causes the staples within the surgical staple cartridge 2534 to be driven through the severed tissue into forming contact with the anvil 2524. Once the robotic controller 1001 has determined that the cutting instrument 2532 has reached the end position within the surgical staple cartridge 2534 by means of sensor(s) (not shown) in the surgical end effector 2512 that are in communication with the robotic controller 1001, the robotic controller 1001 discontinues the application of the second rotary output motion to the rotary drive gear 2652. Thereafter, the robotic controller 1001 applies the secondary rotary control motion to the rotary drive gear 2652 which ultimately results in the axial travel of the cutting instrument 2532 and sled portion in the proximal direction “PD” to the starting position. Once the robotic controller 1001 has determined that the cutting instrument 2524 has reached the starting position by means of sensor(s) (not shown) in the end effector 2512 that are in communication with the robotic controller 1001, the robotic controller 1001 discontinues the application of the secondary rotary output motion to the rotary drive gear 2652. Thereafter, the robotic controller 1001 may apply the secondary rotary output motion to the closure drive gear 2622 which results in the rotation of the knife bar 2580 in a secondary direction. Rotation of the knife bar 2580 in the secondary direction results in the rotation of the closure drive nut 2560 in a secondary direction. As the closure drive nut 2560 rotates in the secondary direction, the closure tube 2550 moves in the proximal direction “PD” to the open position.

[0230] FIGS. 50-55B illustrate yet another surgical tool 2700 that may be effectively employed in connection with the robotic system 1000. In various forms, the surgical tool 2700 includes a surgical end effector 2712 that includes a “first portion” in the form of an elongated channel 2722 and a “second movable portion” in on form comprising a pivotally translatable clamping member, such as an anvil 2724, which are maintained at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector 2712. As shown in the illustrated embodiment, the surgical end effector 2712 may include, in addition to the previously-

mentioned channel 2722 and anvil 2724, a “third movable portion” in the form of a cutting instrument 2732, a sled (not shown), and a surgical staple cartridge 2734 that is removably seated in the elongated channel 2722. The cutting instrument 2732 may be, for example, a knife. The anvil 2724 may be pivotably opened and closed at a pivot point 2725 connected to the proximal end of the elongated channel 2722. The anvil 2724 may also include a tab 2727 at its proximal end that interfaces with a component of the mechanical closure system (described further below) to open and close the anvil 2724. When actuated, the knife 2732 and sled to travel longitudinally along the elongated channel 2722, thereby cutting tissue clamped within the surgical end effector 2712. The movement of the sled along the elongated channel 2722 causes the staples of the surgical staple cartridge 2734 to be driven through the severed tissue and against the closed anvil 2724, which turns the staples to fasten the severed tissue. In one form, the elongated channel 2722 and the anvil 2724 may be made of an electrically conductive material (such as metal) so that they may serve as part of the antenna that communicates with sensor(s) in the surgical end effector, as described above. The surgical staple cartridge 2734 could be made of a nonconductive material (such as plastic) and the sensor may be connected to or disposed in the surgical staple cartridge 2734, as described above.

[0231] It should be noted that although the embodiments of the surgical tool 2500 described herein employ a surgical end effector 2712 that staples the severed tissue, in other embodiments different techniques for fastening or sealing the severed tissue may be used. For example, end effectors that use RF energy or adhesives to fasten the severed tissue may also be used. U.S. Pat. No. 5,709,680, entitled ELECTROSURGICAL HEMOSTATIC DEVICE, and U.S. Pat. No. 5,688,270, entitled ELECTROSURGICAL HEMOSTATIC DEVICE WITH RECESSED AND/OR OFFSET ELECTRODES, which are incorporated herein by reference, discloses cutting instruments that use RF energy to fasten the severed tissue. U.S. patent application Ser. No. 11/267,811, now U.S. Pat. No. 7,673,783 and U.S. patent application Ser. No. 11/267,383, now U.S. Pat. No. 7,607,557, which are also incorporated herein by reference, disclose cutting instruments that use adhesives to fasten the severed tissue. Accordingly, although the description herein refers to cutting/stapling operations and the like, it should be recognized that this is an exemplary embodiment and is not meant to be limiting. Other tissue-fastening techniques may also be used.

[0232] In the illustrated embodiment, the elongated channel 2722 of the surgical end effector 2712 is coupled to an elongated shaft assembly 2708 that is coupled to a tool mounting portion 2900. Although not shown, the elongated shaft assembly 2708 may include an articulation joint to permit the surgical end effector 2712 to be selectively articulated about an axis that is substantially transverse to the tool axis LT-LT. In at least one embodiment, the elongated shaft assembly 2708 comprises a hollow spine tube 2740 that is non-movably coupled to a tool mounting plate 2902 of the tool mounting portion 2900. As can be seen in FIGS. 51 and 52, the proximal end 2723 of the elongated channel 2722 comprises a hollow tubular structure that is attached to the spine tube 2740 by means of a mounting collar 2790. A cross-sectional view of the mounting collar 2790 is shown in FIG. 53. In various embodiments, the mounting collar 2790 has a proximal flanged end 2791 that is configured for attachment to the distal end of the spine tube 2740. In at least one

embodiment, for example, the proximal flanged end 2791 of the mounting collar 2790 is welded or glued to the distal end of the spine tube 2740. As can be further seen in FIGS. 51 and 52, the mounting collar 2790 further has a mounting hub portion 2792 that is sized to receive the proximal end 2723 of the elongated channel 2722 thereon. The proximal end 2723 of the elongated channel 2722 is non-movably attached to the mounting hub portion 2792 by, for example, welding, adhesive, etc.

[0233] As can be further seen in FIGS. 51 and 52, the surgical tool 2700 further includes an axially movable actuation member in the form of a closure tube 2750 that is constrained to move axially relative to the elongated channel 2722. The closure tube 2750 has a proximal end 2752 that has an internal thread 2754 formed therein that is in threaded engagement with a rotatably movable portion in the form of a closure drive nut 2760. More specifically, the closure drive nut 2760 has a proximal end portion 2762 that is rotatably supported relative to the elongated channel 2722 and the spine tube 2740. For assembly purposes, the proximal end portion 2762 is threadably attached to a retention ring 2770. The retention ring 2770 is received in a groove 2729 formed between a shoulder 2727 on the proximal end 2723 of the channel 2722 and the mounting hub 2729 of the mounting collar 2790. Such arrangement serves to rotatably support the closure drive nut 2760 within the channel 2722. Rotation of the closure drive nut 2760 will cause the closure tube 2750 to move axially as represented by arrow “D” in FIG. 51.

[0234] Extending through the spine tube 2740, the mounting collar 2790, and the closure drive nut 2760 is a drive member, which in at least one embodiment, comprises a knife bar 2780 that has a distal end portion 2782 that is coupled to the cutting instrument 2732. As can be seen in FIGS. 51 and 52, the mounting collar 2790 has a passage 2793 therethrough for permitting the knife bar 2780 to slidably pass there-through. Similarly, the closure drive nut 2760 has a slot 2764 therein through which the knife bar 2780 can slidably extend. Such arrangement permits the knife bar 2780 to move axially relative to the closure drive nut 2760.

[0235] Actuation of the anvil 2724 is controlled by a rotary driven closure shaft 2800. As can be seen in FIGS. 51 and 52, a distal end portion 2802 of the closure drive shaft 2800 extends through a passage 2794 in the mounting collar 2790 and a closure gear 2804 is attached thereto. The closure gear 2804 is configured for driving engagement with the inner surface 2761 of the closure drive nut 2760. Thus, rotation of the closure shaft 2800 will also result in the rotation of the closure drive nut 2760. The axial direction in which the closure tube 2750 moves ultimately depends upon the direction in which the closure shaft 2800 and the closure drive nut 2760 are rotated. For example, in response to one rotary closure motion received from the robotic system 1000, the closure tube 2750 will be driven in the distal direction “DD”. As the closure tube 2750 is driven distally, the opening 2745 will engage the tab 2727 on the anvil 2724 and cause the anvil 2724 to pivot to a closed position. Upon application of an opening rotary motion from the robotic system 1000, the closure tube 2750 will be driven in the proximal direction “PD” and pivot the anvil 2724 to the open position. In various embodiments, a spring (not shown) may be employed to bias the anvil 2724 to the open position (FIG. 51).

[0236] In use, it may be desirable to rotate the surgical end effector 2712 about the longitudinal tool axis LT-LT. In at least one embodiment, the tool mounting portion 2900 is

configured to receive a corresponding first rotary output motion from the robotic system 1000 for rotating the elongated shaft assembly 2708 about the tool axis LT-LT. As can be seen in FIG. 55, a proximal end 2742 of the hollow spine tube 2740 is rotatably supported within a cradle arrangement 2903 and a bearing assembly 2904 that are attached to a tool mounting plate 2902 of the tool mounting portion 2900. A rotation gear 2744 is formed on or attached to the proximal end 2742 of the spine tube 2740 for meshing engagement with a rotation drive assembly 2910 that is operably supported on the tool mounting plate 2902. In at least one embodiment, a rotation drive gear 2912 is coupled to a corresponding first one of the driven discs or elements 1304 on the adapter side of the tool mounting plate 2602 when the tool mounting portion 2600 is coupled to the tool holder 1270. See FIGS. 28 and 55. The rotation drive assembly 2910 further comprises a rotary driven gear 2914 that is rotatably supported on the tool mounting plate 2902 in meshing engagement with the rotation gear 2744 and the rotation drive gear 2912. Application of a first rotary control motion from the robotic system 1000 through the tool holder 1270 and the adapter 1240 to the corresponding driven element 1304 will thereby cause rotation of the rotation drive gear 2912 by virtue of being operably coupled thereto. Rotation of the rotation drive gear 2912 ultimately results in the rotation of the elongated shaft assembly 2708 (and the end effector 2712) about the longitudinal tool axis LT-LT (primary rotary motion).

[0237] Closure of the anvil 2724 relative to the staple cartridge 2734 is accomplished by axially moving the closure tube 2750 in the distal direction “DD”. Axial movement of the closure tube 2750 in the distal direction “DD” is accomplished by applying a rotary control motion to the closure drive nut 2760. In various embodiments, the closure drive nut 2760 is rotated by applying a rotary output motion to the closure drive shaft 2800. As can be seen in FIG. 55, a proximal end portion 2806 of the closure drive shaft 2800 has a driven gear 2808 thereon that is in meshing engagement with a closure drive assembly 2920. In various embodiments, the closure drive system 2920 includes a closure drive gear 2922 that is coupled to a corresponding second one of the driven rotational bodies or elements 1304 on the adapter side of the tool mounting plate 2462 when the tool mounting portion 2900 is coupled to the tool holder 1270. See FIGS. 28 and 55. The closure drive gear 2922 is supported in meshing engagement with a closure gear train, generally depicted as 2923. In at least one form, the closure gear train 2923 comprises a first driven closure gear 2924 that is rotatably supported on the tool mounting plate 2902. The first closure driven gear 2924 is attached to a second closure driven gear 2926 by a drive shaft 2928. The second closure driven gear 2926 is in meshing engagement with a planetary gear assembly 2930. In various embodiments, the planetary gear assembly 2930 includes a driven planetary closure gear 2932 that is rotatably supported within the bearing assembly 2904 that is mounted on tool mounting plate 2902. As can be seen in FIGS. 55 and 55B, the proximal end portion 2806 of the closure drive shaft 2800 is rotatably supported within the proximal end portion 2742 of the spine tube 2740 such that the driven gear 2808 is in meshing engagement with central gear teeth 2934 formed on the planetary gear 2932. As can also be seen in FIG. 55A, two additional support gears 2936 are attached to or rotatably supported relative to the proximal end portion 2742 of the spine tube 2740 to provide bearing support thereto. Such arrangement with the planetary gear assembly 2930 serves to

accommodate rotation of the spine shaft 2740 by the rotation drive assembly 2910 while permitting the closure driven gear 2808 to remain in meshing engagement with the closure drive system 2920. In addition, rotation of the closure drive gear 2922 in a first direction will ultimately result in the rotation of the closure drive shaft 2800 and closure drive nut 2760 which will ultimately result in the closure of the anvil 2724 as described above. Conversely, rotation of the closure drive gear 2922 in a second opposite direction will ultimately result in the rotation of the closure drive nut 2760 in an opposite direction which results in the opening of the anvil 2724.

[0238] As can be seen in FIG. 55, the proximal end 2784 of the knife bar 2780 has a threaded shaft portion 2786 attached thereto which is in driving engagement with a knife drive assembly 2940. In various embodiments, the threaded shaft portion 2786 is rotatably supported by a bearing 2906 attached to the tool mounting plate 2902. Such arrangement permits the threaded shaft portion 2786 to rotate and move axially relative to the tool mounting plate 2902. The knife bar 2780 is axially advanced in the distal and proximal directions by the knife drive assembly 2940. One form of the knife drive assembly 2940 comprises a rotary drive gear 2942 that is coupled to a corresponding third one of the rotatable bodies, driven discs or elements 1304 on the adapter side of the tool mounting plate 2902 when the tool mounting portion 2900 is coupled to the tool holder 1270. See FIGS. 28 and 55. The rotary drive gear 2942 is in meshing engagement with a knife gear train, generally depicted as 2943. In various embodiments, the knife gear train 2943 comprises a first rotary driven gear assembly 2944 that is rotatably supported on the tool mounting plate 2902. The first rotary driven gear assembly 2944 is in meshing engagement with a third rotary driven gear assembly 2946 that is rotatably supported on the tool mounting plate 2902 and which is in meshing engagement with a fourth rotary driven gear assembly 2948 that is in meshing engagement with the threaded portion 2786 of the knife bar 2780. Rotation of the rotary drive gear 2942 in one direction will result in the axial advancement of the knife bar 2780 in the distal direction “DD”. Conversely, rotation of the rotary drive gear 2942 in an opposite direction will cause the knife bar 2780 to move in the proximal direction. Tool 2700 may otherwise be used as described above.

[0239] FIGS. 56 and 57 illustrate a surgical tool embodiment 2700 that is substantially identical to tool 2700 that was described in detail above. However tool 2700' includes a pressure sensor 2950 that is configured to provide feedback to the robotic controller 1001 concerning the amount of clamping pressure experienced by the anvil 2724. In various embodiments, for example, the pressure sensor may comprise a spring biased contact switch. For a continuous signal, it would use either a cantilever beam with a strain gage on it or a dome button top with a strain gage on the inside. Another version may comprise an off switch that contacts only at a known desired load. Such arrangement would include a dome on the base wherein the dome is one electrical pole and the base is the other electrical pole. Such arrangement permits the robotic controller 1001 to adjust the amount of clamping pressure being applied to the tissue within the surgical end effector 2712 by adjusting the amount of closing pressure applied to the anvil 2724. Those of ordinary skill in the art will understand that such pressure sensor arrangement may be effectively employed with several of the surgical tool embodiments described herein as well as their equivalent structures.

[0240] FIG. 58 illustrates a portion of another surgical tool 3000 that may be effectively used in connection with a robotic system 1000. The surgical tool 3003 employs on-board motor (s) for powering various components of a surgical end effector cutting instrument. In at least one non-limiting embodiment for example, the surgical tool 3000 includes a surgical end effector in the form of an endocutter (not shown) that has an anvil (not shown) and surgical staple cartridge arrangement (not shown) of the types and constructions described above. The surgical tool 3000 also includes an elongated shaft (not shown) and anvil closure arrangement (not shown) of the types described above. Thus, this portion of the Detailed Description will not repeat the description of those components beyond that which is necessary to appreciate the unique and novel attributes of the various embodiments of surgical tool 3000.

[0241] In the depicted embodiment, the end effector includes a cutting instrument 3002 that is coupled to a knife bar 3003. As can be seen in FIG. 58, the surgical tool 3000 includes a tool mounting portion 3010 that includes a tool mounting plate 3012 that is configured to mountably interface with the adaptor portion 1240' which is coupled to the robotic system 1000 in the various manners described above. The tool mounting portion 3010 is configured to operably support a transmission arrangement 3013 thereon. In at least one embodiment, the adaptor portion 1240' may be identical to the adaptor portion 1240 described in detail above without the powered rotation bodies and disc members employed by adaptor 1240. In other embodiments, the adaptor portion 1240' may be identical to adaptor portion 1240. Still other modifications which are considered to be within the spirit and scope of the various forms of the present invention may employ one or more of the mechanical motions (i.e., rotary motion(s)) from the tool holder portion 1270 (as described hereinabove) to power/actuate the transmission arrangement 3013 while also employing one or more motors within the tool mounting portion 3010 to power one or more other components of the surgical end effector. In addition, while the end effector of the depicted embodiment comprises an endocutter, those of ordinary skill in the art will understand that the unique and novel attributes of the depicted embodiment may be effectively employed in connection with other types of surgical end effectors without departing from the spirit and scope of various forms of the present invention.

[0242] In various embodiments, the tool mounting plate 3012 is configured to at least house a first firing motor 3011 for supplying firing and retraction motions to the knife bar 3003 which is coupled to or otherwise operably interfaces with the cutting instrument 3002. The tool mounting plate 3012 has an array of electrical connecting pins 3014 which are configured to interface with the slots 1258 (FIG. 27) in the adapter 1240'. Such arrangement permits the controller 1001 of the robotic system 1000 to provide control signals to the electronic control circuit 3020 of the surgical tool 3000. While the interface is described herein with reference to mechanical, electrical, and magnetic coupling elements, it should be understood that a wide variety of telemetry modalities might be used, including infrared, inductive coupling, or the like.

[0243] Control circuit 3020 is shown in schematic form in FIG. 58. In one form or embodiment, the control circuit 3020 includes a power supply in the form of a battery 3022 that is coupled to an on-off solenoid powered switch 3024. Control circuit 3020 further includes an on/off firing solenoid 3026

that is coupled to a double pole switch 3028 for controlling the rotational direction of the motor 3011. Thus, when the controller 1001 of the robotic system 1000 supplies an appropriate control signal, switch 3024 will permit battery 3022 to supply power to the double pole switch 3028. The controller 1001 of the robotic system 1000 will also supply an appropriate signal to the double pole switch 3028 to supply power to the motor 3011. When it is desired to fire the surgical end effector (i.e., drive the cutting instrument 3002 distally through tissue clamped in the surgical end effector, the double pole switch 3028 will be in a first position. When it is desired to retract the cutting instrument 3002 to the starting position, the double pole switch 3028 will be moved to the second position by the controller 1001.

[0244] Various embodiments of the surgical tool 3000 also employ a gear box 3030 that is sized, in cooperation with a firing gear train 3031 that, in at least one non-limiting embodiment, comprises a firing drive gear 3032 that is in meshing engagement with a firing driven gear 3034 for generating a desired amount of driving force necessary to drive the cutting instrument 3002 through tissue and to drive and form staples in the various manners described herein. In the embodiment depicted in FIG. 58, the driven gear 3034 is coupled to a screw shaft 3036 that is in threaded engagement with a screw nut arrangement 3038 that is constrained to move axially (represented by arrow "D"). The screw nut arrangement 3038 is attached to the firing bar 3003. Thus, by rotating the screw shaft 3036 in a first direction, the cutting instrument 3002 is driven in the distal direction "DD" and rotating the screw shaft in an opposite second direction, the cutting instrument 3002 may be retracted in the proximal direction "PD".

[0245] FIG. 59 illustrates a portion of another surgical tool 3000' that is substantially identical to tool 3000 described above, except that the driven gear 3034 is attached to a drive shaft 3040. The drive shaft 3040 is attached to a second driver gear 3042 that is in meshing engagement with a third driven gear 3044 that is in meshing engagement with a screw 3046 coupled to the firing bar 3003.

[0246] FIG. 60 illustrates another surgical tool 3200 that may be effectively used in connection with a robotic system 1000. In this embodiment, the surgical tool 3200 includes a surgical end effector 3212 that in one non-limiting form, comprises a component portion that is selectively movable between first and second positions relative to at least one other end effector component portion. As will be discussed in further detail below, the surgical tool 3200 employs on-board motors for powering various components of a transmission arrangement 3305. The surgical end effector 3212 includes an elongated channel 3222 that operably supports a surgical staple cartridge 3234. The elongated channel 3222 has a proximal end 3223 that slidably extends into a hollow elongated shaft assembly 3208 that is coupled to a tool mounting portion 3300. In addition, the surgical end effector 3212 includes an anvil 3224 that is pivotally coupled to the elongated channel 3222 by a pair of trunnions 3225 that are received within corresponding openings 3229 in the elongated channel 3222. A distal end portion 3209 of the shaft assembly 3208 includes an opening 3245 into which a tab 3227 on the anvil 3224 is inserted in order to open the anvil 3224 as the elongated channel 3222 is moved axially in the proximal direction "PD" relative to the distal end portion

3209 of the shaft assembly **3208**. In various embodiments, a spring (not shown) may be employed to bias the anvil **3224** to the open position.

[0247] As indicated above, the surgical tool **3200** includes a tool mounting portion **3300** that includes a tool mounting plate **3302** that is configured to operably support the transmission arrangement **3305** and to mountingly interface with the adaptor portion **1240'** which is coupled to the robotic system **1000** in the various manners described above. In at least one embodiment, the adaptor portion **1240'** may be identical to the adaptor portion **1240** described in detail above without the powered disc members employed by adapter **1240**. In other embodiments, the adaptor portion **1240'** may be identical to adaptor portion **1240**. However, in such embodiments, because the various components of the surgical end effector **3212** are all powered by motor(s) in the tool mounting portion **3300**, the surgical tool **3200** will not employ or require any of the mechanical (i.e., non-electrical) actuation motions from the tool holder portion **1270** to power the surgical end effector **3200** components. Still other modifications which are considered to be within the spirit and scope of the various forms of the present invention may employ one or more of the mechanical motions from the tool holder portion **1270** (as described hereinabove) to power/actuate one or more of the surgical end effector components while also employing one or more motors within the tool mounting portion to power one or more other components of the surgical end effector.

[0248] In various embodiments, the tool mounting plate **3302** is configured to support a first firing motor **3310** for supplying firing and retraction motions to the transmission arrangement **3305** to drive a knife bar **3335** that is coupled to a cutting instrument **3332** of the type described above. As can be seen in FIG. 60, the tool mounting plate **3212** has an array of electrical connecting pins **3014** which are configured to interface with the slots **1258** (FIG. 27) in the adapter **1240'**. Such arrangement permits the controller **1001** of the robotic system **1000** to provide control signals to the electronic control circuits **3320**, **3340** of the surgical tool **3200**. While the interface is described herein with reference to mechanical, electrical, and magnetic coupling elements, it should be understood that a wide variety of telemetry modalities might be used, including infrared, inductive coupling, or the like.

[0249] In one form or embodiment, the first control circuit **3320** includes a first power supply in the form of a first battery **3322** that is coupled to a first on-off solenoid powered switch **3324**. The first firing control circuit **3320** further includes a first on/off firing solenoid **3326** that is coupled to a first double pole switch **3328** for controlling the rotational direction of the first firing motor **3310**. Thus, when the robotic controller **1001** supplies an appropriate control signal, the first switch **3324** will permit the first battery **3322** to supply power to the first double pole switch **3328**. The robotic controller **1001** will also supply an appropriate signal to the first double pole switch **3328** to supply power to the first firing motor **3310**. When it is desired to fire the surgical end effector (i.e., drive the cutting instrument **3232** distally through tissue clamped in the surgical end effector **3212**, the first switch **3328** will be positioned in a first position by the robotic controller **1001**. When it is desired to retract the cutting instrument **3232** to the starting position, the robotic controller **1001** will send the appropriate control signal to move the first switch **3328** to the second position.

[0250] Various embodiments of the surgical tool **3200** also employ a first gear box **3330** that is sized, in cooperation with a firing drive gear **3332** coupled thereto that operably interfaces with a firing gear train **3333**. In at least one non-limiting embodiment, the firing gear train **333** comprises a firing driven gear **3334** that is in meshing engagement with drive gear **3332**, for generating a desired amount of driving force necessary to drive the cutting instrument **3232** through tissue and to drive and form staples in the various manners described herein. In the embodiment depicted in FIG. 60, the driven gear **3334** is coupled to a drive shaft **3335** that has a second driven gear **3336** coupled thereto. The second driven gear **3336** is supported in meshing engagement with a third driven gear **3337** that is in meshing engagement with a fourth driven gear **3338**. The fourth driven gear **3338** is in meshing engagement with a threaded proximal portion **3339** of the knife bar **3235** that is constrained to move axially. Thus, by rotating the drive shaft **3335** in a first direction, the cutting instrument **3232** is driven in the distal direction "DD" and rotating the drive shaft **3335** in an opposite second direction, the cutting instrument **3232** may be retracted in the proximal direction "PD".

[0251] As indicated above, the opening and closing of the anvil **3224** is controlled by axially moving the elongated channel **3222** relative to the elongated shaft assembly **3208**. The axial movement of the elongated channel **3222** is controlled by a closure control system **3339**. In various embodiments, the closure control system **3339** includes a closure shaft **3340** which has a hollow threaded end portion **3341** that threadably engages a threaded closure rod **3342**. The threaded end portion **3341** is rotatably supported in a spine shaft **3343** that operably interfaces with the tool mounting portion **3300** and extends through a portion of the shaft assembly **3208** as shown. The closure system **3339** further comprises a closure control circuit **3350** that includes a second power supply in the form of a second battery **3352** that is coupled to a second on-off solenoid powered switch **3354**. Closure control circuit **3350** further includes a second on/off firing solenoid **3356** that is coupled to a second double pole switch **3358** for controlling the rotation of a second closure motor **3360**. Thus, when the robotic controller **1001** supplies an appropriate control signal, the second switch **3354** will permit the second battery **3352** to supply power to the second double pole switch **3354**. The robotic controller **1001** will also supply an appropriate signal to the second double pole switch **3358** to supply power to the second motor **3360**. When it is desired to close the anvil **3224**, the second switch **3348** will be in a first position. When it is desired to open the anvil **3224**, the second switch **3348** will be moved to a second position.

[0252] Various embodiments of tool mounting portion **3300** also employ a second gear box **3362** that is coupled to a closure drive gear **3364**. The closure drive gear **3364** is in meshing engagement with a closure gear train **3363**. In various non-limiting forms, the closure gear train **3363** includes a closure driven gear **3365** that is attached to a closure drive shaft **3366**. Also attached to the closure drive shaft **3366** is a closure drive gear **3367** that is in meshing engagement with a closure shaft gear **3360** attached to the closure shaft **3340**. FIG. 60 depicts the end effector **3212** in the open position. As indicated above, when the threaded closure rod **3342** is in the position depicted in FIG. 60, a spring (not shown) biases the anvil **3224** to the open position. When it is desired to close the anvil **3224**, the robotic controller **1001** will activate the second motor **3360** to rotate the closure shaft **3340** to draw the

threaded closure rod **3342** and the channel **3222** in the proximal direction 'PD'. As the anvil **3224** contacts the distal end portion **3209** of the shaft **3208**, the anvil **3224** is pivoted to the closed position.

[0253] A method of operating the surgical tool **3200** will now be described. Once the tool mounting portion **3302** has been operably coupled to the tool holder **1270** of the robotic system **1000**, the robotic system **1000** can orient the end effector **3212** in position adjacent the target tissue to be cut and stapled. If the anvil **3224** is not already in the open position, the robotic controller **1001** may activate the second closure motor **3360** to drive the channel **3222** in the distal direction to the position depicted in FIG. 60. Once the robotic controller **1001** determines that the surgical end effector **3212** is in the open position by sensor(s) in the end effector and/or the tool mounting portion **3300**, the robotic controller **1001** may provide the surgeon with a signal to inform the surgeon that the anvil **3224** may then be closed. Once the target tissue is positioned between the open anvil **3224** and the surgical staple cartridge **3234**, the surgeon may then commence the closure process by activating the robotic controller **1001** to apply a closure control signal to the second closure motor **3360**. The second closure motor **3360** applies a rotary motion to the closure shaft **3340** to draw the channel **3222** in the proximal direction "PD" until the anvil **3224** has been pivoted to the closed position. Once the robotic controller **1001** determines that the anvil **3224** has been moved to the closed position by sensor(s) in the surgical end effector **3212** and/or in the tool mounting portion **3300** that are in communication with the robotic control system, the motor **3360** may be deactivated. Thereafter, the firing process may be commenced either manually by the surgeon activating a trigger, button, etc. on the controller **1001** or the controller **1001** may automatically commence the firing process.

[0254] To commence the firing process, the robotic controller **1001** activates the firing motor **3310** to drive the firing bar **3235** and the cutting instrument **3232** in the distal direction "DD". Once robotic controller **1001** has determined that the cutting instrument **3232** has moved to the ending position within the surgical staple cartridge **3234** by means of sensors (not shown) in the surgical end effector **3212** and/or the motor drive portion **3300**, the robotic controller **1001** may provide the surgeon with an indication signal. Thereafter the surgeon may manually activate the first motor **3310** to retract the cutting instrument **3232** to the starting position or the robotic controller **1001** may automatically activate the first motor **3310** to retract the cutting element **3232**.

[0255] The embodiment depicted in FIG. 60 does not include an articulation joint. FIGS. 61 and 62 illustrate surgical tools **3200'** and **3200''** that have end effectors **3212'**, **3212''**, respectively that may be employed with an elongated shaft embodiment that has an articulation joint of the various types disclosed herein. For example, as can be seen in FIG. 61, a threaded closure shaft **3342** is coupled to the proximal end **3223** of the elongated channel **3222** by a flexible cable or other flexible member **3345**. The location of an articulation joint (not shown) within the elongated shaft assembly **3208** will coincide with the flexible member **3345** to enable the flexible member **3345** to accommodate such articulation. In addition, in the above-described embodiment, the flexible member **3345** is rotatably affixed to the proximal end portion **3223** of the elongated channel **3222** to enable the flexible member **3345** to rotate relative thereto to prevent the flexible member **3229** from "winding up" relative to the channel

3222. Although not shown, the cutting element may be driven in one of the above described manners by a knife bar that can also accommodate articulation of the elongated shaft assembly. FIG. 62 depicts a surgical end effector **3212''** that is substantially identical to the surgical end effector **3212** described above, except that the threaded closure rod **3342** is attached to a closure nut **3347** that is constrained to only move axially within the elongated shaft assembly **3208**. The flexible member **3345** is attached to the closure nut **3347**. Such arrangement also prevents the threaded closure rod **3342** from winding-up the flexible member **3345**. A flexible knife bar **3235'** may be employed to facilitate articulation of the surgical end effector **3212''**.

[0256] The surgical tools **3200**, **3200'**, and **3200''** described above may also employ anyone of the cutting instrument embodiments described herein. As described above, the anvil of each of the end effectors of these tools is closed by drawing the elongated channel into contact with the distal end of the elongated shaft assembly. Thus, once the target tissue has been located between the staple cartridge **3234** and the anvil **3224**, the robotic controller **1001** can start to draw the channel **3222** inward into the shaft assembly **3208**. In various embodiments, however, to prevent the end effector **3212**, **3212'**, **3212''** from moving the target tissue with the end effector during this closing process, the controller **1001** may simultaneously move the tool holder and ultimately the tool such to compensate for the movement of the elongated channel **3222** so that, in effect, the target tissue is clamped between the anvil and the elongated channel without being otherwise moved.

[0257] FIGS. 63-65 depict another surgical tool embodiment **3201** that is substantially identical to surgical tool **3200''** described above, except for the differences discussed below. In this embodiment, the threaded closure rod **3342'** has variable pitched grooves. More specifically, as can be seen in FIG. 64, the closure rod **3342'** has a distal groove section **3380** and a proximal groove section **3382**. The distal and proximal groove sections **3380**, **3382** are configured for engagement with a lug **3390** supported within the hollow threaded end portion **3341'**. As can be seen in FIG. 64, the distal groove section **3380** has a finer pitch than the groove section **3382**. Thus, such variable pitch arrangement permits the elongated channel **3222** to be drawn into the shaft **3208** at a first speed or rate by virtue of the engagement between the lug **3390** and the proximal groove segment **3382**. When the lug **3390** engages the distal groove segment, the channel **3222** will be drawn into the shaft **3208** at a second speed or rate. Because the proximal groove segment **3382** is coarser than the distal groove segment **3380**, the first speed will be greater than the second speed. Such arrangement serves to speed up the initial closing of the end effector for tissue manipulation and then after the tissue has been properly positioned therein, generate the amount of closure forces to properly clamp the tissue for cutting and sealing. Thus, the anvil **3234** initially closes fast with a lower force and then applies a higher closing force as the anvil closes more slowly.

[0258] The surgical end effector opening and closing motions are employed to enable the user to use the end effector to grasp and manipulate tissue prior to fully clamping it in the desired location for cutting and sealing. The user may, for example, open and close the surgical end effector numerous times during this process to orient the end effector in a proper position which enables the tissue to be held in a desired location. Thus, in at least some embodiments, to produce the high loading for firing, the fine thread may require as many as

5-10 full rotations to generate the necessary load. In some cases, for example, this action could take as long as 2-5 seconds. If it also took an equally long time to open and close the end effector each time during the positioning/tissue manipulation process, just positioning the end effector may take an undesirably long time. If that happens, it is possible that a user may abandon such use of the end effector for use of a conventional grasper device. Use of graspers, etc. may undesirably increase the costs associated with completing the surgical procedure.

[0259] The above-described embodiments employ a battery or batteries to power the motors used to drive the end effector components. Activation of the motors is controlled by the robotic system 1000. In alternative embodiments, the power supply may comprise alternating current “AC” that is supplied to the motors by the robotic system 1000. That is, the AC power would be supplied from the system powering the robotic system 1000 through the tool holder and adapter. In still other embodiments, a power cord or tether may be attached to the tool mounting portion 3300 to supply the requisite power from a separate source of alternating or direct current.

[0260] In use, the controller 1001 may apply an initial rotary motion to the closure shaft 3340 (FIG. 60) to draw the elongated channel 3222 axially inwardly into the elongated shaft assembly 3208 and move the anvil from a first position to an intermediate position at a first rate that corresponds with the point wherein the distal groove section 3380 transitions to the proximal groove section 3382. Further application of rotary motion to the closure shaft 3340 will cause the anvil to move from the intermediate position to the closed position relative to the surgical staple cartridge. When in the closed position, the tissue to be cut and stapled is properly clamped between the anvil and the surgical staple cartridge.

[0261] FIGS. 66-69 illustrate another surgical tool embodiment 3400 of the present invention. This embodiment includes an elongated shaft assembly 3408 that extends from a tool mounting portion 3500. The elongated shaft assembly 3408 includes a rotatable proximal closure tube segment 3410 that is rotatably journaled on a proximal spine member 3420 that is rigidly coupled to a tool mounting plate 3502 of the tool mounting portion 3500. The proximal spine member 3420 has a distal end 3422 that is coupled to an elongated channel portion 3522 of a surgical end effector 3412. For example, in at least one embodiment, the elongated channel portion 3522 has a distal end portion 3523 that “hookingly engages” the distal end 3422 of the spine member 3420. The elongated channel 3522 is configured to support a surgical staple cartridge 3534 therein. This embodiment may employ one of the various cutting instrument embodiments disclosed herein to sever tissue that is clamped in the surgical end effector 3412 and fire the staples in the staple cartridge 3534 into the severed tissue.

[0262] Surgical end effector 3412 has an anvil 3524 that is pivotally coupled to the elongated channel 3522 by a pair of trunnions 3525 that are received in corresponding openings 3529 in the elongated channel 3522. The anvil 3524 is moved between the open (FIG. 66) and closed positions (FIGS. 67-69) by a distal closure tube segment 3430. A distal end portion 3432 of the distal closure tube segment 3430 includes an opening 3445 into which a tab 3527 on the anvil 3524 is inserted in order to open and close the anvil 3524 as the distal closure tube segment 3430 moves axially relative thereto. In various embodiments, the opening 3445 is shaped such that as

the closure tube segment 3430 is moved in the proximal direction, the closure tube segment 3430 causes the anvil 3524 to pivot to an open position. In addition or in the alternative, a spring (not shown) may be employed to bias the anvil 3524 to the open position.

[0263] As can be seen in FIGS. 66-69, the distal closure tube segment 3430 includes a lug 3442 that extends from its distal end 3440 into threaded engagement with a variable pitch groove/thread 3414 formed in the distal end 3412 of the rotatable proximal closure tube segment 3410. The variable pitch groove/thread 3414 has a distal section 3416 and a proximal section 3418. The pitch of the distal groove/thread section 3416 is finer than the pitch of the proximal groove/thread section 3418. As can also be seen in FIGS. 66-69, the distal closure tube segment 3430 is constrained for axial movement relative to the spine member 3420 by an axial retainer pin 3450 that is received in an axial slot 3424 in the distal end of the spine member 3420.

[0264] As indicated above, the anvil 2524 is open and closed by rotating the proximal closure tube segment 3410. The variable pitch thread arrangement permits the distal closure tube segment 3430 to be driven in the distal direction “DD” at a first speed or rate by virtue of the engagement between the lug 3442 and the proximal groove/thread section 3418. When the lug 3442 engages the distal groove/thread section 3416, the distal closure tube segment 3430 will be driven in the distal direction at a second speed or rate. Because the proximal groove/thread section 3418 is coarser than the distal groove/thread segment 3416, the first speed will be greater than the second speed.

[0265] In at least one embodiment, the tool mounting portion 3500 is configured to receive a corresponding first rotary motion from the robotic controller 1001 and convert that first rotary motion to a primary rotary motion for rotating the rotatable proximal closure tube segment 3410 about a longitudinal tool axis LT-LT. As can be seen in FIG. 70, a proximal end 3460 of the proximal closure tube segment 3410 is rotatably supported within a cradle arrangement 3504 attached to a tool mounting plate 3502 of the tool mounting portion 3500. A rotation gear 3462 is formed on or attached to the proximal end 3460 of the closure tube segment 3410 for meshing engagement with a rotation drive assembly 3470 that is operably supported on the tool mounting plate 3502. In at least one embodiment, a rotation drive gear 3472 is coupled to a corresponding first one of the driven discs or elements 1304 on the adapter side of the tool mounting plate 3502 when the tool mounting portion 3500 is coupled to the tool holder 1270. See FIGS. 28 and 70. The rotation drive assembly 3470 further comprises a rotary driven gear 3474 that is rotatably supported on the tool mounting plate 3502 in meshing engagement with the rotation gear 3462 and the rotation drive gear 3472. Application of a first rotary control motion from the robotic controller 1001 through the tool holder 1270 and the adapter 1240 to the corresponding driven element 1304 will thereby cause rotation of the rotation drive gear 3472 by virtue of being operably coupled thereto. Rotation of the rotation drive gear 3472 ultimately results in the rotation of the closure tube segment 3410 to open and close the anvil 3524 as described above.

[0266] As indicated above, the surgical end effector 3412 employs a cutting instrument of the type and constructions described above. FIG. 70 illustrates one form of knife drive assembly 3480 for axially advancing a knife bar 3492 that is attached to such cutting instrument. One form of the knife

drive assembly **3480** comprises a rotary drive gear **3482** that is coupled to a corresponding third one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **3502** when the tool drive portion **3500** is coupled to the tool holder **1270**. See FIGS. **28** and **70**. The knife drive assembly **3480** further comprises a first rotary driven gear assembly **3484** that is rotatably supported on the tool mounting plate **5200**. The first rotary driven gear assembly **3484** is in meshing engagement with a third rotary driven gear assembly **3486** that is rotatably supported on the tool mounting plate **3502** and which is in meshing engagement with a fourth rotary driven gear assembly **3488** that is in meshing engagement with a threaded portion **3494** of drive shaft assembly **3490** that is coupled to the knife bar **3492**. Rotation of the rotary drive gear **3482** in a second rotary direction will result in the axial advancement of the drive shaft assembly **3490** and knife bar **3492** in the distal direction “DD”. Conversely, rotation of the rotary drive gear **3482** in a secondary rotary direction (opposite to the second rotary direction) will cause the drive shaft assembly **3490** and the knife bar **3492** to move in the proximal direction.

[0267] FIGS. **71-80** illustrate another surgical tool **3600** embodiment of the present invention that may be employed in connection with a robotic system **1000**. As can be seen in FIG. **71**, the tool **3600** includes an end effector in the form of a disposable loading unit **3612**. Various forms of disposable loading units that may be employed in connection with tool **3600** are disclosed, for example, in U.S. Patent Application Publication No. 2009/0206131, entitled END EFFECTOR ARRANGEMENTS FOR A SURGICAL CUTTING AND STAPLING INSTRUMENT, the disclosure of which is herein incorporated by reference in its entirety.

[0268] In at least one form, the disposable loading unit **3612** includes an anvil assembly **3620** that is supported for pivotal travel relative to a carrier **3630** that operably supports a staple cartridge **3640** therein. A mounting assembly **3650** is pivotally coupled to the cartridge carrier **3630** to enable the carrier **3630** to pivot about an articulation axis AA-AA relative to a longitudinal tool axis LT-LT. Referring to FIG. **76**, mounting assembly **3650** includes upper and lower mounting portions **3652** and **3654**. Each mounting portion includes a threaded bore **3656** on each side thereof dimensioned to receive threaded bolts (not shown) for securing the proximal end of carrier **3630** thereto. A pair of centrally located pivot members **3658** extends between upper and lower mounting portions via a pair of coupling members **3660** which engage a distal end of a housing portion **3662**. Coupling members **3660** each include an interlocking proximal portion **3664** configured to be received in grooves **3666** formed in the proximal end of housing portion **3662** to retain mounting assembly **3650** and housing portion **3662** in a longitudinally fixed position in relation thereto.

[0269] In various forms, housing portion **3662** of disposable loading unit **3614** includes an upper housing half **3670** and a lower housing half **3672** contained within an outer casing **3674**. The proximal end of housing half **3670** includes engagement nubs **3676** for releasably engaging an elongated shaft **3700** and an insertion tip **3678**. Nubs **3676** form a bayonet-type coupling with the distal end of the elongated shaft **3700** which will be discussed in further detail below. Housing halves **3670**, **3672** define a channel **3674** for slidably receiving axial drive assembly **3680**. A second articulation link **3690** is dimensioned to be slidably positioned within a slot **3679** formed between housing halves **3670**, **3672**. A pair

of blow out plates **3691** are positioned adjacent the distal end of housing portion **3662** adjacent the distal end of axial drive assembly **3680** to prevent outward bulging of drive assembly **3680** during articulation of carrier **3630**.

[0270] In various embodiments, the second articulation link **3690** includes at least one elongated metallic plate. Preferably, two or more metallic plates are stacked to form link **3690**. The proximal end of articulation link **3690** includes a hook portion **3692** configured to engage first articulation link **3710** extending through the elongated shaft **3700**. The distal end of the second articulation link **3690** includes a loop **3694** dimensioned to engage a projection formed on mounting assembly **3650**. The projection is laterally offset from pivot pin **3658** such that linear movement of second articulation link **3690** causes mounting assembly **3650** to pivot about pivot pins **3658** to articulate the carrier **3630**.

[0271] In various forms, axial drive assembly **3680** includes an elongated drive beam **3682** including a distal working head **3684** and a proximal engagement section **3685**. Drive beam **3682** may be constructed from a single sheet of material or, preferably, multiple stacked sheets. Engagement section **3685** includes a pair of engagement fingers which are dimensioned and configured to mountingly engage a pair of corresponding retention slots formed in drive member **3686**. Drive member **3686** includes a proximal porthole **3687** configured to receive the distal end **3722** of control rod **2720** (See FIG. **80**) when the proximal end of disposable loading unit **3614** is engaged with elongated shaft **3700** of surgical tool **3600**.

[0272] Referring to FIGS. **71** and **78-80**, to use the surgical tool **3600**, a disposable loading unit **3612** is first secured to the distal end of elongated shaft **3700**. It will be appreciated that the surgical tool **3600** may include an articulating or a non-articulating disposable loading unit. To secure the disposable loading unit **3612** to the elongated shaft **3700**, the distal end **3722** of control rod **3720** is inserted into insertion tip **3678** of disposable loading unit **3612**, and insertion tip **3678** is slid longitudinally into the distal end of the elongated shaft **3700** in the direction indicated by arrow “A” in FIG. **78** such that hook portion **3692** of second articulation link **3690** slides within a channel **3702** in the elongated shaft **3700**. Nubs **3676** will each be aligned in a respective channel (not shown) in elongated shaft **3700**. When hook portion **3692** engages the proximal wall **3704** of channel **3702**, disposable loading unit **3612** is rotated in the direction indicated by arrow “B” in FIGS. **78** and **80** to move hook portion **3692** of second articulation link **3690** into engagement with finger **3712** of first articulation link **3710**. Nubs **3676** also form a “bayonet-type” coupling within annular channel **3703** in the elongated shaft **3700**. During rotation of loading unit **3612**, nubs **3676** engage cam surface **3732** (FIG. **78**) of block plate **3730** to initially move plate **3730** in the direction indicated by arrow “C” in FIG. **78** to lock engagement member **3734** in recess **3721** of control rod **3720** to prevent longitudinal movement of control rod **3720** during attachment of disposable loading unit **3612**. During the final degree of rotation, nubs **3676** disengage from cam surface **3732** to allow blocking plate **3730** to move in the direction indicated by arrow “D” in FIGS. **77** and **80** from behind engagement member **3734** to once again permit longitudinal movement of control rod **3720**. While the above-described attachment method reflects that the disposable loading unit **3612** is manipulated relative to the elongated shaft **3700**, the person of ordinary skill in the art will appreciate that the disposable loading unit **3612** may be supported

in a stationary position and the robotic system 1000 may manipulate the elongated shaft portion 3700 relative to the disposable loading unit 3612 to accomplish the above-described coupling procedure.

[0273] FIG. 81 illustrates another disposable loading unit 3612' that is attachable in a bayonet-type arrangement with the elongated shaft 3700' that is substantially identical to shaft 3700 except for the differences discussed below. As can be seen in FIG. 81, the elongated shaft 3700' has slots 3705 that extend for at least a portion thereof and which are configured to receive nubs 3676 therein. In various embodiments, the disposable loading unit 3612' includes arms 3677 extending therefrom which, prior to the rotation of disposable loading unit 3612', can be aligned, or at least substantially aligned, with nubs 3676 extending from housing portion 3662. In at least one embodiment, arms 3677 and nubs 3676 can be inserted into slots 3705 in elongated shaft 3700', for example, when disposable loading unit 3612' is inserted into elongated shaft 3700'. When disposable loading unit 3612' is rotated, arms 3677 can be sufficiently confined within slots 3705 such that slots 3705 can hold them in position, whereas nubs 3676 can be positioned such that they are not confined within slots 3705 and can be rotated relative to arms 3677. When rotated, the hook portion 3692 of the articulation link 3690 is engaged with the first articulation link 3710 extending through the elongated shaft 3700'.

[0274] Other methods of coupling the disposable loading units to the end of the elongated shaft may be employed. For example, as shown in FIGS. 82 and 83, disposable loading unit 3612" can include connector portion 3613 which can be configured to be engaged with connector portion 3740 of the elongated shaft 3700". In at least one embodiment, connector portion 3613 can include at least one projection and/or groove which can be mated with at least one projection and/or groove of connector portion 3740. In at least one such embodiment, the connector portions can include co-operating dovetail portions. In various embodiments, the connector portions can be configured to interlock with one another and prevent, or at least inhibit, distal and/or proximal movement of disposable loading unit 3612" along axis 3741. In at least one embodiment, the distal end of the axial drive assembly 3680' can include aperture 3681 which can be configured to receive projection 3721 extending from control rod 3720'. In various embodiments, such an arrangement can allow disposable loading unit 3612" to be assembled to elongated shaft 3700 in a direction which is not collinear with or parallel to axis 3741. Although not illustrated, axial drive assembly 3680' and control rod 3720 can include any other suitable arrangement of projections and apertures to operably connect them to each other. Also in this embodiment, the first articulation link 3710 which can be operably engaged with second articulation link 3690.

[0275] As can be seen in FIGS. 71 and 84, the surgical tool 3600 includes a tool mounting portion 3750. The tool mounting portion 3750 includes a tool mounting plate 3751 that is configured for attachment to the tool drive assembly 1010. The tool mounting portion operably supported a transmission arrangement 3752 thereon. In use, it may be desirable to rotate the disposable loading unit 3612 about the longitudinal tool axis defined by the elongated shaft 3700. In at least one embodiment, the transmission arrangement 3752 includes a rotational transmission assembly 3753 that is configured to receive a corresponding rotary output motion from the tool drive assembly 1010 of the robotic system 1000 and convert

that rotary output motion to a rotary control motion for rotating the elongated shaft 3700 (and the disposable loading unit 3612) about the longitudinal tool axis LT-LT. As can be seen in FIG. 84, a proximal end 3701 of the elongated shaft 3700 is rotatably supported within a cradle arrangement 3754 that is attached to the tool mounting plate 3751 of the tool mounting portion 3750. A rotation gear 3755 is formed on or attached to the proximal end 3701 of the elongated shaft 3700 for meshing engagement with a rotation gear assembly 3756 operably supported on the tool mounting plate 3751. In at least one embodiment, a rotation drive gear 3757 drivingly coupled to a corresponding first one of the driven discs or elements 1304 on the adapter side of the tool mounting plate 3751 when the tool mounting portion 3750 is coupled to the tool drive assembly 1010. The rotation transmission assembly 3753 further comprises a rotary driven gear 3758 that is rotatably supported on the tool mounting plate 3751 in meshing engagement with the rotation gear 3755 and the rotation drive gear 3757. Application of a first rotary output motion from the robotic system 1000 through the tool drive assembly 1010 to the corresponding driven element 1304 will thereby cause rotation of the rotation drive gear 3757 by virtue of being operably coupled thereto. Rotation of the rotation drive gear 3757 ultimately results in the rotation of the elongated shaft 3700 (and the disposable loading unit 3612) about the longitudinal tool axis LT-LT (primary rotary motion).

[0276] As can be seen in FIG. 84, a drive shaft assembly 3760 is coupled to a proximal end of the control rod 2720. In various embodiments, the control rod 2720 is axially advanced in the distal and proximal directions by a knife/closure drive transmission 3762. One form of the knife/closure drive assembly 3762 comprises a rotary drive gear 3763 that is coupled to a corresponding second one of the driven rotatable body portions, discs or elements 1304 on the adapter side of the tool mounting plate 3751 when the tool mounting portion 3750 is coupled to the tool holder 1270. The rotary driven gear 3763 is in meshing driving engagement with a gear train, generally depicted as 3764. In at least one form, the gear train 3764 further comprises a first rotary driven gear assembly 3765 that is rotatably supported on the tool mounting plate 3751. The first rotary driven gear assembly 3765 is in meshing engagement with a second rotary driven gear assembly 3766 that is rotatably supported on the tool mounting plate 3751 and which is in meshing engagement with a third rotary driven gear assembly 3767 that is in meshing engagement with a threaded portion 3768 of the drive shaft assembly 3760. Rotation of the rotary drive gear 3763 in a second rotary direction will result in the axial advancement of the drive shaft assembly 3760 and control rod 2720 in the distal direction "DD". Conversely, rotation of the rotary drive gear 3763 in a secondary rotary direction which is opposite to the second rotary direction will cause the drive shaft assembly 3760 and the control rod 2720 to move in the proximal direction. When the control rod 2720 moves in the distal direction, it drives the drive beam 3682 and the working head 3684 thereof distally through the surgical staple cartridge 3640. As the working head 3684 is driven distally, it operably engages the anvil 3620 to pivot it to a closed position.

[0277] The cartridge carrier 3630 may be selectively articulated about articulation axis AA-AA by applying axial articulation control motions to the first and second articulation links 3710 and 3690. In various embodiments, the transmission arrangement 3752 further includes an articulation drive 3770 that is operably supported on the tool mounting plate 3751.

More specifically and with reference to FIG. 84, it can be seen that a proximal end portion 3772 of an articulation drive shaft 3771 configured to operably engage with the first articulation link 3710 extends through the rotation gear 3755 and is rotatably coupled to a shifter rack gear 3774 that is slidably affixed to the tool mounting plate 3751 through slots 3775. The articulation drive 3770 further comprises a shifter drive gear 3776 that is coupled to a corresponding third one of the driven discs or elements 1304 on the adapter side of the tool mounting plate 3751 when the tool mounting portion 3750 is coupled to the tool holder 1270. The articulation drive assembly 3770 further comprises a shifter driven gear 3778 that is rotatably supported on the tool mounting plate 3751 in meshing engagement with the shifter drive gear 3776 and the shifter rack gear 3774. Application of a third rotary output motion from the robotic system 1000 through the tool drive assembly 1010 to the corresponding driven element 1304 will thereby cause rotation of the shifter drive gear 3776 by virtue of being operably coupled thereto. Rotation of the shifter drive gear 3776 ultimately results in the axial movement of the shifter gear rack 3774 and the articulation drive shaft 3771. The direction of axial travel of the articulation drive shaft 3771 depends upon the direction in which the shifter drive gear 3776 is rotated by the robotic system 1000. Thus, rotation of the shifter drive gear 3776 in a first rotary direction will result in the axial movement of the articulation drive shaft 3771 in the proximal direction "PD" and cause the cartridge carrier 3630 to pivot in a first direction about articulation axis AA-AA. Conversely, rotation of the shifter drive gear 3776 in a second rotary direction (opposite to the first rotary direction) will result in the axial movement of the articulation drive shaft 3771 in the distal direction "DD" to thereby cause the cartridge carrier 3630 to pivot about articulation axis AA-AA in an opposite direction.

[0278] FIG. 85 illustrates yet another surgical tool 3800 embodiment of the present invention that may be employed with a robotic system 1000. As can be seen in FIG. 85, the surgical tool 3800 includes a surgical end effector 3812 in the form of an endocutter 3814 that employs various cable-driven components. Various forms of cable driven endocutters are disclosed, for example, in U.S. Pat. No. 7,726,537, entitled SURGICAL STAPLER WITH UNIVERSAL ARTICULATION AND TISSUE PRE-CLAMP and U.S. Patent Application Publication No. 2008/0308603, entitled CABLE DRIVEN SURGICAL STAPLING AND CUTTING INSTRUMENT WITH IMPROVED CABLE ATTACHMENT ARRANGEMENTS, the disclosures of each are herein incorporated by reference in their respective entireties. Such endocutters 3814 may be referred to as a "disposable loading unit" because they are designed to be disposed of after a single use. However, the various unique and novel arrangements of various embodiments of the present invention may also be employed in connection with cable driven end effectors that are reusable.

[0279] As can be seen in FIG. 85, in at least one form, the endocutter 3814 includes an elongated channel 3822 that operably supports a surgical staple cartridge 3834 therein. An anvil 3824 is pivotally supported for movement relative to the surgical staple cartridge 3834. The anvil 3824 has a cam surface 3825 that is configured for interaction with a pre-clamping collar 3840 that is supported for axial movement relative thereto. The end effector 3814 is coupled to an elongated shaft assembly 3808 that is attached to a tool mounting portion 3900. In various embodiments, a closure cable 3850 is

employed to move pre-clamping collar 3840 distally onto and over cam surface 3825 to close the anvil 3824 relative to the surgical staple cartridge 3834 and compress the tissue therebetween. Preferably, closure cable 3850 attaches to the pre-clamping collar 3840 at or near point 3841 and is fed through a passageway in anvil 3824 (or under a proximal portion of anvil 3824) and fed proximally through shaft 3808. Actuation of closure cable 3850 in the proximal direction "PD" forces pre-clamping collar 3840 distally against cam surface 3825 to close anvil 3824 relative to staple cartridge assembly 3834. A return mechanism, e.g., a spring, cable system or the like (not shown), may be employed to return pre-clamping collar 3840 to a pre-clamping orientation which re-opens the anvil 3824.

[0280] The elongated shaft assembly 3808 may be cylindrical in shape and define a channel 3811 which may be dimensioned to receive a tube adapter 3870. See FIG. 86. In various embodiments, the tube adapter 3870 may be slidably received in friction-fit engagement with the internal channel of elongated shaft 3808. The outer surface of the tube adapter 3870 may further include at least one mechanical interface, e.g., a cutout or notch 3871, oriented to mate with a corresponding mechanical interface, e.g., a radially inwardly extending protrusion or detent (not shown), disposed on the inner periphery of internal channel 3811 to lock the tube adapter 3870 to the elongated shaft 3808. In various embodiments, the distal end of tube adapter 3870 may include a pair of opposing flanges 3872a and 3872b which define a cavity for pivotably receiving a pivot block 3873 therein. Each flange 3872a and 3872b may include an aperture 3874a and 3874b that is oriented to receive a pivot pin 3875 that extends through an aperture in pivot block 3873 to allow pivotable movement of pivot block 3873 about an axis that is perpendicular to longitudinal tool axis "LT-LT". The channel 3822 may be formed with two upwardly extending flanges 3823a, 3823b that have apertures therein, which are dimensioned to receive a pivot pin 3827. In turn, pivot pin 3875 mounts through apertures in pivot block 3873 to permit rotation of the surgical end effector 3814 about the "Y" axis as needed during a given surgical procedure. Rotation of pivot block 3873 about pin 3875 along "Z" axis rotates the surgical end effector 3814 about the "Z" axis. See FIG. 86. Other methods of fastening the elongated channel 3822 to the pivot block 3873 may be effectively employed without departing from the spirit and scope of the present invention.

[0281] The surgical staple cartridge 3834 can be assembled and mounted within the elongated channel 3822 during the manufacturing or assembly process and sold as part of the surgical end effector 3812, or the surgical staple cartridge 3834 may be designed for selective mounting within the elongated channel 3822 as needed and sold separately, e.g., as a single use replacement, replaceable or disposable staple cartridge assembly. It is within the scope of this disclosure that the surgical end effector 3812 may be pivotally, operatively, or integrally attached, for example, to distal end 3809 of the elongated shaft assembly 3808 of a disposable surgical stapler. As is known, a used or spent disposable loading unit 3814 can be removed from the elongated shaft assembly 3808 and replaced with an unused disposable unit. The endocutter 3814 may also preferably include an actuator, preferably a dynamic clamping member 3860, a sled 3862, as well as staple pushers (not shown) and staples (not shown) once an unspent or unused cartridge 3834 is mounted in the elongated channel 3822. See FIG. 86.

[0282] In various embodiments, the dynamic clamping member 3860 is associated with, e.g., mounted on and rides on, or with or is connected to or integral with and/or rides behind sled 3862. It is envisioned that dynamic clamping member 3860 can have cam wedges or cam surfaces attached or integrally formed or be pushed by a leading distal surface thereof. In various embodiments, dynamic clamping member 3860 may include an upper portion 3863 having a transverse aperture 3864 with a pin 3865 mountable or mounted therein, a central support or upward extension 3866 and substantially T-shaped bottom flange 3867 which cooperate to slidably retain dynamic clamping member 3860 along an ideal cutting path during longitudinal, distal movement of sled 3862. The leading cutting edge 3868, here, knife blade 3869, is dimensioned to ride within slot 3835 of staple cartridge assembly 3834 and separate tissue once stapled. As used herein, the term “knife assembly” may include the aforementioned dynamic clamping member 3860, knife 3869, and sled 3862 or other knife/beam/sled drive arrangements and cutting instrument arrangements. In addition, the various embodiments of the present invention may be employed with knife assembly/cutting instrument arrangements that may be entirely supported in the staple cartridge 3834 or partially supported in the staple cartridge 3834 and elongated channel 3822 or entirely supported within the elongated channel 3822.

[0283] In various embodiments, the dynamic clamping member 3860 may be driven in the proximal and distal directions by a cable drive assembly 3870. In one non-limiting form, the cable drive assembly comprises a pair of advance cables 3880, 3882 and a firing cable 3884. FIGS. 87 and 88 illustrate the cables 3880, 3882, 3884 in diagrammatic form. As can be seen in those Figures, a first advance cable 3880 is operably supported on a first distal cable transition support 3885 which may comprise, for example, a pulley, rod, capstan, etc. that is attached to the distal end of the elongated channel 3822 and a first proximal cable transition support 3886 which may comprise, for example, a pulley, rod, capstan, etc. that is operably supported by the elongated channel 3822. A distal end 3881 of the first advance cable 3880 is affixed to the dynamic clamping assembly 3860. The second advance cable 3882 is operably supported on a second distal cable transition support 3887 which may, for example, comprise a pulley, rod, capstan etc. that is mounted to the distal end of the elongated channel 3822 and a second proximal cable transition support 3888 which may, for example, comprise a pulley, rod, capstan, etc. mounted to the proximal end of the elongated channel 3822. The proximal end 3883 of the second advance cable 3882 may be attached to the dynamic clamping assembly 3860. Also in these embodiments, an endless firing cable 3884 is employed and journaled on a support 3889 that may comprise a pulley, rod, capstan, etc. mounted within the elongated shaft 3808. In one embodiment, the retract cable 3884 may be formed in a loop and coupled to a connector 3889 that is fixedly attached to the first and second advance cables 3880, 3882.

[0284] Various non-limiting embodiments of the present invention include a cable drive transmission 3920 that is operably supported on a tool mounting plate 3902 of the tool mounting portion 3900. The tool mounting portion 3900 has an array of electrical connecting pins 3904 which are configured to interface with the slots 1258 (FIG. 27) in the adapter 1240'. Such arrangement permits the robotic system 1000 to provide control signals to a control circuit 3910 of the tool

3800. While the interface is described herein with reference to mechanical, electrical, and magnetic coupling elements, it should be understood that a wide variety of telemetry modalities might be used, including infrared, inductive coupling, or the like.

[0285] Control circuit 3910 is shown in schematic form in FIG. 85. In one form or embodiment, the control circuit 3910 includes a power supply in the form of a battery 3912 that is coupled to an on-off solenoid powered switch 3914. In other embodiments, however, the power supply may comprise a source of alternating current. Control circuit 3910 further includes an on/off solenoid 3916 that is coupled to a double pole switch 3918 for controlling motor rotation direction. Thus, when the robotic system 1000 supplies an appropriate control signal, switch 3914 will permit battery 3912 to supply power to the double pole switch 3918. The robotic system 1000 will also supply an appropriate signal to the double pole switch 3918 to supply power to a shifter motor 3922.

[0286] Turning to FIGS. 89-94, at least one embodiment of the cable drive transmission 3920 comprises a drive pulley 3930 that is operably mounted to a drive shaft 3932 that is attached to a driven element 1304 of the type and construction described above that is designed to interface with a corresponding drive element 1250 of the adapter 1240. See FIGS. 27 and 92. Thus, when the tool mounting portion 3900 is operably coupled to the tool holder 1270, the robot system 1000 can apply rotary motion to the drive pulley 3930 in a desired direction. A first drive member or belt 3934 drivingly engages the drive pulley 3930 and a second drive shaft 3936 that is rotatably supported on a shifter yoke 3940. The shifter yoke 3940 is operably coupled to the shifter motor 3922 such that rotation of the shaft 3923 of the shifter motor 3922 in a first direction will shift the shifter yoke in a first direction “FD” and rotation of the shifter motor shaft 3923 in a second direction will shift the shifter yoke 3940 in a second direction “SD”. Other embodiments of the present invention may employ a shifter solenoid arrangement for shifting the shifter yoke in said first and second directions.

[0287] As can be seen in FIGS. 89-92, a closure drive gear 3950 mounted to a second drive shaft 3936 and is configured to selectively mesh with a closure drive assembly, generally designated as 3951. Likewise a firing drive gear 3960 is also mounted to the second drive shaft 3936 and is configured to selectively mesh with a firing drive assembly generally designated as 3961. Rotation of the second drive shaft 3936 causes the closure drive gear 3950 and the firing drive gear 3960 to rotate. In one non-limiting embodiment, the closure drive assembly 3951 comprises a closure driven gear 3952 that is coupled to a first closure pulley 3954 that is rotatably supported on a third drive shaft 3956. The closure cable 3850 is drivingly received on the first closure pulley 3954 such that rotation of the closure driven gear 3952 will drive the closure cable 3850. Likewise, the firing drive assembly 3961 comprises a firing driven gear 3962 that is coupled to a first firing pulley 3964 that is rotatably supported on the third drive shaft 3956. The first and second driving pulleys 3954 and 3964 are independently rotatable on the third drive shaft 3956. The firing cable 3884 is drivingly received on the first firing pulley 3964 such that rotation of the firing driven gear 3962 will drive the firing cable 3884.

[0288] Also in various embodiments, the cable drive transmission 3920 further includes a braking assembly 3970. In at least one embodiment, for example, the braking assembly 3970 includes a closure brake 3972 that comprises a spring

arm 3973 that is attached to a portion of the transmission housing 3971. The closure brake 3972 has a gear lug 3974 that is sized to engage the teeth of the closure driven gear 3952 as will be discussed in further detail below. The braking assembly 3970 further includes a firing brake 3976 that comprises a spring arm 3977 that is attached to another portion of the transmission housing 3971. The firing brake 3976 has a gear lug 3978 that is sized to engage the teeth of the firing driven gear 3962.

[0289] At least one embodiment of the surgical tool 3800 may be used as follows. The tool mounting portion 3900 is operably coupled to the interface 1240 of the robotic system 1000. The controller or control unit of the robotic system is operated to locate the tissue to be cut and stapled between the open anvil 3824 and the staple cartridge 3834. When in that initial position, the braking assembly 3970 has locked the closure driven gear 3952 and the firing driven gear 3962 such that they cannot rotate. That is, as shown in FIG. 90, the gear lug 3974 is in locking engagement with the closure driven gear 3952 and the gear lug 3978 is in locking engagement with the firing driven gear 3962. Once the surgical end effector 3814 has been properly located, the controller 1001 of the robotic system 1000 will provide a control signal to the shifter motor 3922 (or shifter solenoid) to move the shifter yoke 3940 in the first direction. As the shifter yoke 3940 is moved in the first direction, the closure drive gear 3950 moves the gear lug 3974 out of engagement with the closure driven gear 3952 as it moves into meshing engagement with the closure driven gear 3952. As can be seen in FIG. 89, when in that position, the gear lug 3978 remains in locking engagement with the firing driven gear 3962 to prevent actuation of the firing system. Thereafter, the robotic controller 1001 provides a first rotary actuation motion to the drive pulley 3930 through the interface between the driven element 1304 and the corresponding components of the tool holder 1240. As the drive pulley 3930 is rotated in the first direction, the closure cable 3850 is rotated to drive the preclamping collar 3840 into closing engagement with the cam surface 3825 of the anvil 3824 to move it to the closed position thereby clamping the target tissue between the anvil 3824 and the staple cartridge 3834. See FIG. 85. Once the anvil 3824 has been moved to the closed position, the robotic controller 1001 stops the application of the first rotary motion to the drive pulley 3930. Thereafter, the robotic controller 1001 may commence the firing process by sending another control signal to the shifter motor 3922 (or shifter solenoid) to cause the shifter yoke to move in the second direction “SD” as shown in FIG. 91. As the shifter yoke 3940 is moved in the second direction, the firing drive gear 3960 moves the gear lug 3978 out of engagement with the firing driven gear 3962 as it moves into meshing engagement with the firing driven gear 3962. As can be seen in FIG. 91, when in that position, the gear lug 3974 remains in locking engagement with the closure driven gear 3952 to prevent actuation of the closure system. Thereafter, the robotic controller 1001 is activated to provide the first rotary actuation motion to the drive pulley 3930 through the interface between the driven element 1304 and the corresponding components of the tool holder 1240. As the drive pulley 3930 is rotated in the first direction, the firing cable 3884 is rotated to drive the dynamic clamping member 3860 in the distal direction “DD” thereby firing the staples and cutting the tissue clamped in the end effector 3814. Once the robotic system 1000 determines that the dynamic clamping member 3860 has reached its distal most position—either through sensors

or through monitoring the amount of rotary input applied to the drive pulley 3930, the controller 1001 may then apply a second rotary motion to the drive pulley 3930 to rotate the closure cable 3850 in an opposite direction to cause the dynamic clamping member 3860 to be retracted in the proximal direction “PD”. Once the dynamic clamping member has been retracted to the starting position, the application of the second rotary motion to the drive pulley 3930 is discontinued. Thereafter, the shifter motor 3922 (or shifter solenoid) is powered to move the shifter yoke 3940 to the closure position (FIG. 92). Once the closure drive gear 3950 is in meshing engagement with the closure driven gear 3952, the robotic controller 1001 may once again apply the second rotary motion to the drive pulley 3930. Rotation of the drive pulley 3930 in the second direction causes the closure cable 3850 to retract the preclamping collar 3840 out of engagement with the cam surface 3825 of the anvil 3824 to permit the anvil 3824 to move to an open position (by a spring or other means) to release the stapled tissue from the surgical end effector 3814.

[0290] FIG. 95 illustrates a surgical tool 4000 that employs a gear driven firing bar 4092 as shown in FIGS. 96-98. This embodiment includes an elongated shaft assembly 4008 that extends from a tool mounting portion 4100. The tool mounting portion 4100 includes a tool mounting plate 4102 that operable supports a transmission arrangement 4103 thereon. The elongated shaft assembly 4008 includes a rotatable proximal closure tube 4010 that is rotatably journaled on a proximal spine member 4020 that is rigidly coupled to the tool mounting plate 4102. The proximal spine member 4020 has a distal end that is coupled to an elongated channel portion 4022 of a surgical end effector 4012. The surgical effector 4012 may be substantially similar to surgical end effector 3412 described above. In addition, the anvil 4024 of the surgical end effector 4012 may be opened and closed by a distal closure tube 4030 that operably interfaces with the proximal closure tube 4010. Distal closure tube 4030 is identical to distal closure tube 3430 described above. Similarly, proximal closure tube 4010 is identical to proximal closure tube segment 3410 described above.

[0291] Anvil 4024 is opened and closed by rotating the proximal closure tube 4010 in manner described above with respect to distal closure tube 3410. In at least one embodiment, the transmission arrangement comprises a closure transmission, generally designated as 4011. As will be further discussed below, the closure transmission 4011 is configured to receive a corresponding first rotary motion from the robotic system 1000 and convert that first rotary motion to a primary rotary motion for rotating the rotatable proximal closure tube 4010 about the longitudinal tool axis LT-LT. As can be seen in FIG. 98, a proximal end 4060 of the proximal closure tube 4010 is rotatably supported within a cradle arrangement 4104 that is attached to a tool mounting plate 4102 of the tool mounting portion 4100. A rotation gear 4062 is formed on or attached to the proximal end 4060 of the closure tube segment 4010 for meshing engagement with a rotation drive assembly 4070 that is operably supported on the tool mounting plate 4102. In at least one embodiment, a rotation drive gear 4072 is coupled to a corresponding first one of the driven discs or elements 1304 on the adapter side of the tool mounting plate 4102 when the tool mounting portion 4100 is coupled to the tool holder 1270. See FIGS. 28 and 98. The rotation drive assembly 4070 further comprises a rotary driven gear 4074 that is rotatably supported on the tool mounting plate 4102 in

meshing engagement with the rotation gear **4062** and the rotation drive gear **4072**. Application of a first rotary control motion from the robotic system **1000** through the tool holder **1270** and the adapter **1240** to the corresponding driven element **1304** will thereby cause rotation of the rotation drive gear **4072** by virtue of being operably coupled thereto. Rotation of the rotation drive gear **4072** ultimately results in the rotation of the closure tube segment **4010** to open and close the anvil **4024** as described above.

[0292] As indicated above, the end effector **4012** employs a cutting element **3860** as shown in FIGS. **96** and **97**. In at least one non-limiting embodiment, the transmission arrangement **4103** further comprises a knife drive transmission that includes a knife drive assembly **4080**. FIG. **98** illustrates one form of knife drive assembly **4080** for axially advancing the knife bar **4092** that is attached to such cutting element using cables as described above with respect to surgical tool **3800**. In particular, the knife bar **4092** replaces the firing cable **3884** employed in an embodiment of surgical tool **3800**. One form of the knife drive assembly **4080** comprises a rotary drive gear **4082** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **4102** when the tool mounting portion **4100** is coupled to the tool holder **1270**. See FIGS. **28** and **98**. The knife drive assembly **4080** further comprises a first rotary driven gear assembly **4084** that is rotatably supported on the tool mounting plate **4102**. The first rotary driven gear assembly **4084** is in meshing engagement with a third rotary driven gear assembly **4086** that is rotatably supported on the tool mounting plate **4102** and which is in meshing engagement with a fourth rotary driven gear assembly **4088** that is in meshing engagement with a threaded portion **4094** of drive shaft assembly **4090** that is coupled to the knife bar **4092**. Rotation of the rotary drive gear **4082** in a second rotary direction will result in the axial advancement of the drive shaft assembly **4090** and knife bar **4092** in the distal direction “DD”. Conversely, rotation of the rotary drive gear **4082** in a secondary rotary direction (opposite to the second rotary direction) will cause the drive shaft assembly **4090** and the knife bar **4092** to move in the proximal direction. Movement of the firing bar **4092** in the proximal direction “PD” will drive the cutting element **3860** in the distal direction “DD”. Conversely, movement of the firing bar **4092** in the distal direction “DD” will result in the movement of the cutting element **3860** in the proximal direction “PD”.

[0293] FIGS. **99-105** illustrate yet another surgical tool **5000** that may be effectively employed in connection with a robotic system **1000**. In various forms, the surgical tool **5000** includes a surgical end effector **5012** in the form of a surgical stapling instrument that includes an elongated channel **5020** and a pivotally translatable clamping member, such as an anvil **5070**, which are maintained at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector **5012**. As can be seen in FIG. **101**, the elongated channel **5020** may be substantially U-shaped in cross-section and be fabricated from, for example, titanium, 203 stainless steel, 304 stainless steel, 416 stainless steel, 17-4 stainless steel, 17-7 stainless steel, 6061 or 7075 aluminum, chromium steel, ceramic, etc. A substantially U-shaped metal channel pan **5022** may be supported in the bottom of the elongated channel **5020** as shown.

[0294] Various embodiments include an actuation member in the form of a sled assembly **5030** that is operably supported within the surgical end effector **5012** and axially movable

therein between a starting position and an ending position in response to control motions applied thereto. In some forms, the metal channel pan **5022** has a centrally-disposed slot **5024** therein to movably accommodate a base portion **5032** of the sled assembly **5030**. The base portion **5032** includes a foot portion **5034** that is sized to be slidably received in a slot **5021** in the elongated channel **5020**. See FIG. **101**. As can be seen in FIGS. **100**, **101**, **104**, and **105**, the base portion **5032** of sled assembly **5030** includes an axially extending threaded bore **5036** that is configured to be threadedly received on a threaded drive shaft **5130** as will be discussed in further detail below. In addition, the sled assembly **5030** includes an upstanding support portion **5038** that supports a tissue cutting blade or tissue cutting instrument **5040**. The upstanding support portion **5038** terminates in a top portion **5042** that has a pair of laterally extending retaining fins **5044** protruding therefrom. As shown in FIG. **101**, the fins **5044** are positioned to be received within corresponding slots **5072** in anvil **5070**. The fins **5044** and the foot **5034** serve to retain the anvil **5070** in a desired spaced closed position as the sled assembly **5030** is driven distally through the tissue clamped within the surgical end effector **5014**. As can also be seen in FIGS. **103** and **105**, the sled assembly **5030** further includes a reciprocatably or sequentially activatable drive assembly **5050** for driving staple pushers toward the closed anvil **5070**.

[0295] More specifically and with reference to FIGS. **101** and **102**, the elongated channel **5020** is configured to operably support a surgical staple cartridge **5080** therein. In at least one form, the surgical staple cartridge **5080** comprises a body portion **5082** that may be fabricated from, for example, Vectra, Nylon (6/6 or 6/12) and include a centrally disposed slot **5084** for accommodating the upstanding support portion **5038** of the sled assembly **5030**. See FIG. **101**. These materials could also be filled with glass, carbon, or mineral fill of 10%-40%. The surgical staple cartridge **5080** further includes a plurality of cavities **5086** for movably supporting lines or rows of staple-supporting pushers **5088** therein. The cavities **5086** may be arranged in spaced longitudinally extending lines or rows **5090**, **5092**, **5094**, **5096**. For example, the rows **5090** may be referred to herein as first outboard rows. The rows **5092** may be referred to herein as first inboard rows. The rows **5094** may be referred to as second inboard rows and the rows **5096** may be referred to as second outboard rows. The first inboard row **5090** and the first outboard row **5092** are located on a first lateral side of the longitudinal slot **5084** and the second inboard row **5094** and the second outboard row **5096** are located on a second lateral side of the longitudinal slot **5084**. The first staple pushers **5088** in the first inboard row **5092** are staggered in relationship to the first staple pushers **5088** in the first outboard row **5090**. Similarly, the second staple pushers **5088** in the second outboard row **5096** are staggered in relationship to the second pushers **5088** in the second inboard row **5094**. Each pusher **5088** operably supports a surgical staple **5098** thereon.

[0296] In various embodiments, the sequentially-activatable or reciprocatably-activatable drive assembly **5050** includes a pair of outboard drivers **5052** and a pair of inboard drivers **5054** that are each attached to a common shaft **5056** that is rotatably mounted within the base **5032** of the sled assembly **5030**. The outboard drivers **5052** are oriented to sequentially or reciprocatingly engage a corresponding plurality of outboard activation cavities **5026** provided in the channel pan **5022**. Likewise, the inboard drivers **5054** are oriented to sequentially or reciprocatingly engage a corre-

sponding plurality of inboard activation cavities **5028** provided in the channel pan **5022**. The inboard activation cavities **5028** are arranged in a staggered relationship relative to the adjacent outboard activation cavities **5026**. See FIG. 102. As can also be seen in FIGS. 103 and 104, in at least one embodiment, the sled assembly **5030** further includes distal wedge segments **5060** and intermediate wedge segments **5062** located on each side of the bore **5036** to engage the pushers **5088** as the sled assembly **5030** is driven distally in the distal direction “DD”. As indicated above, the sled assembly **5030** is threadably received on a threaded portion **5132** of a drive shaft **5130** that is rotatably supported within the end effector **5012**. In various embodiments, for example, the drive shaft **5130** has a distal end **5134** that is supported in a distal bearing **5136** mounted in the surgical end effector **5012**. See FIGS. 101 and 102.

[0297] In various embodiments, the surgical end effector **5012** is coupled to a tool mounting portion **5200** by an elongated shaft assembly **5108**. In at least one embodiment, the tool mounting portion **5200** operably supports a transmission arrangement generally designated as **5204** that is configured to receive rotary output motions from the robotic system. The elongated shaft assembly **5108** includes an outer closure tube **5110** that is rotatable and axially movable on a spine member **5120** that is rigidly coupled to a tool mounting plate **5201** of the tool mounting portion **5200**. The spine member **5120** also has a distal end **5122** that is coupled to the elongated channel portion **5020** of the surgical end effector **5012**.

[0298] In use, it may be desirable to rotate the surgical end effector **5012** about a longitudinal tool axis LT-LT defined by the elongated shaft assembly **5008**. In various embodiments, the outer closure tube **5110** has a proximal end **5112** that is rotatably supported on the tool mounting plate **5201** of the tool drive portion **5200** by a forward support cradle **5203**. The proximal end **5112** of the outer closure tube **5110** is configured to operably interface with a rotation transmission portion **5206** of the transmission arrangement **5204**. In various embodiments, the proximal end **5112** of the outer closure tube **5110** is also supported on a closure sled **5140** that is also movably supported on the tool mounting plate **5201**. A closure tube gear segment **5114** is formed on the proximal end **5112** of the outer closure tube **5110** for meshing engagement with a rotation drive assembly **5150** of the rotation transmission **5206**. As can be seen in FIG. 99, the rotation drive assembly **5150**, in at least one embodiment, comprises a rotation drive gear **5152** that is coupled to a corresponding first one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **5201** when the tool drive portion **5200** is coupled to the tool holder **1270**. The rotation drive assembly **5150** further comprises a rotary driven gear **5154** that is rotatably supported on the tool mounting plate **5201** in meshing engagement with the closure tube gear segment **5114** and the rotation drive gear **5152**. Application of a first rotary control motion from the robotic system **1000** through the tool holder **1270** and the adapter **1240** to the corresponding driven element **1304** will thereby cause rotation of the rotation drive gear **5152**. Rotation of the rotation drive gear **5152** ultimately results in the rotation of the elongated shaft assembly **5108** (and the end effector **5012**) about the longitudinal tool axis LT-LT (represented by arrow “R” in FIG. 99).

[0299] Closure of the anvil **5070** relative to the surgical staple cartridge **5080** is accomplished by axially moving the outer closure tube **5110** in the distal direction “DD”. Such

axial movement of the outer closure tube **5110** may be accomplished by a closure transmission portion closure transmission portion **5144** of the transmission arrangement **5204**. As indicated above, in various embodiments, the proximal end **5112** of the outer closure tube **5110** is supported by the closure sled **5140** which enables the proximal end **5112** to rotate relative thereto, yet travel axially with the closure sled **5140**. In particular, as can be seen in FIG. 99, the closure sled **5140** has an upstanding tab **5141** that extends into a radial groove **5115** in the proximal end portion **5112** of the outer closure tube **5110**. In addition, as was described above, the closure sled **5140** is slidably mounted to the tool mounting plate **5201**. In various embodiments, the closure sled **5140** has an upstanding portion **5142** that has a closure rack gear **5143** formed thereon. The closure rack gear **5143** is configured for driving engagement with the closure transmission **5144**.

[0300] In various forms, the closure transmission **5144** includes a closure spur gear **5145** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **5201**. Thus, application of a second rotary control motion from the robotic system **1000** through the tool holder **1270** and the adapter **1240** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **5145** when the interface **1230** is coupled to the tool mounting portion **5200**. The closure transmission **5144** further includes a driven closure gear set **5146** that is supported in meshing engagement with the closure spur gear **5145** and the closure rack gear **5143**. Thus, application of a second rotary control motion from the robotic system **1000** through the tool holder **1270** and the adapter **1240** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **5145** and ultimately drive the closure sled **5140** and the outer closure tube **5110** axially. The axial direction in which the closure tube **5110** moves ultimately depends upon the direction in which the second driven element **1304** is rotated. For example, in response to one rotary closure motion received from the robotic system **1000**, the closure sled **5140** will be driven in the distal direction “DD” and ultimately the outer closure tube **5110** will be driven in the distal direction as well. The outer closure tube **5110** has an opening **5117** in the distal end **5116** that is configured for engagement with a tab **5071** on the anvil **5070** in the manners described above. As the outer closure tube **5110** is driven distally, the proximal end **5116** of the closure tube **5110** will contact the anvil **5070** and pivot it closed. Upon application of an “opening” rotary motion from the robotic system **1000**, the closure sled **5140** and outer closure tube **5110** will be driven in the proximal direction “PD” and pivot the anvil **5070** to the open position in the manners described above.

[0301] In at least one embodiment, the drive shaft **5130** has a proximal end **5137** that has a proximal shaft gear **5138** attached thereto. The proximal shaft gear **5138** is supported in meshing engagement with a distal drive gear **5162** attached to a rotary drive bar **5160** that is rotatably supported with spine member **5120**. Rotation of the rotary drive bar **5160** and ultimately rotary drive shaft **5130** is controlled by a rotary knife transmission **5207** which comprises a portion of the transmission arrangement **5204** supported on the tool mounting plate **5210**. In various embodiments, the rotary knife transmission **5207** comprises a rotary knife drive system **5170** that is operably supported on the tool mounting plate **5201**. In various embodiments, the knife drive system **5170** includes a rotary drive gear **5172** that is coupled to a corresponding third

one of the driven discs or elements **1304** on the adapter side of the tool mounting plate **5201** when the tool drive portion **5200** is coupled to the tool holder **1270**. The knife drive system **5170** further comprises a first rotary driven gear **5174** that is rotatably supported on the tool mounting plate **5201** in meshing engagement with a second rotary driven gear **5176** and the rotary drive gear **5172**. The second rotary driven gear **5176** is coupled to a proximal end portion **5164** of the rotary drive bar **5160**.

[0302] Rotation of the rotary drive gear **5172** in a first rotary direction will result in the rotation of the rotary drive bar **5160** and rotary drive shaft **5130** in a first direction. Conversely, rotation of the rotary drive gear **5172** in a second rotary direction (opposite to the first rotary direction) will cause the rotary drive bar **5160** and rotary drive shaft **5130** to rotate in a second direction. **2400**. Thus, rotation of the drive shaft **2440** results in rotation of the drive sleeve **2400**.

[0303] One method of operating the surgical tool **5000** will now be described. The tool drive **5200** is operably coupled to the interface **1240** of the robotic system **1000**. The controller **1001** of the robotic system **1000** is operated to locate the tissue to be cut and stapled between the open anvil **5070** and the surgical staple cartridge **5080**. Once the surgical end effector **5012** has been positioned by the robot system **1000** such that the target tissue is located between the anvil **5070** and the surgical staple cartridge **5080**, the controller **1001** of the robotic system **1000** may be activated to apply the second rotary output motion to the second driven element **1304** coupled to the closure spur gear **5145** to drive the closure sled **5140** and the outer closure tube **5110** axially in the distal direction to pivot the anvil **5070** closed in the manner described above. Once the robotic controller **1001** determines that the anvil **5070** has been closed by, for example, sensors in the surgical end effector **5012** and/or the tool drive portion **5200**, the robotic controller **1001** system may provide the surgeon with an indication that signifies the closure of the anvil. Such indication may be, for example, in the form of a light and/or audible sound, tactile feedback on the control members, etc. Then the surgeon may initiate the firing process. In alternative embodiments, however, the robotic controller **1001** may automatically commence the firing process.

[0304] To commence the firing process, the robotic controller applies a third rotary output motion to the third driven disc or element **1304** coupled to the rotary drive gear **5172**. Rotation of the rotary drive gear **5172** results in the rotation of the rotary drive bar **5160** and rotary drive shaft **5130** in the manner described above. Firing and formation of the surgical staples **5098** can be best understood from reference to FIGS. **103**, **105**, and **106**. As the sled assembly **5030** is driven in the distal direction “DD” through the surgical staple cartridge **5080**, the distal wedge segments **5060** first contact the staple pushers **5088** and start to move them toward the closed anvil **5070**. As the sled assembly **5030** continues to move distally, the outboard drivers **5052** will drop into the corresponding activation cavity **5026** in the channel pan **5022**. The opposite end of each outboard driver **5052** will then contact the corresponding outboard pusher **5088** that has moved up the distal and intermediate wedge segments **5060**, **5062**. Further distal movement of the sled assembly **5030** causes the outboard drivers **5052** to rotate and drive the corresponding pushers **5088** toward the anvil **5070** to cause the staples **5098** supported thereon to be formed as they are driven into the anvil **5070**. It will be understood that as the sled assembly **5030** moves distally, the knife blade **5040** cuts through the tissue

that is clamped between the anvil and the staple cartridge. Because the inboard drivers **5054** and outboard drivers **5052** are attached to the same shaft **5056** and the inboard drivers **5054** are radially offset from the outboard drivers **5052** on the shaft **5056**, as the outboard drivers **5052** are driving their corresponding pushers **5088** toward the anvil **5070**, the inboard drivers **5054** drop into their next corresponding activation cavity **5028** to cause them to rotatably or reciprocatingly drive the corresponding inboard pushers **5088** towards the closed anvil **5070** in the same manner. Thus, the laterally corresponding outboard staples **5098** on each side of the centrally disposed slot **5084** are simultaneously formed together and the laterally corresponding inboard staples **5098** on each side of the slot **5084** are simultaneously formed together as the sled assembly **5030** is driven distally. Once the robotic controller **1001** determines that the sled assembly **5030** has reached its distal most position—either through sensors or through monitoring the amount of rotary input applied to the drive shaft **5130** and/or the rotary drive bar **5160**, the controller **1001** may then apply a third rotary output motion to the drive shaft **5130** to rotate the drive shaft **5130** in an opposite direction to retract the sled assembly **5030** back to its starting position. Once the sled assembly **5030** has been retracted to the starting position (as signaled by sensors in the end effector **5012** and/or the tool drive portion **5200**), the application of the second rotary motion to the drive shaft **5130** is discontinued. Thereafter, the surgeon may manually activate the anvil opening process or it may be automatically commenced by the robotic controller **1001**. To open the anvil **5070**, the second rotary output motion is applied to the closure spur gear **5145** to drive the closure sled **5140** and the outer closure tube **5110** axially in the proximal direction. As the closure tube **5110** moves proximally, the opening **5117** in the distal end **5116** of the closure tube **5110** contacts the tab **5071** on the anvil **5070** to pivot the anvil **5070** to the open position. A spring may also be employed to bias the anvil **5070** to the open position when the closure tube **5116** has been returned to the starting position. Again, sensors in the surgical end effector **5012** and/or the tool mounting portion **5200** may provide the robotic controller **1001** with a signal indicating that the anvil **5070** is now open. Thereafter, the surgical end effector **5012** may be withdrawn from the surgical site.

[0305] FIGS. **106-111** diagrammatically depict the sequential firing of staples in a surgical tool assembly **5000'** that is substantially similar to the surgical tool assembly **5000** described above. In this embodiment, the inboard and outboard drivers **5052'**, **5054'** have a cam-like shape with a cam surface **5053** and an actuator protrusion **5055** as shown in FIGS. **106-112**. The drivers **5052'**, **5054'** are journaled on the same shaft **5056'** that is rotatably supported by the sled assembly **5030'**. In this embodiment, the sled assembly **5030'** has distal wedge segments **5060'** for engaging the pushers **5088**. FIG. **106** illustrates an initial position of two inboard or outboard drivers **5052'**, **5054'** as the sled assembly **5030'** is driven in the distal direction “DD”. As can be seen in that Figure, the pusher **5088a** has advanced up the wedge segment **5060'** and has contacted the driver **5052'**, **5054'**. Further travel of the sled assembly **5030'** in the distal direction causes the driver **5052'**, **5054'** to pivot in the “P” direction (FIG. **107**) until the actuator portion **5055** contacts the end wall **5029a** of the activation cavity **5026**, **5028** as shown in FIG. **108**. Continued advancement of the sled assembly **5030'** in the distal direction “DD” causes the driver **5052'**, **5054'** to rotate in the

“D” direction as shown in FIG. 109. As the driver 5052', 5054' rotates, the pusher 5088a rides up the cam surface 5053 to the final vertical position shown in FIG. 110. When the pusher 5088a reaches the final vertical position shown in FIGS. 110 and 111, the staple (not shown) supported thereon has been driven into the staple forming surface of the anvil to form the staple.

[0306] FIGS. 113-119 illustrate a surgical end effector 5312 that may be employed for example, in connection with the tool mounting portion 1300 and shaft 2008 described in detail above. In various forms, the surgical end effector 5312 includes an elongated channel 5322 that is constructed as described above for supporting a surgical staple cartridge 5330 therein. The surgical staple cartridge 5330 comprises a body portion 5332 that includes a centrally disposed slot 5334 for accommodating an upstanding support portion 5386 of a sled assembly 5380. See FIGS. 113-115. The surgical staple cartridge body portion 5332 further includes a plurality of cavities 5336 for movably supporting staple-supporting pushers 5350 therein. The cavities 5336 may be arranged in spaced longitudinally extending rows 5340, 5342, 5344, 5346. The rows 5340, 5342 are located on one lateral side of the longitudinal slot 5334 and the rows 5344, 5346 are located on the other side of longitudinal slot 5334. In at least one embodiment, the pushers 5350 are configured to support two surgical staples 5352 thereon. In particular, each pusher 5350 located on one side of the elongated slot 5334 supports one staple 5352 in row 5340 and one staple 5352 in row 5342 in a staggered orientation. Likewise, each pusher 5350 located on the other side of the elongated slot 5334 supports one surgical staple 5352 in row 5344 and another surgical staple 5352 in row 5346 in a staggered orientation. Thus, every pusher 5350 supports two surgical staples 5352.

[0307] As can be further seen in FIGS. 113, 114, the surgical staple cartridge 5330 includes a plurality of rotary drivers 5360. More particularly, the rotary drivers 5360 on one side of the elongated slot 5334 are arranged in a single line 5370 and correspond to the pushers 5350 in lines 5340, 5342. In addition, the rotary drivers 5360 on the other side of the elongated slot 5334 are arranged in a single line 5372 and correspond to the pushers 5350 in lines 5344, 5346. As can be seen in FIG. 113, each rotary driver 5360 is rotatably supported within the staple cartridge body 5332. More particularly, each rotary driver 5360 is rotatably received on a corresponding driver shaft 5362. Each driver 5360 has an arcuate ramp portion 5364 formed thereon that is configured to engage an arcuate lower surface 5354 formed on each pusher 5350. See FIG. 118. In addition, each driver 5360 has a lower support portion 5366 extend therefrom to slidably support the pusher 5360 on the channel 5322. Each driver 5360 has a downwardly extending actuation rod 5368 that is configured for engagement with a sled assembly 5380.

[0308] As can be seen in FIG. 115, in at least one embodiment, the sled assembly 5380 includes a base portion 5382 that has a foot portion 5384 that is sized to be slidably received in a slot 5333 in the channel 5322. See FIG. 113. The sled assembly 5380 includes an upstanding support portion 5386 that supports a tissue cutting blade or tissue cutting instrument 5388. The upstanding support portion 5386 terminates in a top portion 5390 that has a pair of laterally extending retaining fins 5392 protruding therefrom. The fins 5392 are positioned to be received within corresponding slots (not shown) in the anvil (not shown). As with the above-described embodiments, the fins 5392 and the foot portion

5384 serve to retain the anvil (not shown) in a desired spaced closed position as the sled assembly 5380 is driven distally through the tissue clamped within the surgical end effector 5312. The upstanding support portion 5386 is configured for attachment to a knife bar 2200 (FIG. 34). The sled assembly 5380 further has a horizontally-extending actuator plate 5394 that is shaped for actuating engagement with each of the actuation rods 5368 on the pushers 5360.

[0309] Operation of the surgical end effector 5312 will now be explained with reference to FIGS. 113 and 114. As the sled assembly 5380 is driven in the distal direction “DD” through the staple cartridge 5330, the actuator plate 5394 sequentially contacts the actuation rods 5368 on the pushers 5360. As the sled assembly 5380 continues to move distally, the actuator plate 5394 sequentially contacts the actuator rods 5368 of the drivers 5360 on each side of the elongated slot 5334. Such action causes the drivers 5360 to rotate from a first unactuated position to an actuated position wherein the pushers 5350 are driven towards the closed anvil. As the pushers 5350 are driven toward the anvil, the surgical staples 5352 thereon are driven into forming contact with the underside of the anvil. Once the robotic system 1000 determines that the sled assembly 5080 has reached its distal most position through sensors or other means, the control system of the robotic system 1000 may then retract the knife bar and sled assembly 5380 back to the starting position. Thereafter, the robotic control system may then activate the procedure for returning the anvil to the open position to release the stapled tissue.

[0310] FIGS. 119-123 depict one form of an automated reloading system embodiment of the present invention, generally designated as 5500. In one form, the automated reloading system 5500 is configured to replace a “spent” surgical end effector component in a manipulatable surgical tool portion of a robotic surgical system with a “new” surgical end effector component. As used herein, the term “surgical end effector component” may comprise, for example, a surgical staple cartridge, a disposable loading unit or other end effector components that, when used, are spent and must be replaced with a new component. Furthermore, the term “spent” means that the end effector component has been activated and is no longer useable for its intended purpose in its present state. For example, in the context of a surgical staple cartridge or disposable loading unit, the term “spent” means that at least some of the unformed staples that were previously supported therein have been “fired” therefrom. As used herein, the term “new” surgical end effector component refers to an end effector component that is in condition for its intended use. In the context of a surgical staple cartridge or disposable loading unit, for example, the term “new” refers to such a component that has unformed staples therein and which is otherwise ready for use.

[0311] In various embodiments, the automated reloading system 5500 includes a base portion 5502 that may be strategically located within a work envelope 1109 of a robotic arm cart 1100 (FIG. 20) of a robotic system 1000. As used herein, the term “manipulatable surgical tool portion” collectively refers to a surgical tool of the various types disclosed herein and other forms of surgical robotically-actuated tools that are operably attached to, for example, a robotic arm cart 1100 or similar device that is configured to automatically manipulate and actuate the surgical tool. The term “work envelope” as used herein refers to the range of movement of the manipulatable surgical tool portion of the robotic system. FIG. 20 generally depicts an area that may comprise a work

envelope of the robotic arm cart **1100**. Those of ordinary skill in the art will understand that the shape and size of the work envelope depicted therein is merely illustrative. The ultimate size, shape and location of a work envelope will ultimately depend upon the construction, range of travel limitations, and location of the manipulatable surgical tool portion. Thus, the term “work envelope” as used herein is intended to cover a variety of different sizes and shapes of work envelopes and should not be limited to the specific size and shape of the sample work envelope depicted in FIG. 20.

[0312] As can be seen in FIG. 119, the base portion **5502** includes a new component support section or arrangement **5510** that is configured to operably support at least one new surgical end effector component in a “loading orientation”. As used herein, the term “loading orientation” means that the new end effector component is supported in such away so as to permit the corresponding component support portion of the manipulatable surgical tool portion to be brought into loading engagement with (i.e., operably seated or operably attached to) the new end effector component (or the new end effector component to be brought into loading engagement with the corresponding component support portion of the manipulatable surgical tool portion) without human intervention beyond that which may be necessary to actuate the robotic system. As will be further appreciated as the present Detailed Description proceeds, in at least one embodiment, the preparation nurse will load the new component support section before the surgery with the appropriate length and color cartridges (some surgical staple cartridges may support certain sizes of staples the size of which may be indicated by the color of the cartridge body) required for completing the surgical procedure. However, no direct human interaction is necessary during the surgery to reload the robotic endocutter. In one form, the surgical end effector component comprises a staple cartridge **2034** that is configured to be operably seated within a component support portion (elongated channel) of any of the various other end effector arrangements described above. For explanation purposes, new (unused) cartridges will be designated as “**2034a**” and spent cartridges will be designated as “**2034b**”. The Figures depict cartridges **2034a**, **2034b** designed for use with a surgical end effector **2012** that includes a channel **2022** and an anvil **2024**, the construction and operation of which were discussed in detail above. Cartridges **2034a**, **2034b** are identical to cartridges **2034** described above. In various embodiments, the cartridges **2034a**, **2034b** are configured to be snappingly retained (i.e., loading engagement) within the channel **2022** of a surgical end effector **2012**. As the present Detailed Description proceeds, however, those of ordinary skill in the art will appreciate that the unique and novel features of the automated cartridge reloading system **5500** may be effectively employed in connection with the automated removal and installation of other cartridge arrangements without departing from the spirit and scope of the present invention.

[0313] In the depicted embodiment, the term “loading orientation” means that the distal tip portion **2035a** of the new surgical staple cartridge **2034a** is inserted into a corresponding support cavity **5512** in the new cartridge support section **5510** such that the proximal end portion **2037a** of the new surgical staple cartridge **2034a** is located in a convenient orientation for enabling the arm cart **1100** to manipulate the surgical end effector **2012** into a position wherein the new cartridge **2034a** may be automatically loaded into the channel **2022** of the surgical end effector **2012**. In various embodi-

ments, the base **5502** includes at least one sensor **5504** which communicates with the control system **1003** of the robotic controller **1001** to provide the control system **1003** with the location of the base **5502** and/or the reload length and color of each staged or new cartridge **2034a**.

[0314] As can also be seen in the Figures, the base **5502** further includes a collection receptacle **5520** that is configured to collect spent cartridges **2034b** that have been removed or disengaged from the surgical end effector **2012** that is operably attached to the robotic system **1000**. In addition, in one form, the automated reloading system **5500** includes an extraction system **5530** for automatically removing the spent end effector component from the corresponding support portion of the end effector or manipulatable surgical tool portion without specific human intervention beyond that which may be necessary to activate the robotic system. In various embodiments, the extraction system **5530** includes an extraction hook member **5532**. In one form, for example, the extraction hook member **5532** is rigidly supported on the base portion **5502**. In one embodiment, the extraction hook member has at least one hook **5534** formed thereon that is configured to hookingly engage the distal end **2035** of a spent cartridge **2034b** when it is supported in the elongated channel **2022** of the surgical end effector **2012**. In various forms, the extraction hook member **5532** is conveniently located within a portion of the collection receptacle **5520** such that when the spent end effector component (cartridge **2034b**) is brought into extractive engagement with the extraction hook member **5532**, the spent end effector component (cartridge **2034b**) is dislodged from the corresponding component support portion (elongated channel **2022**), and falls into the collection receptacle **5520**. Thus, to use this embodiment, the manipulatable surgical tool portion manipulates the end effector attached thereto to bring the distal end **2035** of the spent cartridge **2034b** therein into hooking engagement with the hook **5534** and then moves the end effector in such a way to dislodge the spent cartridge **2034b** from the elongated channel **2022**.

[0315] In other arrangements, the extraction hook member **5532** comprises a rotatable wheel configuration that has a pair of diametrically-opposed hooks **5534** protruding therefrom. See FIGS. 119 and 123. The extraction hook member **5532** is rotatably supported within the collection receptacle **5520** and is coupled to an extraction motor **5540** that is controlled by the controller **1001** of the robotic system. This form of the automated reloading system **5500** may be used as follows. FIG. 121 illustrates the introduction of the surgical end effector **2012** that is operably attached to the manipulatable surgical tool portion **1200**. As can be seen in that Figure, the arm cart **1100** of the robotic system **1000** locates the surgical end effector **2012** in the shown position wherein the hook end **5534** of the extraction member **5532** hookingly engages the distal end **2035** of the spent cartridge **2034b** in the surgical end effector **2012**. The anvil **2024** of the surgical end effector **2012** is in the open position. After the distal end **2035** of the spent cartridge **2034b** is engaged with the hook end **5532**, the extraction motor **5540** is actuated to rotate the extraction wheel **5532** to disengage the spent cartridge **2034b** from the channel **2022**. To assist with the disengagement of the spent cartridge **2034b** from the channel **2022** (or if the extraction member **5530** is stationary), the robotic system **1000** may move the surgical end effector **2012** in an upward direction (arrow “U” in FIG. 137). As the spent cartridge **2034b** is dislodged from the channel **2022**, the spent cartridge **2034b**

falls into the collection receptacle **5520**. Once the spent cartridge **2034b** has been removed from the surgical end effector **2012**, the robotic system **1000** moves the surgical end effector **2012** to the position shown in FIG. **123**.

[**0316**] In various embodiments, a sensor arrangement **5533** is located adjacent to the extraction member **5532** that is in communication with the controller **1001** of the robotic system **1000**. The sensor arrangement **5533** may comprise a sensor that is configured to sense the presence of the surgical end effector **2012** and, more particularly the tip **2035b** of the spent surgical staple cartridge **2034b** thereof as the distal tip portion **2035b** is brought into engagement with the extraction member **5532**. In some embodiments, the sensor arrangement **5533** may comprise, for example, a light curtain arrangement. However, other forms of proximity sensors may be employed. In such arrangement, when the surgical end effector **2012** with the spent surgical staple cartridge **2034b** is brought into extractive engagement with the extraction member **5532**, the sensor senses the distal tip **2035b** of the surgical staple cartridge **2034b** (e.g., the light curtain is broken). When the extraction member **5532** spins and pops the surgical staple cartridge **2034b** loose and it falls into the collection receptacle **5520**, the light curtain is again unbroken. Because the surgical end effector **2012** was not moved during this procedure, the robotic controller **1001** is assured that the spent surgical staple cartridge **2034b** has been removed therefrom. Other sensor arrangements may also be successfully employed to provide the robotic controller **1001** with an indication that the spent surgical staple cartridge **2034b** has been removed from the surgical end effector **2012**.

[**0317**] As can be seen in FIG. **123**, the surgical end effector **2012** is positioned to grasp a new surgical staple cartridge **2034a** between the channel **2022** and the anvil **2024**. More specifically, as shown in FIGS. **120** and **123**, each cavity **5512** has a corresponding upstanding pressure pad **5514** associated with it. The surgical end effector **2012** is located such that the pressure pad **5514** is located between the new cartridge **2034a** and the anvil **2024**. Once in that position, the robotic system **1000** closes the anvil **2024** onto the pressure pad **5514** which serves to push the new cartridge **2034a** into snapping engagement with the channel **2022** of the surgical end effector **2012**. Once the new cartridge **2034a** has been snapped into position within the elongated channel **2022**, the robotic system **1000** then withdraws the surgical end effector **2012** from the automated cartridge reloading system **5500** for use in connection with performing another surgical procedure.

[**0318**] FIGS. **124-128** depict another automated reloading system **5600** that may be used to remove a spent disposable loading unit **3612** from a manipulatable surgical tool arrangement **3600** (FIGS. **71-84**) that is operably attached to an arm cart **1100** or other portion of a robotic system **1000** and reload a new disposable loading unit **3612** therein. As can be seen in FIGS. **124** and **125**, one form of the automated reloading system **5600** includes a housing **5610** that has a movable support assembly in the form of a rotary carousel top plate **5620** supported thereon which cooperates with the housing **5610** to form a hollow enclosed area **5612**. The automated reloading system **5600** is configured to be operably supported within the work envelop of the manipulatable surgical tool portion of a robotic system as was described above. In various embodiments, the rotary carousel plate **5620** has a plurality of holes **5622** for supporting a plurality of orientation tubes **5660** therein. As can be seen in FIGS. **125** and **126**, the rotary carousel plate **5620** is affixed to a spindle shaft **5624**. The

spindle shaft **5624** is centrally disposed within the enclosed area **5612** and has a spindle gear **5626** attached thereto. The spindle gear **5626** is in meshing engagement with a carousel drive gear **5628** that is coupled to a carousel drive motor **5630** that is in operative communication with the robotic controller **1001** of the robotic system **1000**.

[**0319**] Various embodiments of the automated reloading system **5600** may also include a carousel locking assembly, generally designated as **5640**. In various forms, the carousel locking assembly **5640** includes a cam disc **5642** that is affixed to the spindle shaft **5624**. The spindle gear **5626** may be attached to the underside of the cam disc **5642** and the cam disc **5642** may be keyed onto the spindle shaft **5624**. In alternative arrangements, the spindle gear **5626** and the cam disc **5642** may be independently non-rotatably affixed to the spindle shaft **5624**. As can be seen in FIGS. **125** and **126**, a plurality of notches **5644** are spaced around the perimeter of the cam disc **5642**. A locking arm **5648** is pivotally mounted within the housing **5610** and is biased into engagement with the perimeter of the cam disc **5642** by a locking spring **5649**. As can be seen in FIG. **127**, the outer perimeter of the cam disc **5642** is rounded to facilitate rotation of the cam disc **5642** relative to the locking arm **5648**. The edges of each notch **5644** are also rounded such that when the cam disc **5642** is rotated, the locking arm **5648** is cammed out of engagement with the notches **5644** by the perimeter of the cam disc **5642**.

[**0320**] Various forms of the automated reloading system **5600** are configured to support a portable/replaceable tray assembly **5650** that is configured to support a plurality of disposable loading units **3612** in individual orientation tubes **5660**. More specifically and with reference to FIGS. **125** and **126**, the replaceable tray assembly **5650** comprises a tray **5652** that has a centrally-disposed locator spindle **5654** protruding from the underside thereof. The locator spindle **5654** is sized to be received within a hollow end **5625** of spindle shaft **5624**. The tray **5652** has a plurality of holes **5656** therein that are configured to support an orientation tube **5660** therein. Each orientation tube **5660** is oriented within a corresponding hole **5656** in the replaceable tray assembly **5650** in a desired orientation by a locating fin **5666** on the orientation tube **5660** that is designed to be received within a corresponding locating slot **5658** in the tray assembly **5650**. In at least one embodiment, the locating fin **5666** has a substantially V-shaped cross-sectional shape that is sized to fit within a V-shaped locating slot **5658**. Such arrangement serves to orient the orientation tube **5660** in a desired starting position while enabling it to rotate within the hole **5656** when a rotary motion is applied thereto. That is, when a rotary motion is applied to the orientation tube **5660** the V-shaped locating fin **5666** will pop out of its corresponding locating slot enabling the tube **5660** to rotate relative to the tray **5652** as will be discussed in further detail below. As can also be seen in FIGS. **124-126**, the replaceable tray **5652** may be provided with one or more handle portions **5653** to facilitate transport of the tray assembly **5652** when loaded with orientation tubes **5660**.

[**0321**] As can be seen in FIG. **128**, each orientation tube **5660** comprises a body portion **5662** that has a flanged open end **5664**. The body portion **5662** defines a cavity **5668** that is sized to receive a portion of a disposable loading unit **3612** therein. To properly orient the disposable loading unit **3612** within the orientation tube **5660**, the cavity **5668** has a flat locating surface **5670** formed therein. As can be seen in FIG. **128**, the flat locating surface **5670** is configured to facilitate the insertion of the disposable loading unit into the cavity

5668 in a desired or predetermined non-rotatable orientation. In addition, the end **5669** of the cavity **5668** may include a foam or cushion material **5672** that is designed to cushion the distal end of the disposable loading unit **3612** within the cavity **5668**. Also, the length of the locating surface may cooperate with a sliding support member **3689** of the axial drive assembly **3680** of the disposable loading unit **3612** to further locate the disposable loading unit **3612** at a desired position within the orientation tube **5660**.

[0322] The orientation tubes **5660** may be fabricated from Nylon, polycarbonate, polyethylene, liquid crystal polymer, 6061 or 7075 aluminum, titanium, 300 or 400 series stainless steel, coated or painted steel, plated steel, etc. and, when loaded in the replaceable tray **5662** and the locator spindle **5654** is inserted into the hollow end **5625** of spindle shaft **5624**, the orientation tubes **5660** extend through corresponding holes **5662** in the carousel top plate **5620**. Each replaceable tray **5662** is equipped with a location sensor **5663** that communicates with the control system **1003** of the controller **1001** of the robotic system **1000**. The sensor **5663** serves to identify the location of the reload system, and the number, length, color and fired status of each reload housed in the tray. In addition, an optical sensor or sensors **5665** that communicate with the robotic controller **1001** may be employed to sense the type/size/length of disposable loading units that are loaded within the tray **5662**.

[0323] Various embodiments of the automated reloading system **5600** further include a drive assembly **5680** for applying a rotary motion to the orientation tube **5660** holding the disposable loading unit **3612** to be attached to the shaft **3700** of the surgical tool **3600** (collectively the “manipulatable surgical tool portion”) that is operably coupled to the robotic system. The drive assembly **5680** includes a support yoke **5682** that is attached to the locking arm **5648**. Thus, the support yoke **5682** pivots with the locking arm **5648**. The support yoke **5682** rotatably supports a tube idler wheel **5684** and a tube drive wheel **5686** that is driven by a tube motor **5688** attached thereto. Tube motor **5688** communicates with the control system **1003** and is controlled thereby. The tube idler wheel **5684** and tube drive wheel **5686** are fabricated from, for example, natural rubber, sanoprene, isoplast, etc. such that the outer surfaces thereof create sufficient amount of friction to result in the rotation of an orientation tube **5660** in contact therewith upon activation of the tube motor **5688**. The idler wheel **5684** and tube drive wheel **5686** are oriented relative to each other to create a cradle area **5687** therebetween for receiving an orientation tube **5660** in driving engagement therein.

[0324] In use, one or more of the orientation tubes **5660** loaded in the automated reloading system **5600** are left empty, while the other orientation tubes **5660** may operably support a corresponding new disposable loading unit **3612** therein. As will be discussed in further detail below, the empty orientation tubes **5660** are employed to receive a spent disposable loading unit **3612** therein.

[0325] The automated reloading system **5600** may be employed as follows after the system **5600** is located within the work envelope of the manipulatable surgical tool portion of a robotic system. If the manipulatable surgical tool portion has a spent disposable loading unit **3612** operably coupled thereto, one of the orientation tubes **5660** that are supported on the replaceable tray **5662** is left empty to receive the spent disposable loading unit **3612** therein. If, however, the manipulatable surgical tool portion does not have a dispos-

able loading unit **3612** operably coupled thereto, each of the orientation tubes **5660** may be provided with a properly oriented new disposable loading unit **3612**.

[0326] As described hereinabove, the disposable loading unit **3612** employs a rotary “bayonet-type” coupling arrangement for operably coupling the disposable loading unit **3612** to a corresponding portion of the manipulatable surgical tool portion. That is, to attach a disposable loading unit **3612** to the corresponding portion of the manipulatable surgical tool portion (**3700**—see FIG. 77, 81), a rotary installation motion must be applied to the disposable loading unit **3612** and/or the corresponding portion of the manipulatable surgical tool portion when those components have been moved into loading engagement with each other. Such installation motions are collectively referred to herein as “loading motions”. Likewise, to decouple a spent disposable loading unit **3612** from the corresponding portion of the manipulatable surgical tool, a rotary decoupling motion must be applied to the spent disposable loading unit **3612** and/or the corresponding portion of the manipulatable surgical tool portion while simultaneously moving the spent disposable loading unit and the corresponding portion of the manipulatable surgical tool away from each other. Such decoupling motions are collectively referred to herein as “extraction motions”.

[0327] To commence the loading process, the robotic system **1000** is activated to manipulate the manipulatable surgical tool portion and/or the automated reloading system **5600** to bring the manipulatable surgical tool portion into loading engagement with the new disposable loading unit **3612** that is supported in the orientation tube **5660** that is in driving engagement with the drive assembly **5680**. Once the robotic controller **1001** (FIG. 19) of the robotic control system **1000** has located the manipulatable surgical tool portion in loading engagement with the new disposable loading unit **3612**, the robotic controller **1001** activates the drive assembly **5680** to apply a rotary loading motion to the orientation tube **5660** in which the new disposable loading unit **3612** is supported and/or applies another rotary loading motion to the corresponding portion of the manipulatable surgical tool portion. Upon application of such rotary loading motion(s), the robotic controller **1001** also causes the corresponding portion of the manipulatable surgical tool portion to be moved towards the new disposable loading unit **3612** into loading engagement therewith. Once the disposable loading unit **3612** is in loading engagement with the corresponding portion of the manipulatable tool portion, the loading motions are discontinued and the manipulatable surgical tool portion may be moved away from the automated reloading system **5600** carrying with it the new disposable loading unit **3612** that has been operably coupled thereto.

[0328] To decouple a spent disposable loading unit **3612** from a corresponding manipulatable surgical tool portion, the robotic controller **1001** of the robotic system manipulates the manipulatable surgical tool portion so as to insert the distal end of the spent disposable loading unit **3612** into the empty orientation tube **5660** that remains in driving engagement with the drive assembly **5680**. Thereafter, the robotic controller **1001** activates the drive assembly **5680** to apply a rotary extraction motion to the orientation tube **5660** in which the spent disposable loading unit **3612** is supported and/or applies a rotary extraction motion to the corresponding portion of the manipulatable surgical tool portion. The robotic controller **1001** also causes the manipulatable surgical tool

portion to withdraw away from the spent rotary disposable loading unit **3612**. Thereafter the rotary extraction motion(s) are discontinued.

[0329] After the spent disposable loading unit **3612** has been removed from the manipulatable surgical tool portion, the robotic controller **1001** may activate the carousel drive motor **5630** to index the carousel top plate **5620** to bring another orientation tube **5660** that supports a new disposable loading unit **3612** therein into driving engagement with the drive assembly **5680**. Thereafter, the loading process may be repeated to attach the new disposable loading unit **3612** therein to the portion of the manipulatable surgical tool portion. The robotic controller **1001** may record the number of disposable loading units that have been used from a particular replaceable tray **5652**. Once the controller **1001** determines that all of the new disposable loading units **3612** have been used from that tray, the controller **1001** may provide the surgeon with a signal (visual and/or audible) indicating that the tray **5652** supporting all of the spent disposable loading units **3612** must be replaced with a new tray **5652** containing new disposable loading units **3612**.

[0330] FIGS. 129-134 depicts another non-limiting embodiment of a surgical tool **6000** of the present invention that is well-adapted for use with a robotic system **1000** that has a tool drive assembly **1010** (FIG. 24) that is operatively coupled to a master controller **1001** that is operable by inputs from an operator (i.e., a surgeon). As can be seen in FIG. 129, the surgical tool **6000** includes a surgical end effector **6012** that comprises an endocutter. In at least one form, the surgical tool **6000** generally includes an elongated shaft assembly **6008** that has a proximal closure tube **6040** and a distal closure tube **6042** that are coupled together by an articulation joint **6100**. The surgical tool **6000** is operably coupled to the manipulator by a tool mounting portion, generally designated as **6200**. The surgical tool **6000** further includes an interface **6030** which may mechanically and electrically couple the tool mounting portion **6200** to the manipulator in the various manners described in detail above.

[0331] In at least one embodiment, the surgical tool **6000** includes a surgical end effector **6012** that comprises, among other things, at least one component **6024** that is selectively movable between first and second positions relative to at least one other component **6022** in response to various control motions applied to component **6024** as will be discussed in further detail below to perform a surgical procedure. In various embodiments, component **6022** comprises an elongated channel **6022** configured to operably support a surgical staple cartridge **6034** therein and component **6024** comprises a pivotally translatable clamping member, such as an anvil **6024**. Various embodiments of the surgical end effector **6012** are configured to maintain the anvil **6024** and elongated channel **6022** at a spacing that assures effective stapling and severing of tissue clamped in the surgical end effector **6012**. Unless otherwise stated, the end effector **6012** is similar to the surgical end effector **2012** described above and includes a cutting instrument (not shown) and a sled (not shown). The anvil **6024** may include a tab **6027** at its proximal end that interacts with a component of the mechanical closure system (described further below) to facilitate the opening of the anvil **6024**. The elongated channel **6022** and the anvil **6024** may be made of an electrically conductive material (such as metal) so that they may serve as part of an antenna that communicates with sensor(s) in the end effector, as described above. The surgical staple cartridge **6034** could be made of a nonconduc-

tive material (such as plastic) and the sensor may be connected to or disposed in the surgical staple cartridge **6034**, as was also described above.

[0332] As can be seen in FIG. 129, the surgical end effector **6012** is attached to the tool mounting portion **6200** by the elongated shaft assembly **6008** according to various embodiments. As shown in the illustrated embodiment, the elongated shaft assembly **6008** includes an articulation joint generally designated as **6100** that enables the surgical end effector **6012** to be selectively articulated about a first tool articulation axis AA1-AA1 that is substantially transverse to a longitudinal tool axis LT-LT and a second tool articulation axis AA2-AA2 that is substantially transverse to the longitudinal tool axis LT-LT as well as the first articulation axis AA1-AA1. See FIG. 130. In various embodiments, the elongated shaft assembly **6008** includes a closure tube assembly **6009** that comprises a proximal closure tube **6040** and a distal closure tube **6042** that are pivotably linked by a pivot links **6044** and **6046**. The closure tube assembly **6009** is movably supported on a spine assembly generally designated as **6102**.

[0333] As can be seen in FIG. 131, the proximal closure tube **6040** is pivotally linked to an intermediate closure tube joint **6043** by an upper pivot link **6044U** and a lower pivot link **6044L** such that the intermediate closure tube joint **6043** is pivotable relative to the proximal closure tube **6040** about a first closure axis CA1-CA1 and a second closure axis CA2-CA2. In various embodiments, the first closure axis CA1-CA1 is substantially parallel to the second closure axis CA2-CA2 and both closure axes CA1-CA1, CA2-CA2 are substantially transverse to the longitudinal tool axis LT-LT. As can be further seen in FIG. 131, the intermediate closure tube joint **6043** is pivotally linked to the distal closure tube **6042** by a left pivot link **6046L** and a right pivot link **6046R** such that the intermediate closure tube joint **6043** is pivotable relative to the distal closure tube **6042** about a third closure axis CA3-CA3 and a fourth closure axis CA4-CA4. In various embodiments, the third closure axis CA3-CA3 is substantially parallel to the fourth closure axis CA4-CA4 and both closure axes CA3-CA3, CA4-CA4 are substantially transverse to the first and second closure axes CA1-CA1, CA2-CA2 as well as to longitudinal tool axis LT-LT.

[0334] The closure tube assembly **6009** is configured to axially slide on the spine assembly **6102** in response to actuation motions applied thereto. The distal closure tube **6042** includes an opening **6045** which interfaces with the tab **6027** on the anvil **6024** to facilitate opening of the anvil **6024** as the distal closure tube **6042** is moved axially in the proximal direction "PD". The closure tubes **6040**, **6042** may be made of electrically conductive material (such as metal) so that they may serve as part of the antenna, as described above. Components of the spine assembly **6102** may be made of a non-conductive material (such as plastic).

[0335] As indicated above, the surgical tool **6000** includes a tool mounting portion **6200** that is configured for operable attachment to the tool mounting assembly **1010** of the robotic system **1000** in the various manners described in detail above. As can be seen in FIG. 133, the tool mounting portion **6200** comprises a tool mounting plate **6202** that operably supports a transmission arrangement **6204** thereon. In various embodiments, the transmission arrangement **6204** includes an articulation transmission **6142** that comprises a portion of an articulation system **6140** for articulating the surgical end effector **6012** about a first tool articulation axis TA1-TA1 and a second tool articulation axis TA2-TA2. The first tool articulation axis

TA1-TA1 is substantially transverse to the second tool articulation axis TA2-TA2 and both of the first and second tool articulation axes are substantially transverse to the longitudinal tool axis LT-LT. See FIG. 130.

[0336] To facilitate selective articulation of the surgical end effector 6012 about the first and second tool articulation axes TA1-TA1, TA2-TA2, the spine assembly 6102 comprises a proximal spine portion 6110 that is pivotally coupled to a distal spine portion 6120 by pivot pins 6122 for selective pivotal travel about TA1-TA1. Similarly, the distal spine portion 6120 is pivotally attached to the elongated channel 6022 of the surgical end effector 6012 by pivot pins 6124 to enable the surgical end effector 6012 to selectively pivot about the second tool axis TA2-TA2 relative to the distal spine portion 6120.

[0337] In various embodiments, the articulation system 6140 further includes a plurality of articulation elements that operably interface with the surgical end effector 6012 and an articulation control arrangement 6160 that is operably supported in the tool mounting member 6200 as will be described in further detail below. In at least one embodiment, the articulation elements comprise a first pair of first articulation cables 6144 and 6146. The first articulation cables are located on a first or right side of the longitudinal tool axis. Thus, the first articulation cables are referred to herein as a right upper cable 6144 and a right lower cable 6146. The right upper cable 6144 and the right lower cable 6146 extend through corresponding passages 6147, 6148, respectively along the right side of the proximal spine portion 6110. See FIG. 134. The articulation system 6140 further includes a second pair of second articulation cables 6150, 6152. The second articulation cables are located on a second or left side of the longitudinal tool axis. Thus, the second articulation cables are referred to herein as a left upper articulation cable 6150 and a left articulation cable 6152. The left upper articulation cable 6150 and the left lower articulation cable 6152 extend through passages 6153, 6154, respectively in the proximal spine portion 6110.

[0338] As can be seen in FIG. 130, the right upper cable 6144 extends around an upper pivot joint 6123 and is attached to a left upper side of the elongated channel 6022 at a left pivot joint 6125. The right lower cable 6146 extends around a lower pivot joint 6126 and is attached to a left lower side of the elongated channel 6022 at left pivot joint 6125. The left upper cable 6150 extends around the upper pivot joint 6123 and is attached to a right upper side of the elongated channel 6022 at a right pivot joint 6127. The left lower cable 6152 extends around the lower pivot joint 6126 and is attached to a right lower side of the elongated channel 6022 at right pivot joint 6127. Thus, to pivot the surgical end effector 6012 about the first tool articulation axis TA1-TA1 to the left (arrow "L"), the right upper cable 6144 and the right lower cable 6146 must be pulled in the proximal direction "PD". To articulate the surgical end effector 6012 to the right (arrow "R") about the first tool articulation axis TA1-TA1, the left upper cable 6150 and the left lower cable 6152 must be pulled in the proximal direction "PD". To articulate the surgical end effector 6012 about the second tool articulation axis TA2-TA2, in an upward direction (arrow "U"), the right upper cable 6144 and the left upper cable 6150 must be pulled in the proximal direction "PD". To articulate the surgical end effector 6012 in the downward direction (arrow "DW") about the second tool articulation axis TA2-TA2, the right lower cable 6146 and the left lower cable 6152 must be pulled in the proximal direction "PD".

[0339] The proximal ends of the articulation cables 6144, 6146, 6150, 6152 are coupled to the articulation control arrangement 6160 which comprises a ball joint assembly that is a part of the articulation transmission 6142. More specifically and with reference to FIG. 134, the ball joint assembly 6160 includes a ball-shaped member 6162 that is formed on a proximal portion of the proximal spine 6110. Movably supported on the ball-shaped member 6162 is an articulation control ring 6164. As can be further seen in FIG. 134, the proximal ends of the articulation cables 6144, 6146, 6150, 6152 are coupled to the articulation control ring 6164 by corresponding ball joint arrangements 6166. The articulation control ring 6164 is controlled by an articulation drive assembly 6170. As can be most particularly seen in FIG. 134, the proximal ends of the first articulation cables 6144, 6146 are attached to the articulation control ring 6164 at corresponding spaced first points 6149, 6151 that are located on plane 6159. Likewise, the proximal ends of the second articulation cables 6150, 6152 are attached to the articulation control ring 6164 at corresponding spaced second points 6153, 6155 that are also located along plane 6159. As the present Detailed Description proceeds, those of ordinary skill in the art will appreciate that such cable attachment configuration on the articulation control ring 6164 facilitates the desired range of articulation motions as the articulation control ring 6164 is manipulated by the articulation drive assembly 6170.

[0340] In various forms, the articulation drive assembly 6170 comprises a horizontal articulation assembly generally designated as 6171. In at least one form, the horizontal articulation assembly 6171 comprises a horizontal push cable 6172 that is attached to a horizontal gear arrangement 6180. The articulation drive assembly 6170 further comprises a vertical articulation assembly generally designated as 6173. In at least one form, the vertical articulation assembly 6173 comprises a vertical push cable 6174 that is attached to a vertical gear arrangement 6190. As can be seen in FIGS. 133 and 134, the horizontal push cable 6172 extends through a support plate 6167 that is attached to the proximal spine portion 6110. The distal end of the horizontal push cable 6174 is attached to the articulation control ring 6164 by a corresponding ball/pivot joint 6168. The vertical push cable 6174 extends through the support plate 6167 and the distal end thereof is attached to the articulation control ring 6164 by a corresponding ball/pivot joint 6169.

[0341] The horizontal gear arrangement 6180 includes a horizontal driven gear 6182 that is pivotally mounted on a horizontal shaft 6181 that is attached to a proximal portion of the proximal spine portion 6110. The proximal end of the horizontal push cable 6172 is pivotally attached to the horizontal driven gear 6182 such that, as the horizontal driven gear 6172 is rotated about horizontal pivot axis HA, the horizontal push cable 6172 applies a first pivot motion to the articulation control ring 6164. Likewise, the vertical gear arrangement 6190 includes a vertical driven gear 6192 that is pivotally supported on a vertical shaft 6191 attached to the proximal portion of the proximal spine portion 6110 for pivotal travel about a vertical pivot axis VA. The proximal end of the vertical push cable 6174 is pivotally attached to the vertical driven gear 6192 such that as the vertical driven gear 6192 is rotated about vertical pivot axis VA, the vertical push cable 6174 applies a second pivot motion to the articulation control ring 6164.

[0342] The horizontal driven gear 6182 and the vertical driven gear 6192 are driven by an articulation gear train 6300

that operably interfaces with an articulation shifter assembly 6320. In at least one form, the articulation shifter assembly comprises an articulation drive gear 6322 that is coupled to a corresponding one of the driven discs or elements 1304 on the adapter side 1307 of the tool mounting plate 6202. See FIG. 28. Thus, application of a rotary input motion from the robotic system 1000 through the tool drive assembly 1010 to the corresponding driven element 1304 will cause rotation of the articulation drive gear 6322 when the interface 1230 is coupled to the tool holder 1270. An articulation driven gear 6324 is attached to a splined shifter shaft 6330 that is rotatably supported on the tool mounting plate 6202. The articulation driven gear 6324 is in meshing engagement with the articulation drive gear 6322 as shown. Thus, rotation of the articulation drive gear 6322 will result in the rotation of the shaft 6330. In various forms, a shifter driven gear assembly 6340 is movably supported on the splined portion 6332 of the shifter shaft 6330.

[0343] In various embodiments, the shifter driven gear assembly 6340 includes a driven shifter gear 6342 that is attached to a shifter plate 6344. The shifter plate 6344 operably interfaces with a shifter solenoid assembly 6350. The shifter solenoid assembly 6350 is coupled to corresponding pins 6352 by conductors 6352. See FIG. 133. Pins 6352 are oriented to electrically communicate with slots 1258 (FIG. 27) on the tool side 1244 of the adaptor 1240. Such arrangement serves to electrically couple the shifter solenoid assembly 6350 to the robotic controller 1001. Thus, activation of the shifter solenoid 6350 will shift the shifter driven gear assembly 6340 on the splined portion 6332 of the shifter shaft 6330 as represented by arrow “S” in FIGS. 133 and 134. Various embodiments of the articulation gear train 6300 further include a horizontal gear assembly 6360 that includes a first horizontal drive gear 6362 that is mounted on a shaft 6361 that is rotatably attached to the tool mounting plate 6202. The first horizontal drive gear 6362 is supported in meshing engagement with a second horizontal drive gear 6364. As can be seen in FIG. 134, the horizontal driven gear 6182 is in meshing engagement with the distal face portion 6365 of the second horizontal driven gear 6364.

[0344] Various embodiments of the articulation gear train 6300 further include a vertical gear assembly 6370 that includes a first vertical drive gear 6372 that is mounted on a shaft 6371 that is rotatably supported on the tool mounting plate 6202. The first vertical drive gear 6372 is supported in meshing engagement with a second vertical drive gear 6374 that is concentrically supported with the second horizontal drive gear 6364. The second vertical drive gear 6374 is rotatably supported on the proximal spine portion 6110 for travel therearound. The second horizontal drive gear 6364 is rotatably supported on a portion of said second vertical drive gear 6374 for independent rotatable travel thereon. As can be seen in FIG. 134, the vertical driven gear 6192 is in meshing engagement with the distal face portion 6375 of the second vertical driven gear 6374.

[0345] In various forms, the first horizontal drive gear 6362 has a first diameter and the first vertical drive gear 6372 has a second diameter. As can be seen in FIGS. 133 and 134, the shaft 6361 is not on a common axis with shaft 6371. That is, the first horizontal driven gear 6362 and the first vertical driven gear 6372 do not rotate about a common axis. Thus, when the shifter gear 6342 is positioned in a center “locking” position such that the shifter gear 6342 is in meshing engagement with both the first horizontal driven gear 6362 and the

first vertical drive gear 6372, the components of the articulation system 6140 are locked in position. Thus, the shiftable shifter gear 6342 and the arrangement of first horizontal and vertical drive gears 6362, 6372 as well as the articulation shifter assembly 6320 collectively may be referred to as an articulation locking system, generally designated as 6380.

[0346] In use, the robotic controller 1001 of the robotic system 1000 may control the articulation system 6140 as follows. To articulate the end effector 6012 to the left about the first tool articulation axis TA1-TA1, the robotic controller 1001 activates the shifter solenoid assembly 6350 to bring the shifter gear 6342 into meshing engagement with the first horizontal drive gear 6362. Thereafter, the controller 1001 causes a first rotary output motion to be applied to the articulation drive gear 6322 to drive the shifter gear in a first direction to ultimately drive the horizontal driven gear 6182 in another first direction. The horizontal driven gear 6182 is driven to pivot the articulation ring 6164 on the ball-shaped portion 6162 to thereby pull right upper cable 6144 and the right lower cable 6146 in the proximal direction “PD”. To articulate the end effector 6012 to the right about the first tool articulation axis TA1-TA1, the robotic controller 1001 activates the shifter solenoid assembly 6350 to bring the shifter gear 6342 into meshing engagement with the first horizontal drive gear 6362. Thereafter, the controller 1001 causes the first rotary output motion in an opposite direction to be applied to the articulation drive gear 6322 to drive the shifter gear 6342 in a second direction to ultimately drive the horizontal driven gear 6182 in another second direction. Such actions result in the articulation control ring 6164 moving in such a manner as to pull the left upper cable 6150 and the left lower cable 6152 in the proximal direction “PD”. In various embodiments the gear ratios and frictional forces generated between the gears of the vertical gear assembly 6370 serve to prevent rotation of the vertical driven gear 6192 as the horizontal gear assembly 6360 is actuated.

[0347] To articulate the end effector 6012 in the upper direction about the second tool articulation axis TA2-TA2, the robotic controller 1001 activates the shifter solenoid assembly 6350 to bring the shifter gear 6342 into meshing engagement with the first vertical drive gear 6372. Thereafter, the controller 1001 causes the first rotary output motion to be applied to the articulation drive gear 6322 to drive the shifter gear 6342 in a first direction to ultimately drive the vertical driven gear 6192 in another first direction. The vertical driven gear 6192 is driven to pivot the articulation ring 6164 on the ball-shaped portion 6162 of the proximal spine portion 6110 to thereby pull right upper cable 6144 and the left upper cable 6150 in the proximal direction “PD”. To articulate the end effector 6012 in the downward direction about the second tool articulation axis TA2-TA2, the robotic controller 1001 activates the shifter solenoid assembly 6350 to bring the shifter gear 6342 into meshing engagement with the first vertical drive gear 6372. Thereafter, the controller 1001 causes the first rotary output motion to be applied in an opposite direction to the articulation drive gear 6322 to drive the shifter gear 6342 in a second direction to ultimately drive the vertical driven gear 6192 in another second direction. Such actions thereby cause the articulation control ring 6164 to pull the right lower cable 6146 and the left lower cable 6152 in the proximal direction “PD”. In various embodiments, the gear ratios and frictional forces generated between the gears of the

horizontal gear assembly **6360** serve to prevent rotation of the horizontal driven gear **6182** as the vertical gear assembly **6370** is actuated.

[0348] In various embodiments, a variety of sensors may communicate with the robotic controller **1001** to determine the articulated position of the end effector **6012**. Such sensors may interface with, for example, the articulation joint **6100** or be located within the tool mounting portion **6200**. For example, sensors may be employed to detect the position of the articulation control ring **6164** on the ball-shaped portion **6162** of the proximal spine portion **6110**. Such feedback from the sensors to the controller **1001** permits the controller **1001** to adjust the amount of rotation and the direction of the rotary output to the articulation drive gear **6322**. Further, as indicated above, when the shifter drive gear **6342** is centrally positioned in meshing engagement with the first horizontal drive gear **6362** and the first vertical drive gear **6372**, the end effector **6012** is locked in the articulated position. Thus, after the desired amount of articulation has been attained, the controller **1001** may activate the shifter solenoid assembly **6350** to bring the shifter gear **6342** into meshing engagement with the first horizontal drive gear **6362** and the first vertical drive gear **6372**. In alternative embodiments, the shifter solenoid assembly **6350** may be spring activated to the central locked position.

[0349] In use, it may be desirable to rotate the surgical end effector **6012** about the longitudinal tool axis LT-LT. In at least one embodiment, the transmission arrangement **6204** on the tool mounting portion includes a rotational transmission assembly **6400** that is configured to receive a corresponding rotary output motion from the tool drive assembly **1010** of the robotic system **1000** and convert that rotary output motion to a rotary control motion for rotating the elongated shaft assembly **6008** (and surgical end effector **6012**) about the longitudinal tool axis LT-LT. In various embodiments, for example, a proximal end portion **6041** of the proximal closure tube **6040** is rotatably supported on the tool mounting plate **6202** of the tool mounting portion **6200** by a forward support cradle **6205** and a closure sled **6510** that is also movably supported on the tool mounting plate **6202**. In at least one form, the rotational transmission assembly **6400** includes a tube gear segment **6402** that is formed on (or attached to) the proximal end **6041** of the proximal closure tube **6040** for operable engagement by a rotational gear assembly **6410** that is operably supported on the tool mounting plate **6202**. As can be seen in FIG. 133, the rotational gear assembly **6410**, in at least one embodiment, comprises a rotation drive gear **6412** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **6202** when the tool mounting portion **6200** is coupled to the tool drive assembly **1010**. See FIG. 28. The rotational gear assembly **6410** further comprises a first rotary driven gear **6414** that is rotatably supported on the tool mounting plate **6202** in meshing engagement with the rotation drive gear **6412**. The first rotary driven gear **6414** is attached to a drive shaft **6416** that is rotatably supported on the tool mounting plate **6202**. A second rotary driven gear **6418** is attached to the drive shaft **6416** and is in meshing engagement with tube gear segment **6402** on the proximal closure tube **6040**. Application of a second rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding driven element **1304** will thereby cause rotation of the rotation drive gear **6412**. Rotation of the rotation drive gear **6412** ultimately results in the rotation of the elongated shaft assembly **6008**

(and the surgical end effector **6012**) about the longitudinal tool axis LT-LT. It will be appreciated that the application of a rotary output motion from the tool drive assembly **1010** in one direction will result in the rotation of the elongated shaft assembly **6008** and surgical end effector **6012** about the longitudinal tool axis LT-LT in a first direction and an application of the rotary output motion in an opposite direction will result in the rotation of the elongated shaft assembly **6008** and surgical end effector **6012** in a second direction that is opposite to the first direction.

[0350] In at least one embodiment, the closure of the anvil **2024** relative to the staple cartridge **2034** is accomplished by axially moving a closure portion of the elongated shaft assembly **2008** in the distal direction “DD” on the spine assembly **2049**. As indicated above, in various embodiments, the proximal end portion **6041** of the proximal closure tube **6040** is supported by the closure sled **6510** which comprises a portion of a closure transmission, generally depicted as **6512**. As can be seen in FIG. 133, the proximal end portion **6041** of the proximal closure tube portion **6040** has a collar **6048** formed thereon. The closure sled **6510** is coupled to the collar **6048** by a yoke **6514** that engages an annular groove **6049** in the collar **6048**. Such arrangement serves to enable the collar **6048** to rotate about the longitudinal tool axis LT-LT while still being coupled to the closure transmission **6512**. In various embodiments, the closure sled **6510** has an upstanding portion **6516** that has a closure rack gear **6518** formed thereon. The closure rack gear **6518** is configured for driving engagement with a closure gear assembly **6520**. See FIG. 133.

[0351] In various forms, the closure gear assembly **6520** includes a closure spur gear **6522** that is coupled to a corresponding second one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **6202**. See FIG. 28. Thus, application of a third rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **6522** when the tool mounting portion **6202** is coupled to the tool drive assembly **1010**. The closure gear assembly **6520** further includes a closure reduction gear set **6524** that is supported in meshing engagement with the closure spur gear **6522** and the closure rack gear **2106**. Thus, application of a third rotary output motion from the tool drive assembly **1010** of the robotic system **1000** to the corresponding second driven element **1304** will cause rotation of the closure spur gear **6522** and the closure transmission **6512** and ultimately drive the closure sled **6510** and the proximal closure tube **6040** axially on the proximal spine portion **6110**. The axial direction in which the proximal closure tube **6040** moves ultimately depends upon the direction in which the third driven element **1304** is rotated. For example, in response to one rotary output motion received from the tool drive assembly **1010** of the robotic system **1000**, the closure sled **6510** will be driven in the distal direction “DD” and ultimately drive the proximal closure tube **6040** in the distal direction “DD”. As the proximal closure tube **6040** is driven distally, the distal closure tube **6042** is also driven distally by virtue of its connection with the proximal closure tube **6040**. As the distal closure tube **6042** is driven distally, the end of the closure tube **6042** will engage a portion of the anvil **6024** and cause the anvil **6024** to pivot to a closed position. Upon application of an “opening” output motion from the tool drive assembly **1010** of the robotic system **1000**, the closure sled **6510** and the proximal closure tube **6040** will

be driven in the proximal direction “PD” on the proximal spine portion **6110**. As the proximal closure tube **6040** is driven in the proximal direction “PD”, the distal closure tube **6042** will also be driven in the proximal direction “PD”. As the distal closure tube **6042** is driven in the proximal direction “PD”, the opening **6045** therein interacts with the tab **6027** on the anvil **6024** to facilitate the opening thereof. In various embodiments, a spring (not shown) may be employed to bias the anvil **6024** to the open position when the distal closure tube **6042** has been moved to its starting position. In various embodiments, the various gears of the closure gear assembly **6520** are sized to generate the necessary closure forces needed to satisfactorily close the anvil **6024** onto the tissue to be cut and stapled by the surgical end effector **6012**. For example, the gears of the closure transmission **6520** may be sized to generate approximately 70-120 pounds of closure forces.

[0352] In various embodiments, the cutting instrument is driven through the surgical end effector **6012** by a knife bar **6530**. See FIG. 133. In at least one form, the knife bar **6530** is fabricated with a joint arrangement (not shown) and/or is fabricated from material that can accommodate the articulation of the surgical end effector **6102** about the first and second tool articulation axes while remaining sufficiently rigid so as to push the cutting instrument through tissue clamped in the surgical end effector **6012**. The knife bar **6530** extends through a hollow passage **6532** in the proximal spine portion **6110**.

[0353] In various embodiments, a proximal end **6534** of the knife bar **6530** is rotatably affixed to a knife rack gear **6540** such that the knife bar **6530** is free to rotate relative to the knife rack gear **6540**. The distal end of the knife bar **6530** is attached to the cutting instrument in the various manners described above. As can be seen in FIG. 133, the knife rack gear **6540** is slidably supported within a rack housing **6542** that is attached to the tool mounting plate **6202** such that the knife rack gear **6540** is retained in meshing engagement with a knife drive transmission portion **6550** of the transmission arrangement **6204**. In various embodiments, the knife drive transmission portion **6550** comprises a knife gear assembly **6560**. More specifically and with reference to FIG. 133, in at least one embodiment, the knife gear assembly **6560** includes a knife spur gear **6562** that is coupled to a corresponding fourth one of the driven discs or elements **1304** on the adapter side **1307** of the tool mounting plate **6202**. See FIG. 28. Thus, application of another rotary output motion from the robotic system **1000** through the tool drive assembly **1010** to the corresponding fourth driven element **1304** will cause rotation of the knife spur gear **6562**. The knife gear assembly **6560** further includes a knife gear reduction set **6564** that includes a first knife driven gear **6566** and a second knife drive gear **6568**. The knife gear reduction set **6564** is rotatably mounted to the tool mounting plate **6202** such that the first knife driven gear **6566** is in meshing engagement with the knife spur gear **6562**. Likewise, the second knife drive gear **6568** is in meshing engagement with a third knife drive gear assembly **6570**. As shown in FIG. 133, the second knife driven gear **6568** is in meshing engagement with a fourth knife driven gear **6572** of the third knife drive gear assembly **6570**. The fourth knife driven gear **6572** is in meshing engagement with a fifth knife driven gear assembly **6574** that is in meshing engagement with the knife rack gear **6540**. In various embodiments, the gears of the knife gear assembly **6560** are sized to generate the forces needed to drive the cutting instrument through the

tissue clamped in the surgical end effector **6012** and actuate the staples therein. For example, the gears of the knife gear assembly **6560** may be sized to generate approximately 40 to 100 pounds of driving force. It will be appreciated that the application of a rotary output motion from the tool drive assembly **1010** in one direction will result in the axial movement of the cutting instrument in a distal direction and application of the rotary output motion in an opposite direction will result in the axial travel of the cutting instrument in a proximal direction.

[0354] As can be appreciated from the foregoing description, the surgical tool **6000** represents a vast improvement over prior robotic tool arrangements. The unique and novel transmission arrangement employed by the surgical tool **6000** enables the tool to be operably coupled to a tool holder portion **1010** of a robotic system that only has four rotary output bodies, yet obtain the rotary output motions therefrom to: (i) articulate the end effector about two different articulation axes that are substantially transverse to each other as well as the longitudinal tool axis; (ii) rotate the end effector **6012** about the longitudinal tool axis; (iii) close the anvil **6024** relative to the surgical staple cartridge **6034** to varying degrees to enable the end effector **6012** to be used to manipulate tissue and then clamp it into position for cutting and stapling; and (iv) firing the cutting instrument to cut through the tissue clamped within the end effector **6012**. The unique and novel shifter arrangements of various embodiments of the present invention described above enable two different articulation actions to be powered from a single rotatable body portion of the robotic system.

[0355] The various embodiments of the present invention have been described above in connection with cutting-type surgical instruments. It should be noted, however, that in other embodiments, the inventive surgical instrument disclosed herein need not be a cutting-type surgical instrument, but rather could be used in any type of surgical instrument including remote sensor transponders. For example, it could be a non-cutting endoscopic instrument, a grasper, a stapler, a clip applier, an access device, a drug/gene therapy delivery device, an energy device using ultrasound, RF, laser, etc. In addition, the present invention may be in laparoscopic instruments, for example. The present invention also has application in conventional endoscopic and open surgical instrumentation as well as robotic-assisted surgery.

[0356] FIG. 135 depicts use of various aspects of certain embodiments of the present invention in connection with a surgical tool **7000** that has an ultrasonically powered end effector **7012**. The end effector **7012** is operably attached to a tool mounting portion **7100** by an elongated shaft assembly **7008**. The tool mounting portion **7100** may be substantially similar to the various tool mounting portions described hereinabove. In one embodiment, the end effector **7012** includes an ultrasonically powered jaw portion **7014** that is powered by alternating current or direct current in a known manner. Such ultrasonically-powered devices are disclosed, for example, in U.S. Pat. No. 6,783,524, entitled ROBOTIC SURGICAL TOOL WITH ULTRASOUND CAUTERIZING AND CUTTING INSTRUMENT, the entire disclosure of which is herein incorporated by reference. In the illustrated embodiment, a separate power cord **7020** is shown. It will be understood, however, that the power may be supplied thereto from the robotic controller **1001** through the tool mounting portion **7100**. The surgical end effector **7012** further includes a movable jaw **7016** that may be used to clamp tissue onto the

ultrasonic jaw portion **7014**. The movable jaw portion **7016** may be selectively actuated by the robotic controller **1001** through the tool mounting portion **7100** in anyone of the various manners herein described.

[0357] FIG. 136 illustrates use of various aspects of certain embodiments of the present invention in connection with a surgical tool **8000** that has an end effector **8012** that comprises a linear stapling device. The end effector **8012** is operably attached to a tool mounting portion **8100** by an elongated shaft assembly **3700** of the type and construction describe above. However, the end effector **8012** may be attached to the tool mounting portion **8100** by a variety of other elongated shaft assemblies described herein. In one embodiment, the tool mounting portion **8100** may be substantially similar to tool mounting portion **3750**. However, various other tool mounting portions and their respective transmission arrangements describe in detail herein may also be employed. Such linear stapling head portions are also disclosed, for example, in U.S. Pat. No. 7,673,781, entitled SURGICAL STAPLING DEVICE WITH STAPLE DRIVER THAT SUPPORTS MULTIPLE-WIRE DIAMETER STAPLES, the entire disclosure of which is herein incorporated by reference.

[0358] Various sensor embodiments described in U.S. Patent Application Publication No. 2011/0062212, now U.S. Pat. No. 8,167,185, the disclosure of which is herein incorporated by reference in its entirety, may be employed with many of the surgical tool embodiments disclosed herein. As was indicated above, the master controller **1001** generally includes master controllers (generally represented by **1003**) which are grasped by the surgeon and manipulated in space while the surgeon views the procedure via a stereo display **1002**. See FIG. 1. The master controllers **1001** are manual input devices which preferably move with multiple degrees of freedom, and which often further have an actuatable handle for actuating the surgical tools. Some of the surgical tool embodiments disclosed herein employ a motor or motors in their tool drive portion to supply various control motions to the tool's end effector. Such embodiments may also obtain additional control motion(s) from the motor arrangement employed in the robotic system components. Other embodiments disclosed herein obtain all of the control motions from motor arrangements within the robotic system.

[0359] Such motor powered arrangements may employ various sensor arrangements that are disclosed in the published U.S. patent application cited above to provide the surgeon with a variety of forms of feedback without departing from the spirit and scope of the present invention. For example, those master controller arrangements **1003** that employ a manually actuatable firing trigger can employ run motor sensor(s) (not shown) to provide the surgeon with feedback relating to the amount of force applied to or being experienced by the cutting member. The run motor sensor(s) may be configured for communication with the firing trigger portion to detect when the firing trigger portion has been actuated to commence the cutting/stapling operation by the end effector. The run motor sensor may be a proportional sensor such as, for example, a rheostat or variable resistor. When the firing trigger is drawn in, the sensor detects the movement, and sends an electrical signal indicative of the voltage (or power) to be supplied to the corresponding motor. When the sensor is a variable resistor or the like, the rotation of the motor may be generally proportional to the amount of movement of the firing trigger. That is, if the operator only draws or closes the firing trigger in a small amount, the

rotation of the motor is relatively low. When the firing trigger is fully drawn in (or in the fully closed position), the rotation of the motor is at its maximum. In other words, the harder the surgeon pulls on the firing trigger, the more voltage is applied to the motor causing greater rates of rotation. Other arrangements may provide the surgeon with a feed back meter **1005** that may be viewed through the display **1002** and provide the surgeon with a visual indication of the amount of force being applied to the cutting instrument or dynamic clamping member. Other sensor arrangements may be employed to provide the master controller **1001** with an indication as to whether a staple cartridge has been loaded into the end effector, whether the anvil has been moved to a closed position prior to firing, etc.

[0360] In alternative embodiments, a motor-controlled interface may be employed in connection with the controller **1001** that limit the maximum trigger pull based on the amount of loading (e.g., clamping force, cutting force, etc.) experienced by the surgical end effector. For example, the harder it is to drive the cutting instrument through the tissue clamped within the end effector, the harder it would be to pull/actuate the activation trigger. In still other embodiments, the trigger on the controller **1001** is arranged such that the trigger pull location is proportionate to the end effector-location/condition. For example, the trigger is only fully depressed when the end effector is fully fired.

[0361] The devices disclosed herein can be designed to be disposed of after a single use, or they can be designed to be used multiple times. In either case, however, the device can be reconditioned for reuse after at least one use. Reconditioning can include any combination of the steps of disassembly of the device, followed by cleaning or replacement of particular pieces, and subsequent reassembly. In particular, the device can be disassembled, and any number of the particular pieces or parts of the device can be selectively replaced or removed in any combination. Upon cleaning and/or replacement of particular parts, the device can be reassembled for subsequent use either at a reconditioning facility, or by a surgical team immediately prior to a surgical procedure. Those skilled in the art will appreciate that reconditioning of a device can utilize a variety of techniques for disassembly, cleaning/replacement, and reassembly. Use of such techniques, and the resulting reconditioned device, are all within the scope of the present application.

[0362] Although the present invention has been described herein in connection with certain disclosed embodiments, many modifications and variations to those embodiments may be implemented. For example, different types of end effectors may be employed. Also, where materials are disclosed for certain components, other materials may be used. The foregoing description and following claims are intended to cover all such modification and variations.

[0363] Any patent, publication, or other disclosure material, in whole or in part, that is said to be incorporated by reference herein is incorporated herein only to the extent that the incorporated materials does not conflict with existing definitions, statements, or other disclosure material set forth in this disclosure. As such, and to the extent necessary, the disclosure as explicitly set forth herein supersedes any conflicting material incorporated herein by reference. Any material, or portion thereof, that is said to be incorporated by reference herein, but which conflicts with existing definitions, statements, or other disclosure material set forth herein

will only be incorporated to the extent that no conflict arises between that incorporated material and the existing disclosure material.

What is claimed is:

1. A surgical instrument comprising:
 - an implement portion responsive to firing motions applied thereto from a robotic system, the implement portion comprising:
 - an elongate channel configured for attachment to an elongated shaft operably interfacing with said robotic system and including a channel slot,
 - a staple cartridge received by the elongate channel and incorporating a proximally positioned wedge member aligned to cam upward a driver supporting a staple,
 - an anvil pivotally coupled to the elongate channel and including an anvil channel comprising a vertical slot inwardly open along a longitudinal axis of the anvil and comprising left and right rectangular prism-shaped recesses communicating with, bisected by, and transverse to the vertical slot, wherein said left and right rectangular prism-shaped recesses extend substantially along the longitudinal length of the vertical slot,
 - a firing device including a distally presented cutting edge longitudinally received between the elongate channel and the vertical slot of the anvil channel of the anvil,
 - an upper member comprised of left and right lateral upper pins sized to slidably engage upper and lower inner surfaces of the left and right rectangular-shaped recesses of the anvil channel,
 - a lower member engaging the channel slot, and
 - a middle member operable to actuate the staple cartridge by distally translating the wedge member of the staple cartridge, the firing device positively engaging both the elongate channel and the anvil during longitudinal firing travel to provide spacing therebetween for staple formation, and wherein engagement of the firing device during firing maintains vertical spacing between the elongate channel and the anvil resisting both pinching due to an inadequate clamped tissue and partial opening due to an excessive amount of clamped tissue.
2. The surgical instrument of claim 1, wherein the anvil forms an inwardly biased relation to the elongate channel configured to assist the firing device in affirmatively spacing between the anvil and elongate channel during actuation of the staple cartridge.
3. The surgical instrument of claim 2, further comprising a closure member operatively configured to longitudinally transfer the closure motion to the implement portion to inwardly bias distal ends of the anvil and the elongate channel to assist the firing device in affirmatively spacing the anvil and elongate channel during actuation of the staple cartridge.
4. The surgical instrument of claim 1, wherein the staple cartridge is a selected type of a plurality of staple cartridge types, each staple cartridge type characterized by a thickness selected for a desired spacing between the anvil and elongate channel and characterized by staples having a length suitable for the desired spacing.
5. The surgical instrument of claim 4, wherein the wedge member comprises a wedge sled having a plurality of connected camming wedges each having a preselected height configured for the selected type of staple cartridge, the middle member of the firing device oriented to abut each of the plurality of staple cartridge types.
6. A surgical instrument comprising:
 - an implement portion responsive to firing motions from a robotic system communicating therewith and being diametrically dimensioned for endo-surgical use, the implement portion comprising:
 - an elongate channel coupled to an elongated shaft operably interfacing with said robotic system and including a channel slot;
 - an anvil pivotally coupled to the elongate channel, responsive to closing motions generated by said robotic system and applied thereto by the elongated shaft, and including an anvil channel; and
 - a firing device including a distally presented cutting edge longitudinally received between the elongate channel and the anvil, the firing device configured to affirmatively space the anvil from the elongate channel during longitudinal travel between the anvil and elongate channel, wherein the firing device is configured to affirmatively space the anvil from the elongate channel during longitudinal travel between the anvil and elongate channel by including an upper member having an upper surface and a lower surface that longitudinally slidably engage the anvil.
7. The surgical instrument of claim 6, further comprising a staple cartridge engaged by the elongate channel and including a proximally opened slot for receiving the cutting edge of the firing device, the staple cartridge including a plurality of staples cammed upwardly by the distal longitudinal movement of the firing mechanism.
8. The surgical instrument of claim 7, wherein the staple cartridge further includes a plurality of drivers supporting the plurality of staples and a wedge sled responsive to the distal longitudinal movement of the firing mechanism to cam upwardly the drivers and thus form the plurality of staples against the anvil.
9. The surgical instrument of claim 7, wherein the anvil forms an inwardly biased relation to the elongate channel configured to assist the firing device in affirmatively spacing between the anvil and elongate channel during actuation of the staple cartridge.
10. The surgical instrument of claim 7, wherein the staple cartridge is a selected type of a plurality of staple cartridge types, each staple cartridge type characterized by a thickness selected for a desired spacing between the anvil and elongate channel and characterized by staples having a length suitable for the desired spacing.
11. The surgical instrument of claim 10, wherein the wedge sled comprises a plurality of connected camming wedges each having a preselected height configured for the selected type of staple cartridge, the middle member of the firing device oriented to abut each of the plurality of staple cartridge types.
12. The surgical instrument of claim 6, wherein the anvil includes a longitudinal slot having an upper surface and a lower surface that slidably abut respectively the lower surface and upper surface of the upper member of the firing device.
13. The surgical instrument of claim 12, wherein the longitudinal slot comprises an internal longitudinal channel communicating with a narrowed vertical slot, and wherein the firing device translates in the narrowed vertical slot and includes an upper member having the upper and lower surfaces that reside within the internal longitudinal channel for affirmatively spacing the anvil from the elongate channel.

14. The surgical instrument of claim **6**, wherein the firing device is configured to affirmatively space the anvil from the elongate channel during longitudinal travel between the anvil and elongate channel by including a lower portion having an upper surface and a lower surface that slidably engage the elongate channel.

15. The surgical instrument of claim **14**, wherein the lower portion of the firing device comprises a lower pin having the upper surface abutting the elongate channel and comprises a middle pin having the lower surface oppositely abutting the elongate channel.

16. The surgical instrument of claim **15**, wherein the firing device further comprises an upper member having an upper surface and a lower surface that longitudinally slidably engage the anvil.

17. The surgical instrument of claim **16**, wherein the anvil includes an internal longitudinal slot having a narrowed vertical slot, and wherein the firing device translates in the narrowed vertical slot and includes an upper member having upper and lower surfaces that reside within the internal longitudinal slot for affirmatively spacing the anvil from the elongate channel.

18. A surgical instrument comprising:

- a robotic system operable to produce a plurality of control motions including a firing motion; and
- an implement portion responsive to said firing motion from the robotic system, the implement portion comprising:
 - an elongate channel coupled to the robotic system and including a channel slot;
 - a staple cartridge received by the elongate channel and incorporating a proximally positioned wedge member aligned to cam upward a driver supporting a staple;

- an anvil pivotally coupled to the elongate channel and including an anvil channel;

- a firing device including a distally presented cutting edge longitudinally received between the elongate channel and the anvil;

- an upper member engageable to the anvil channel;

- a lower member engaging the channel slot;

- middle member operable to actuate the staple cartridge by distally translating the edge member of the staple cartridge, the firing device positively engaging both the elongate channel and the anvil during longitudinal firing travel to provide spacing therebetween for staple formation;

- articulation joint proximally coupled to the elongate channel; and

- a thinned firing strip proximally attached to the firing device for transferring the firing motion from the robotic system through the articulation joint.

19. The surgical instrument of claim **18**, wherein the anvil forms a pivotal attachment to the elongate channel inwardly biased at respective distal ends to assist the firing device in affirmatively spacing between the anvil and elongate channel during actuation of the staple cartridge.

20. The surgical instrument of claim **18**, wherein the staple cartridge is a selected type of a plurality of staple cartridge types, each staple cartridge type characterized by a thickness selected for a desired spacing between the anvil and elongate channel and characterized by staples having a length suitable for the desired spacing.

* * * * *

专利名称(译)	带电子束驱动器的机器人驱动手术器械		
公开(公告)号	US20160242780A1	公开(公告)日	2016-08-25
申请号	US15/141439	申请日	2016-04-28
[标]申请(专利权)人(译)	爱惜康内镜外科，LLC		
申请(专利权)人(译)	爱惜康内镜外科，LLC		
当前申请(专利权)人(译)	爱惜康内镜外科，LLC		
[标]发明人	SHELTON IV FREDERICK E SETSER MICHAEL E WEISENBURGH II WILLIAM B		
发明人	SHELTON, IV, FREDERICK E. SETSER, MICHAEL E. WEISENBURGH, II, WILLIAM B.		
IPC分类号	A61B17/10 A61B17/068		
CPC分类号	A61B17/07207 A61B50/36 A61B2017/07278 A61B2017/00017 A61B2017/00398 A61B2017/00473 A61B2017/00734 A61B2017/0688 A61B2017/2923 A61B2017/2927 A61B2017/320052 A61B2018 /0063 A61B17/072 A61B17/320092 A61B18/1445 A61B2034/302 A61B17/0682 A61B17/068 A61B17 /064 A61B17/105 A61B34/30 A61B50/20 A61B34/37 A61B2017/07271 A61B2017/07285 A61B2017 /320094 A61B2017/320095 A61B2017/320097 A61B2018/00607 A61B2017/07257 A61B2017/320093		
其他公开文献	US9913648		
外部链接	Espacenet USPTO		

摘要(译)

适用于腹腔镜和内窥镜临床手术的外科切断和缝合器械将组织夹在由砧座枢转地相对的细长通道的末端执行器内。各种实施例被配置为可操作地附接到机器人系统以从其接收致动/控制运动。

